

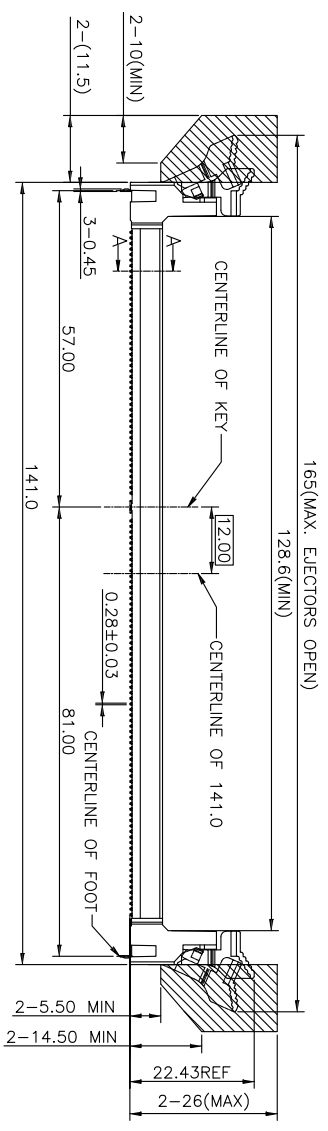


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/29/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

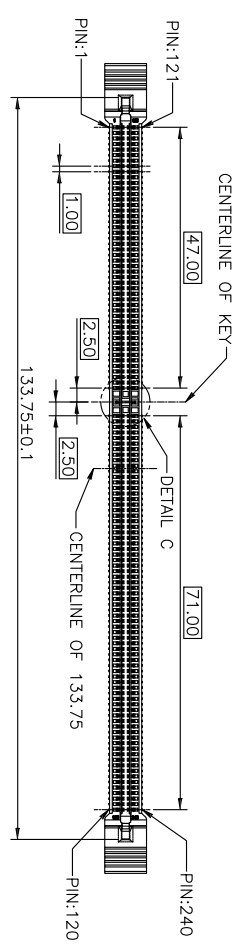

**SPECIFICATIONS:**

**Material:**  
 Housing: Hi-temp thermoplastic, rated UL 94V-0, color Black  
 Extractor: Hi-temp thermoplastic, rated UL 94V-0, color Black  
 Contacts: Copper Alloy  
 Hook: Copper Alloy  
**Plating:**  
 Gold Flash over Nickel on contact area,  
 Tin over Nickel underplate on tails.

**Electrical:**  
 Operating voltage: 250 VAC max  
 Current rating: 0.5 Amps max  
 Contact resistance: 30 mohms max  
 Insulation resistance: 1000 Mohms min  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
**Temperature Rating:**  
 Operating temperature: -55°C to +105°C  
**Environmental:**  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MM  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLES  
 .X ±.10 ØX ±.10  
 .XX ±.020 ØXX ±.015  
 .XXX ±.015 ØXXX ±.010

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE	TITLE
DRAWN	DY	4/29/10
CHECKED		
APPROVED		

SIZE	PART NO.	SCALE	SHEET	REV.
X	DDR-240-V-4-SMT	MKS	1 OF 2	-