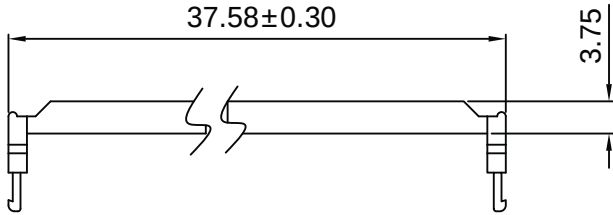

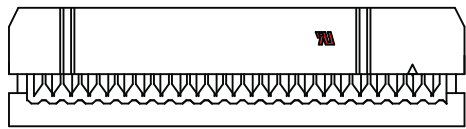
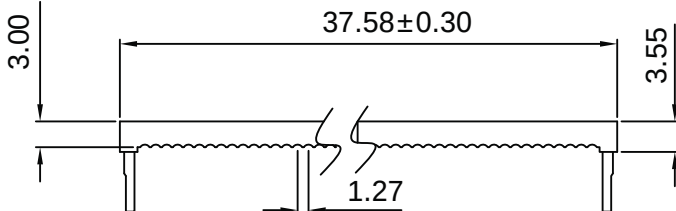

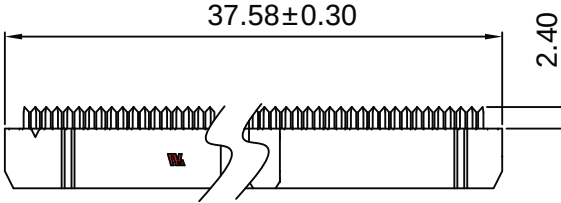

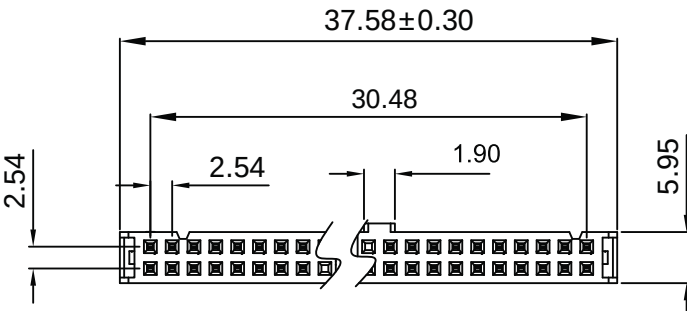


	1	2	3	4	5	6	7																																																																																				
A								A																																																																																			
B								B																																																																																			
C								C																																																																																			
D						Material: - Insulator: P.B.T. 30% Glass Fiber, UL 94V-0 - Contact Material: Phosphor Bronze, Tin plated over Nickel Electrical: - Current Rating: 1Amp - Insulation Resistance: 1,000MΩ Min. - Contact Resistance: 30MΩ Max. - Dielectric Withstanding: 500V AC - Operating Temperature: -40°C ~ +85°C		D																																																																																			
E								E																																																																																			
F								F																																																																																			
G	Unit: mm RoHS Compliant			<table><tr><td>Scale</td><td>1:1</td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td>Title</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td>Drawn</td><td>19.10.11</td><td>Chappell</td></tr><tr><td>X.X</td><td>±0.40</td><td></td><td></td><td></td><td></td><td>Approved</td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.25</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.XXX</td><td>±0.15</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.°</td><td>±3°</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.X°</td><td>±X°</td><td>①</td><td>Updated part number</td><td>09.08.13</td><td>Wilson</td><td colspan="2" rowspan="2"> ASSMANN WSW components 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us </td><td> IDC Socket - 26 contact Tin, 2.54mm pitch, w/central polarisation, w/strain relief ASSMANN WSW-No. AWP26-7541-T</td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td>Drawing-No.</td><td>rev00</td></tr></table>			Scale	1:1					Date	Name	Title	TOLERANCE						Drawn	19.10.11	Chappell	X.X	±0.40					Approved			X.XX	±0.25								X.XXX	±0.15								DIM	TOL								X.°	±3°								X.X°	±X°	①	Updated part number	09.08.13	Wilson	ASSMANN WSW components 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us		IDC Socket - 26 contact Tin, 2.54mm pitch, w/central polarisation, w/strain relief ASSMANN WSW-No. AWP26-7541-T	Angle	TOL	Id.	Modification	Date	Name	Drawing-No.	rev00					G
Scale	1:1					Date	Name	Title																																																																																			
TOLERANCE						Drawn	19.10.11	Chappell																																																																																			
X.X	±0.40					Approved																																																																																					
X.XX	±0.25																																																																																										
X.XXX	±0.15																																																																																										
DIM	TOL																																																																																										
X.°	±3°																																																																																										
X.X°	±X°	①	Updated part number	09.08.13	Wilson	ASSMANN WSW components 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us		IDC Socket - 26 contact Tin, 2.54mm pitch, w/central polarisation, w/strain relief ASSMANN WSW-No. AWP26-7541-T																																																																																			
Angle	TOL	Id.	Modification	Date	Name			Drawing-No.	rev00																																																																																		
H								Replace Sheet 1/1	H																																																																																		
	1	2	3	4	5	6	7																																																																																				