



Converter - Brake - Inverter Module

XPT IGBT

| Three Phase Rectifier | Brake Chopper | Three Phase Inverter |
|----------------------------|-------------------------------|-------------------------------|
| $V_{RRM} = 1600 \text{ V}$ | $V_{CES} = 1200 \text{ V}$ | $V_{CES} = 1200 \text{ V}$ |
| $I_{DAVM} = 105 \text{ A}$ | $I_{C25} = 28 \text{ A}$ | $I_{C25} = 60 \text{ A}$ |
| $I_{FSM} = 320 \text{ A}$ | $V_{CE(sat)} = 1.8 \text{ V}$ | $V_{CE(sat)} = 1.8 \text{ V}$ |

Part name (Marking on product)

MIXA40WB1200TED

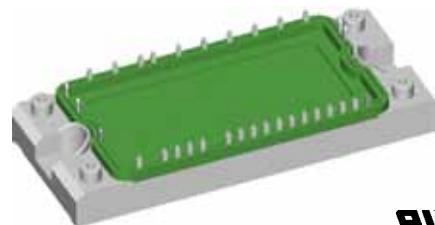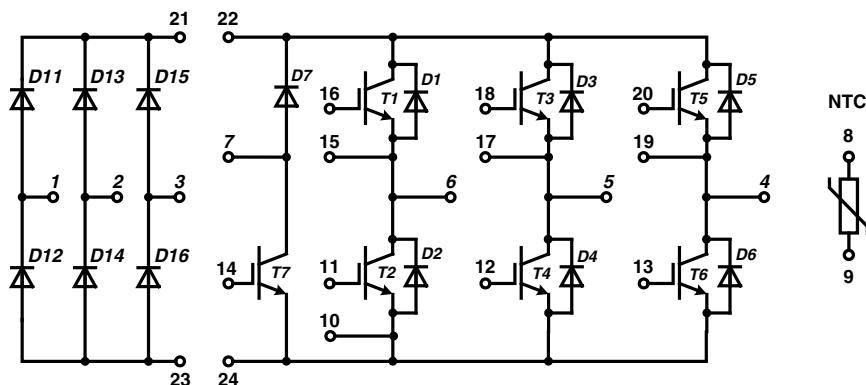

E 72873

Pin configuration see outlines.

Features:

- Easy paralleling due to the positive temperature coefficient of the on-state voltage
- Rugged XPT design
(Xtreme light Punch Through) results in:
 - short circuit rated for 10 μsec .
 - very low gate charge
 - square RBSOA @ $3x I_C$
 - low EMI
- Thin wafer technology combined with the XPT design results in a competitive low $V_{CE(sat)}$
- SONIC™ diode
 - fast and soft reverse recovery
 - low operating forward voltage

Application:

- AC motor drives
- Solar inverter
- Medical equipment
- Uninterruptible power supply
- Air-conditioning systems
- Welding equipment
- Switched-mode and resonant-mode power supplies

Package:

- "E2-Pack" standard outline
- Insulated copper base plate
- Soldering pins for PCB mounting
- Temperature sense included

Output Inverter T1 - T6

Ratings

| Symbol | Definitions | Conditions | min. | typ. | max. | Unit |
|---------------|---------------------------------------|--|---|------------|------------|----------|
| V_{CES} | collector emitter voltage | $T_{VJ} = 25^\circ C$ | | 1200 | | V |
| V_{GES} | max. DC gate voltage | continuous | | ± 20 | | V |
| V_{GEM} | max. transient collector gate voltage | transient | | ± 30 | | V |
| I_{C25} | collector current | $T_C = 25^\circ C$ | 60 | | A | |
| I_{C80} | | $T_C = 80^\circ C$ | 40 | | A | |
| P_{tot} | total power dissipation | $T_C = 25^\circ C$ | | 195 | | W |
| $V_{CE(sat)}$ | collector emitter saturation voltage | $I_C = 35 A; V_{GE} = 15 V$ | $T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$ | 1.8 2.1 | 2.1 | V |
| $V_{GE(th)}$ | gate emitter threshold voltage | $I_C = 1.5 mA; V_{GE} = V_{CE}$ | $T_{VJ} = 25^\circ C$ | 5.4 | 6.0 | V |
| I_{CES} | collector emitter leakage current | $V_{CE} = V_{CES}; V_{GE} = 0 V$ | $T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$ | | 2.1 0.2 | mA mA |
| I_{GES} | gate emitter leakage current | $V_{GE} = \pm 20 V$ | | | 500 | nA |
| $Q_{G(on)}$ | total gate charge | $V_{CE} = 600 V; V_{GE} = 15 V; I_C = 35 A$ | | 106 | | nC |
| $t_{d(on)}$ | turn-on delay time | $T_{VJ} = 125^\circ C$ $V_{CE} = 600 V; I_C = 35 A$ $V_{GE} = \pm 15 V; R_G = 27 \Omega$ | 70 | | | ns |
| t_r | current rise time | | 40 | | | ns |
| $t_{d(off)}$ | turn-off delay time | | 250 | | | ns |
| t_f | current fall time | | 100 | | | ns |
| E_{on} | turn-on energy per pulse | | 3.8 | | | mJ |
| E_{off} | turn-off energy per pulse | | 4.1 | | | mJ |
| RBSOA | reverse bias safe operating area | $V_{GE} = \pm 15 V; R_G = 27 \Omega;$ $V_{CEK} = 1200 V$ | | | 105 | A |
| SCSOA | short circuit safe operating area | | | | | |
| t_{sc} | short circuit duration | $V_{CE} = 900 V; V_{GE} = \pm 15 V;$ | $T_{VJ} = 125^\circ C$ | | 10 | μs |
| I_{sc} | short circuit current | $R_G = 27 \Omega$; non-repetitive | | 140 | | A |
| R_{thJC} | thermal resistance junction to case | (per IGBT) | | | 0.64 | K/W |

Output Inverter D1 - D6

Ratings

| Symbol | Definitions | Conditions | min. | typ. | max. | Unit |
|------------|-------------------------------------|---|---|--------------|------|---------|
| V_{RRM} | max. repetitive reverse voltage | $T_{VJ} = 25^\circ C$ | | 1200 | | V |
| I_{F25} | forward current | $T_C = 25^\circ C$ | | 44 | | A |
| I_{F80} | | $T_C = 80^\circ C$ | | 29 | | A |
| V_F | forward voltage | $I_F = 30 A; V_{GE} = 0 V$ | $T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$ | 1.95 1.95 | 2.2 | V |
| Q_{rr} | reverse recovery charge | $T_{VJ} = 125^\circ C$ $V_R = 600 V$ $di_F/dt = -600 A/\mu s$ $I_F = 30 A; V_{GE} = 0 V$ | 3.5 | | | μC |
| I_{RM} | max. reverse recovery current | | 30 | | | A |
| t_{rr} | reverse recovery time | | 350 | | | ns |
| E_{rec} | reverse recovery energy | | 0.9 | | | mJ |
| R_{thJC} | thermal resistance junction to case | (per diode) | | | 1.2 | K/W |

 $T_C = 25^\circ C$ unless otherwise stated

Brake T7

Ratings

| Symbol | Definitions | Conditions | min. | typ. | max. | Unit |
|---------------|---------------------------------------|---|---|------------|------|---------|
| V_{CES} | collector emitter voltage | $T_{VJ} = 25^\circ C$ | | 1200 | | V |
| V_{GES} | max. DC gate voltage | continuous | | ± 20 | | V |
| V_{GEM} | max. transient collector gate voltage | transient | | ± 30 | | V |
| I_{C25} | collector current | $T_C = 25^\circ C$ | 28 | | A | |
| I_{C80} | | $T_C = 80^\circ C$ | 20 | | A | |
| P_{tot} | total power dissipation | $T_C = 25^\circ C$ | 100 | | W | |
| $V_{CE(sat)}$ | collector emitter saturation voltage | $I_C = 16 A; V_{GE} = 15 V$ | $T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$ | 1.8 2.1 | 2.1 | V |
| $V_{GE(th)}$ | gate emitter threshold voltage | $I_C = 0.6 mA; V_{GE} = V_{CE}$ | $T_{VJ} = 25^\circ C$ | 5.4 | 6.0 | V |
| I_{CES} | collector emitter leakage current | $V_{CE} = V_{CES}; V_{GE} = 0 V$ | $T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$ | | 0.1 | mA |
| I_{GES} | gate emitter leakage current | $V_{GE} = \pm 20 V$ | | | 500 | nA |
| $Q_{G(on)}$ | total gate charge | $V_{CE} = 600 V; V_{GE} = 15 V; I_C = 15 A$ | 48 | | nC | |
| $t_{d(on)}$ | turn-on delay time |  | 70 | | | ns |
| t_r | current rise time | | 40 | | | ns |
| $t_{d(off)}$ | turn-off delay time | | 250 | | | ns |
| t_f | current fall time | | 100 | | | ns |
| E_{on} | turn-on energy per pulse | | 1.6 | | | mJ |
| E_{off} | turn-off energy per pulse | | 1.7 | | | mJ |
| RBSOA | reverse bias safe operating area | $V_{GE} = \pm 15 V; R_G = 56 \Omega;$ $V_{CEK} = 1200 V$ | | 45 | | A |
| SCSOA | short circuit safe operating area | | | | | |
| t_{sc} | short circuit duration | $V_{CE} = 900 V; V_{GE} = \pm 15 V;$ $R_G = 56 \Omega$; non-repetitive | $T_{VJ} = 125^\circ C$ | 10 | | μs |
| I_{sc} | short circuit current | | | 60 | | A |
| R_{thJC} | thermal resistance junction to case | (per IGBT) | | | 1.26 | K/W |

Brake Chopper D7

Ratings

| Symbol | Definitions | Conditions | min. | typ. | max. | Unit |
|------------|-------------------------------------|---|---|------------|------|---------|
| V_{RRM} | max. repetitive reverse voltage | $T_{VJ} = 25^\circ C$ | | 1200 | | V |
| I_{F25} | forward current | $T_C = 25^\circ C$ | | 12 | | A |
| I_{F80} | | $T_C = 80^\circ C$ | | 8 | | A |
| V_F | forward voltage | $I_F = 10 A; V_{GE} = 0 V$ | $T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$ | 2.5 2.6 | 2.9 | V |
| I_R | reverse current | $V_R = V_{RRM}$ | $T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$ | 0.5 | 0.5 | mA |
| Q_{rr} | reverse recovery charge |  | $V_R = 600 V$ $di_F/dt = 200 A/\mu s$ $I_F = 5 A; V_{GE} = 0 V$ | 0.6 | | μC |
| I_{RM} | max. reverse recovery current | | | 6 | | A |
| t_{rr} | reverse recovery time | | | 350 | | ns |
| E_{rec} | reverse recovery energy | | | 0.2 | | mJ |
| R_{thJC} | thermal resistance junction to case | (per diode) | | | 3.4 | K/W |

 $T_C = 25^\circ C$ unless otherwise stated

Input Rectifier Bridge D11 - D16


| Ratings | | | | | | |
|----------------|-------------------------------------|---|---|--------------|-------------|--------------------------------------|
| Symbol | Definitions | Conditions | min. | typ. | max. | Unit |
| V_{RRM} | max. repetitive reverse voltage | | $T_{VJ} = 25^\circ\text{C}$ | | 1600 | V |
| I_{FAV} | average forward current | sine 180° | $T_C = 80^\circ\text{C}$ | | 37 | A |
| I_{DAVM} | max. average DC output current | rect.; $d = 1/3$ | $T_C = 80^\circ\text{C}$ | | 105 | A |
| I_{FSM} | max. forward surge current | $t = 10 \text{ ms}; \text{sine } 50 \text{ Hz}$ | $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$ | | 320 280 | A A |
| I^2t | I^2t value for fusing | $t = 10 \text{ ms}; \text{sine } 50 \text{ Hz}$ | $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$ | | 510 390 | A ² s A ² s |
| P_{tot} | total power dissipation | | $T_C = 25^\circ\text{C}$ | | 114 | W |
| V_F | forward voltage | $I_F = 50 \text{ A}$ | $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$ | 1.34 1.34 | 1.7 | V V |
| I_R | reverse current | $V_R = V_{RRM}$ | $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$ | 0.2 | 0.02 | mA mA |
| R_{thJC} | thermal resistance junction to case | (per diode) | | | 1.1 | K/W |

Temperature Sensor NTC

| Ratings | | | | | | |
|----------------|--------------------|-------------------|--------------------------|-------------|-------------|-------------|
| Symbol | Definitions | Conditions | min. | typ. | max. | Unit |
| R_{25} | resistance | | $T_C = 25^\circ\text{C}$ | 4.75 | 5.0 | kΩ |
| $B_{25/50}$ | | | | | 3375 | K |

Module


| Ratings | | | | | | |
|----------------|-------------------------------------|--|-------------|-------------|-------------|-------------|
| Symbol | Definitions | Conditions | min. | typ. | max. | Unit |
| T_{VJ} | operating temperature | | -40 | | 125 | °C |
| T_{VJM} | max. virtual junction temperature | | | | 150 | °C |
| T_{stg} | storage temperature | | -40 | | 125 | °C |
| V_{ISOL} | isolation voltage | $I_{ISOL} \leq 1 \text{ mA}; 50/60 \text{ Hz}$ | | | 2500 | V~ |
| CTI | comparative tracking index | | | | - | |
| M_d | mounting torque (M5) | | 3 | | 6 | Nm |
| d_s | creep distance on surface | | 6 | | | mm |
| d_A | strike distance through air | | 6 | | | mm |
| $R_{pin-chip}$ | resistance pin to chip | | | | 5 | mΩ |
| R_{thCH} | thermal resistance case to heatsink | with heatsink compound | | 0.02 | | K/W |
| Weight | | | | | 180 | g |

Equivalent Circuits for Simulation

| Ratings | | | | | | |
|----------------|---------------------|-------------------|------------------------------|-------------|-------------|-------------|
| Symbol | Definitions | Conditions | min. | typ. | max. | Unit |
| V_0 | rectifier diode | D8 - D13 | $T_{VJ} = 150^\circ\text{C}$ | | 0.88 | V |
| R_0 | | | | | 9 | mΩ |
| V_0 | IGBT | T1 - T6 | $T_{VJ} = 150^\circ\text{C}$ | | 1.1 | V |
| R_0 | | | | | 40 | mΩ |
| V_0 | free wheeling diode | D1 - D6 | $T_{VJ} = 150^\circ\text{C}$ | | 1.2 | V |
| R_0 | | | | | 27 | mΩ |
| V_0 | IGBT | T7 | $T_{VJ} = 150^\circ\text{C}$ | | 1.1 | V |
| R_0 | | | | | 86 | mΩ |
| V_0 | free wheeling diode | D7 | $T_{VJ} = 150^\circ\text{C}$ | | 1.15 | V |
| R_0 | | | | | 170 | mΩ |


$T_C = 25^\circ\text{C}$ unless otherwise stated

Circuit Diagram

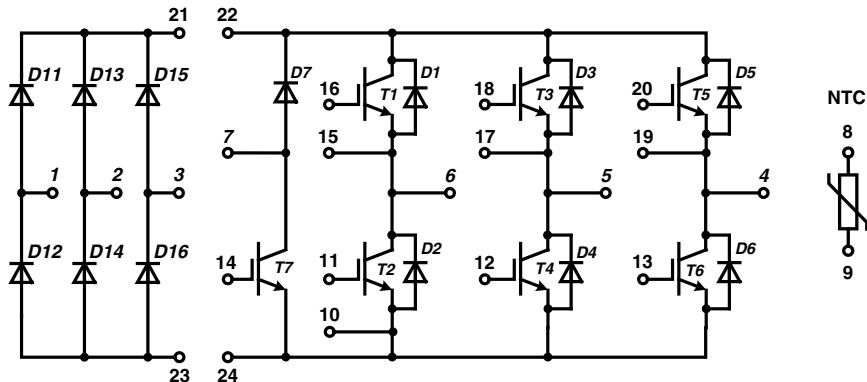


Outline Drawing

Dimensions in mm (1 mm = 0.0394")

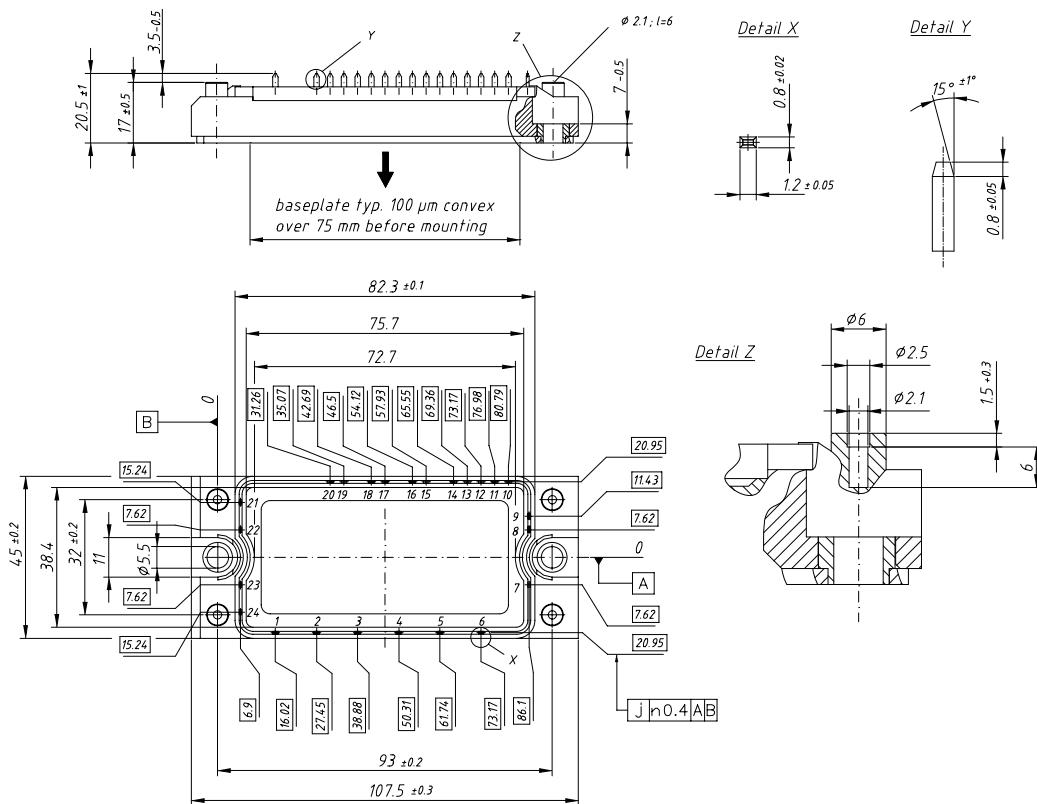

Product Marking

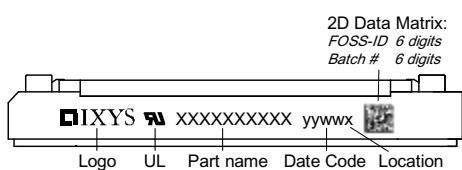

2D Data Matrix:
FOSS-ID 6 digits
Batch # 6 digits

Part number

M = Module
I = IGBT
X = XPT
A = Standard
40 = Current Rating [A]
WB = 6-Pack + 3~ Rectifier Bridge & Brake Unit
1200 = Reverse Voltage [V]
T = NTC
ED = E2-Pack

| Ordering | Part Name | Marking on Product | Delivering Mode | Base Qty | Ordering Code |
|----------|------------------|--------------------|-----------------|----------|---------------|
| Standard | MIXA40WB1200 TED | MIXA40WB1200TED | Box | 6 | 507497 |

IXYS reserves the right to change limits, test conditions and dimensions.

20110916e

Inverter T1 - T6

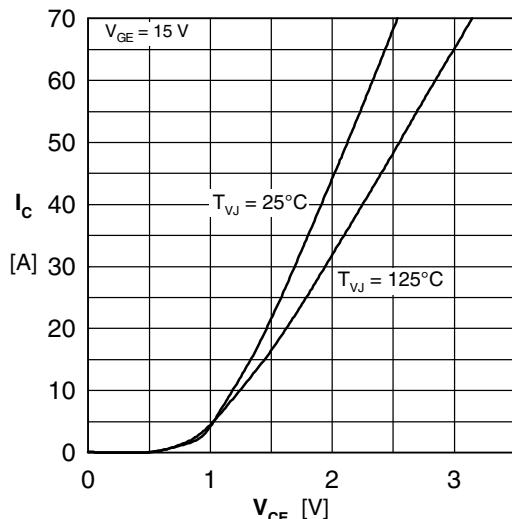


Fig. 1 Typ. output characteristics

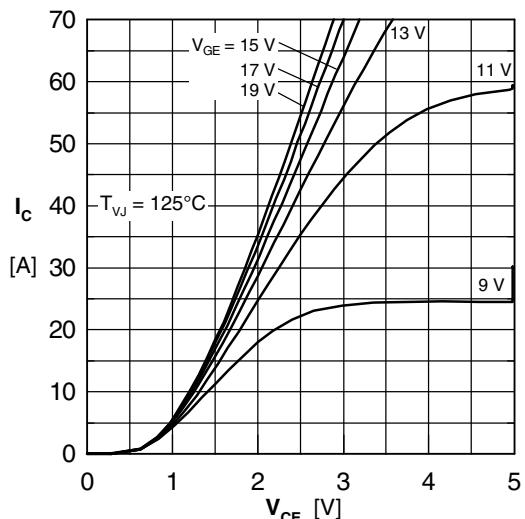


Fig. 2 Typ. output characteristics

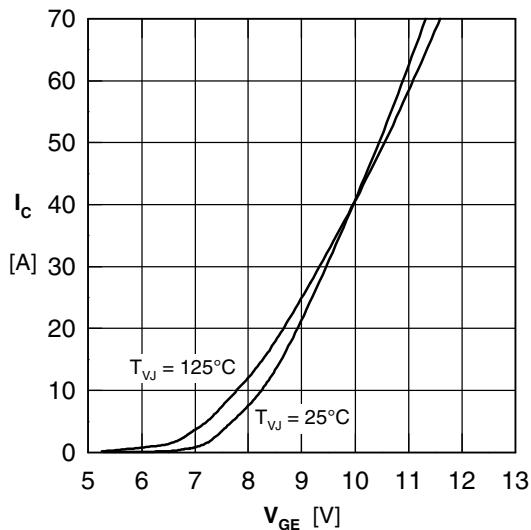


Fig. 3 Typ. transfer characteristics

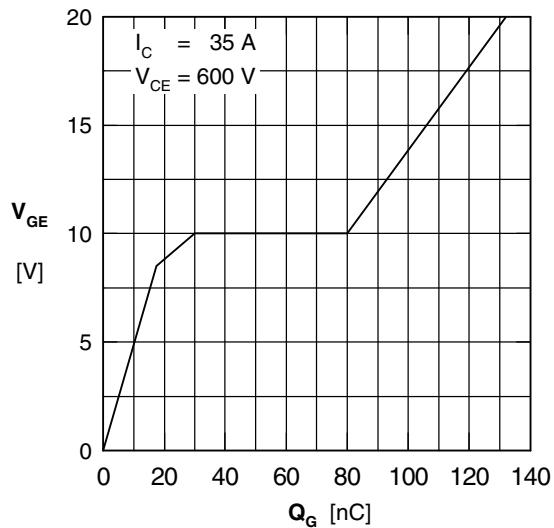


Fig. 4 Typ. turn-on gate charge

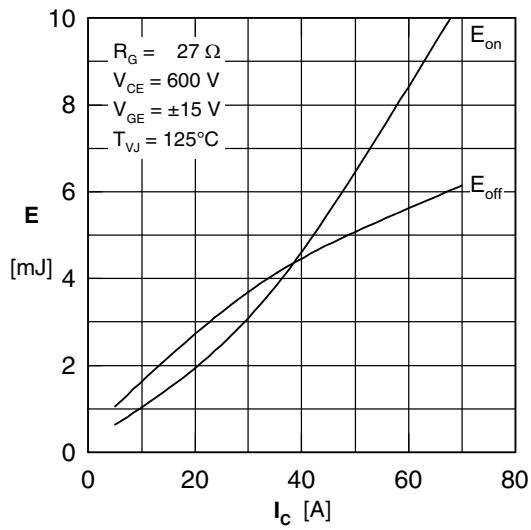


Fig. 5 Typ. switching energy vs. collector current

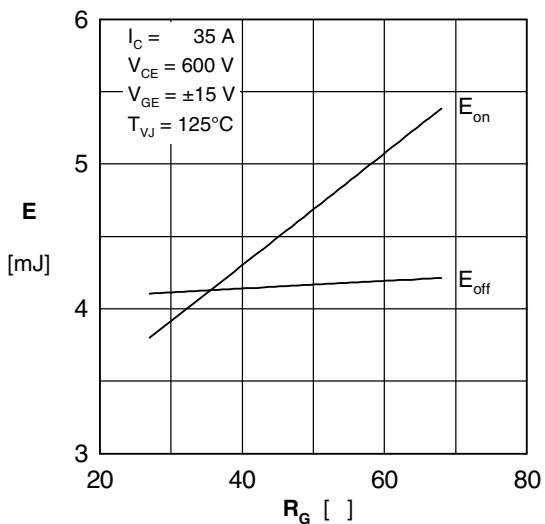


Fig. 6 Typ. switching energy vs. gate resistance

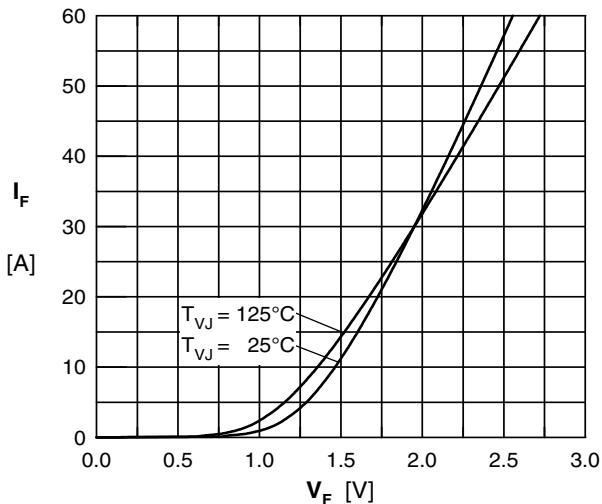
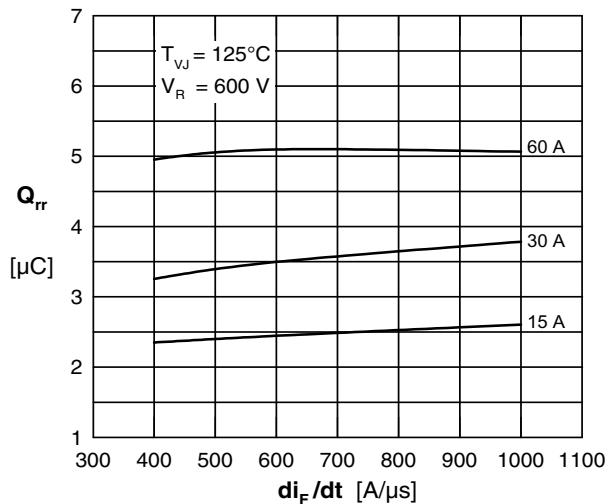
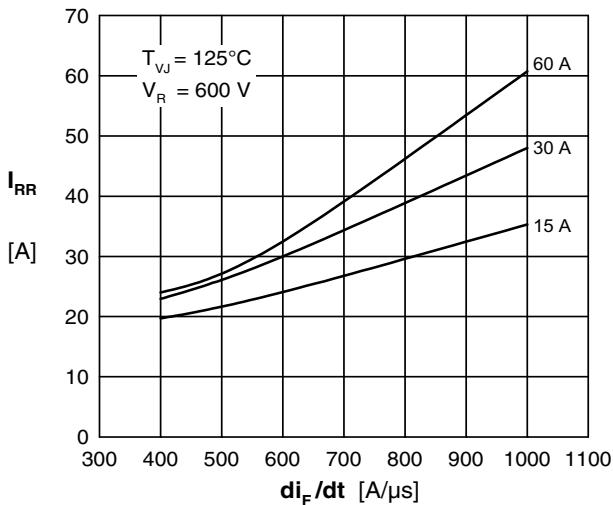
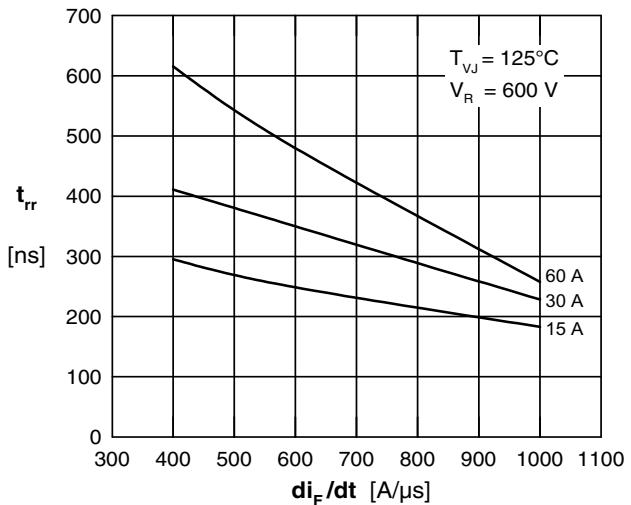
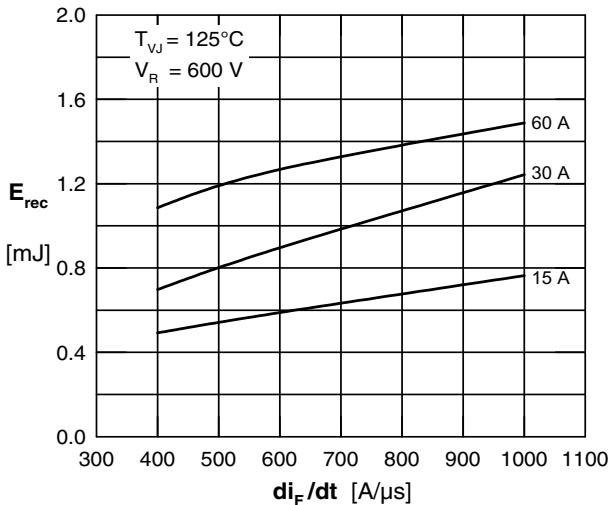
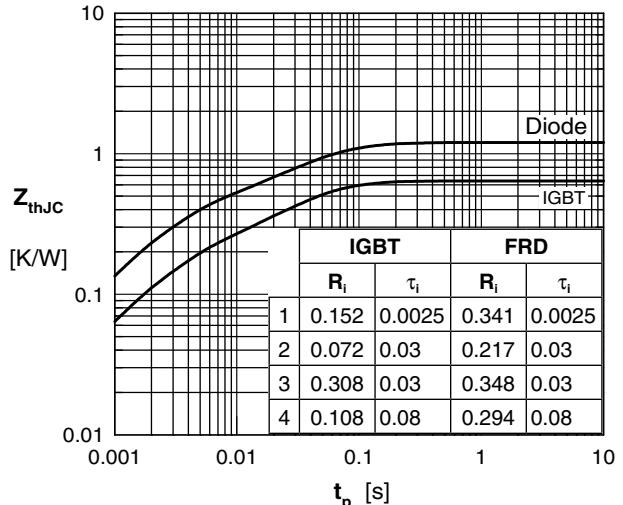
Inverter D1 - D6

 Fig. 7 Typ. Forward current versus V_F

 Fig. 8 Typ. reverse recov.charge Q_{rr} vs. di/dt

 Fig. 9 Typ. peak reverse current I_{RR} vs. di/dt

 Fig. 10 Typ. recovery time t_{rr} versus di/dt

 Fig. 5 Typ. recovery energy E_{rec} versus di/dt


Fig. 12 Typ. transient thermal impedance

Brake T7 & D7

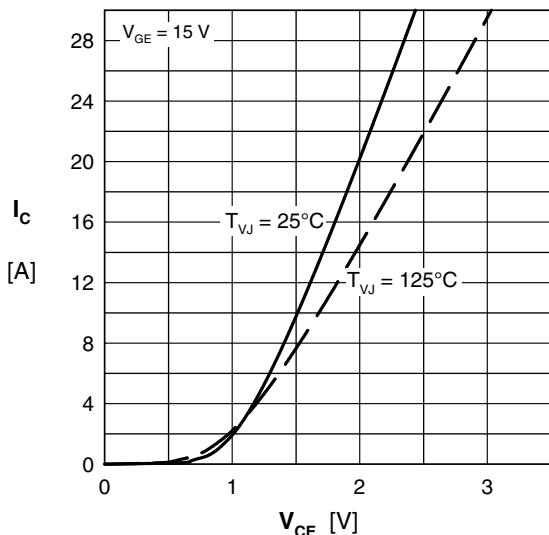


Fig. 13 Typ. output characteristics

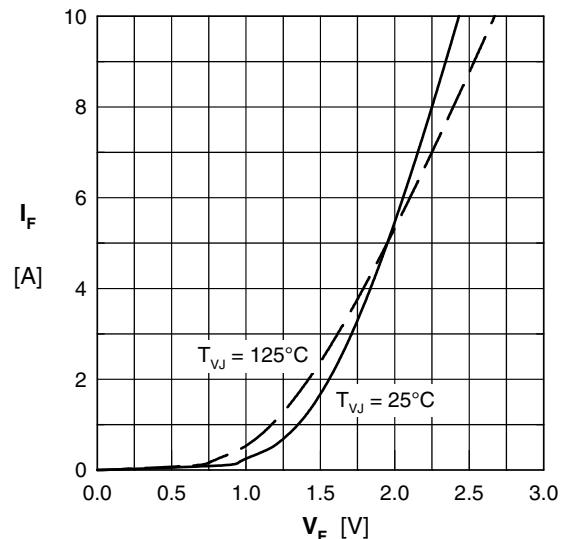


Fig. 14 Typ. forward characteristics

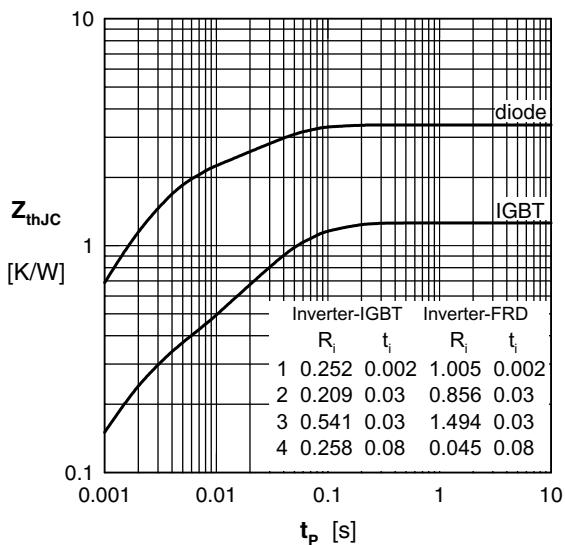


Fig. 15 Typ. transient thermal impedance

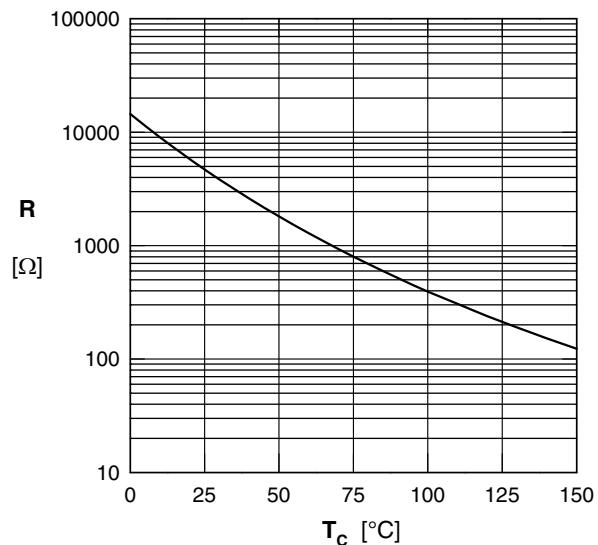


Fig. 16 Typ. NTC resistance vs. temperature