



1. Mechanical Dimensions:

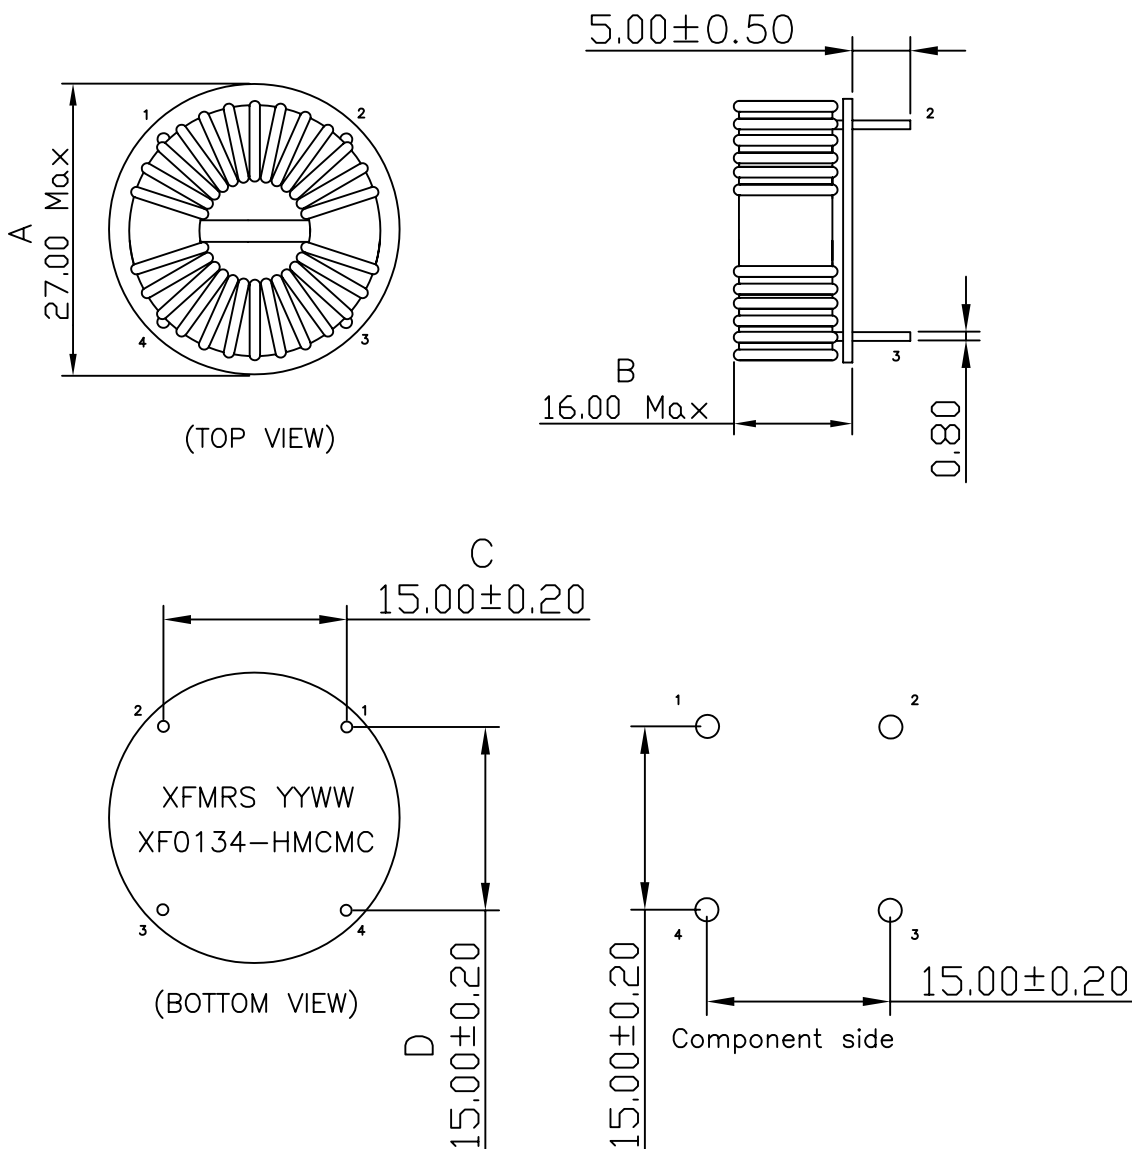

2. Schematic:

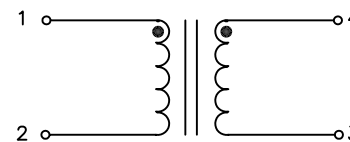

3. Electrical Specifications: @25°C

OCL: 1.30mH Min @10KHz 0.1V Each Wdg

Q: 5 Min @10KHz 0.1V Each Wdg

I rms Amperes: 4.0A Max

DCR: 0.032 Ohms Max, Each Wdg

HIPOT: 500Vac, Wdg to Wdg

Notes:


- Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Class F 155°C. UL file E151556
- Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
- Storage Temperature Range: -55°C to +125°C
- Aqueous wash compatible
- Electrical and mechanical specifications 100% tested
- RoHS Compliant Component

DOC. REV: A/5

XFMR5 Inc. www.XFMR5.com	Title: Common Mode Inductors (Through-Hole)		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N:XF0134-HMCMC		REV. A
	DWN.	Feng	Jun-07-11
	CHK.	YK Liao	Jun-07-11
SHEET 1 OF 2	APP.	BW	Jun-07-11

PROPRIETARY

Document is the property of XFMR5 Group & is not allowed to be duplicated without authorization.

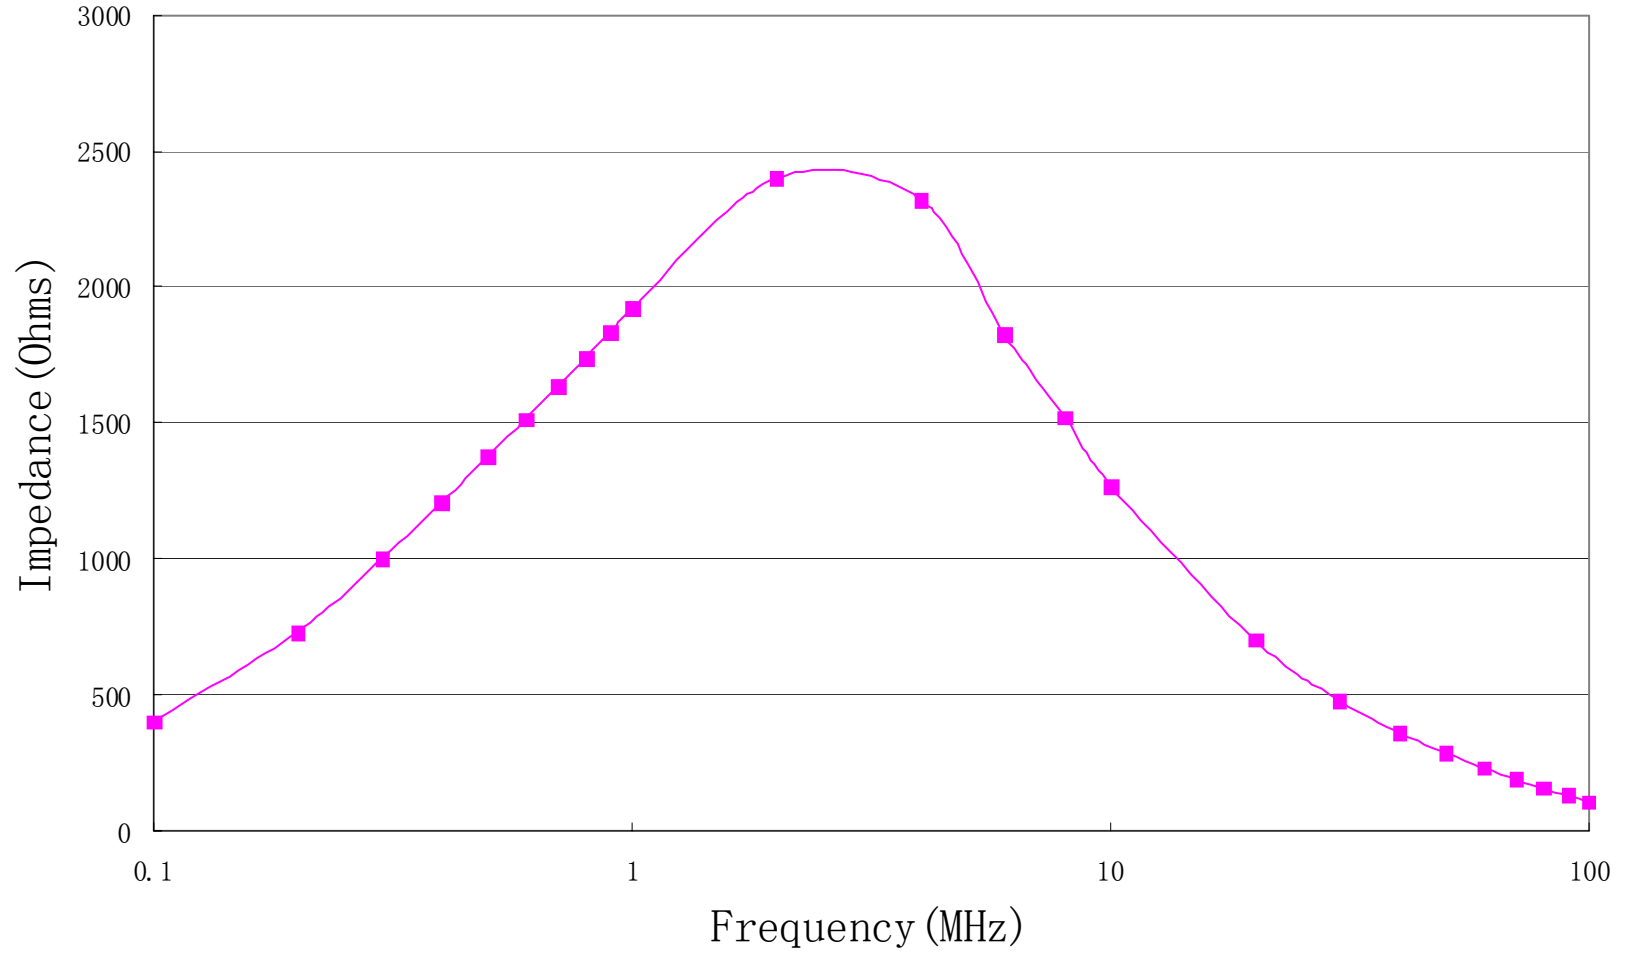

DOC. REV: A/5

XFMRs Inc. www.XFMRS.com	Title: Common Mode Inductors (Through-Hole)		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM		P/N:XF0134-HMCMC REV. A
SHEET 2 OF 2	DWN.	Feng	Jun-07-11
	CHK.	YK Liao	Jun-07-11
	APP.	BW	Jun-07-11

PROPRIETARY Document is the property of XFMRs Group & is not allowed to be duplicated without authorization.