

4850, 4-pole, Socket, PCB terminals, DIN Plug/Socket



Description


- PCB Mounting
- DIN Plug: 4-pole , straight

Technical Data

| | |
|-----------------------|--------------------------------|
| Diameter | 9.0 mm |
| Number of Poles | 4-pole |
| Ratings DC | 2 A / 12 VDC |
| Ratings AC | 1 A / 100 VAC |
| Dielectric Strength | 250 VAC |
| Insulation Resistance | > 50 MΩ @ 250 VDC |
| Material: Housing | Thermoplastic, black, UL 94V-0 |

| | |
|---------------------------|-----------------------------|
| Allowable Operation Temp. | -20 °C to 70 °C |
| Terminal | PCB terminals silver plated |
| Lifetime | 5000 Insertions |

Dimensions

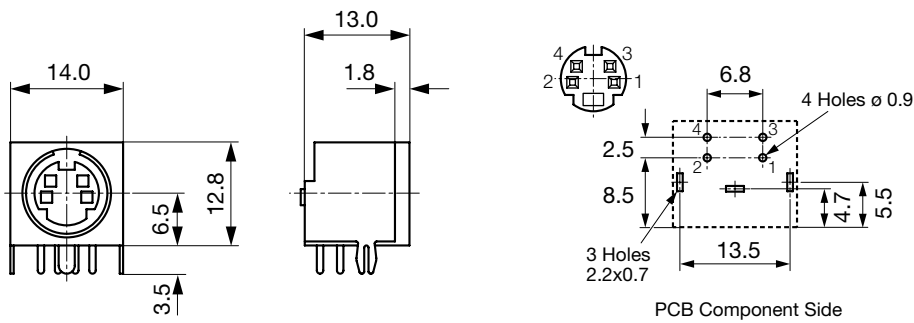

All Variants

| Product group | Diameter [mm] | Number of Poles | Terminal | Order Number |
|-----------------|---------------|-----------------|---------------|--------------|
| DIN Plug/Socket | 9.0 | 4-pole | PCB terminals | 4850.2410 |

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 750 Pcs

Mating Inlets/Plugs

Category / Description



[DIN Plug/Socket Overview complete](#)

4850, 4-pole, Plug, solder terminal, DIN Plug/Socket

4850.1410

[DIN Plug/Socket further types to 4850.2410](#)