

## ADN-C Series 3-Phase

120-960 Watts

### Data Sheet

**Total Power:** 120-960 Watts  
**Input Voltage:** 380-480 Vac  
**# Outputs:** Single

### SPECIAL FEATURES

- Slim form factor
- Five year warranty
- High efficiency up to 94%
- Full power at 60 °C
- Power Boost™
- Industrial grade design
  - Metal case
- MTBF > 500,000h
- Adjustable output
- Overvoltage protection with auto recovery
- Continuous short circuit and overload protection
- New visual diagnostic LED
- Three Status LEDs
  - Input
  - Output
  - Alarm
- DC OK relay
- Parallel operation capability
- Screw terminal connections
- RoHS compliant
- No tools required for mounting

### SAFETY

- UL508, cULus Listed
- UL 60950-1, cURus 2<sup>nd</sup> edition
- IEC60950-1 2<sup>nd</sup> edition
- Class I, Div 2 Hazardous Locations
- IP20
- CE



### Electrical Specifications

Input	
Nominal voltage	380 - 480 Vac
AC input range	320 - 540 Vac
DC input range	450 - 760 Vdc for ADN5, ADN10 & ADN20
Frequency	50 - 60 Hz
Efficiency	Up to 94%
PFC	Active power factor correction for ADN20 & ADN40; meet EN61000-3-2 Class A
Phase input	ADN5 and ADN10 will operate with single phase input at 100% load Derate to 75% and 50% for ADN20 and ADN40 respectively under loss of 1 phase; Units will shut down if thermal threshold is exceeded under this condition
Output	
Nominal voltage	24 V (24.0 - 28.0 Vdc Adj.)
Hold-up time	> 20 ms for ADN5, ADN10 & ADN20; > 15 ms for ADN40
Voltage regulation	< ± 2% overall
Ripple	< 100 mVpp
Current limit	PowerBoost™
Peak current	2x nominal current for < 2 sec for ADN5 & ADN10; 1.5x nominal current for 4 seconds minimum while holding voltage > 20 Vdc for ADN20 & ADN40
Parallel operation	Single or parallel operation selectable via front switch. For redundant operation use of external diode module is preferred; ADN40 uses active paralleling
Power back immunity	< 35 V
Overvoltage protection	> 30.5 Vdc, but < 33 Vdc, auto recovery

### General Specifications

<b>EMC emissions</b>	EN61000-6-3:2001, Class B EN55011, EN55022 Radiated and Conducted including Annex. A, EN61000-3-2
<b>EMC immunity</b>	EN61000-6-1:2001, EN61000-6-2:2001, EN61000-4-2 Level 4, EN61000-4-3 Level 3, EN61000-4-6 Level 3, EN61000-4-4 Level 4 input and level 3 output. EN61000-4-5 Isolation class 4, EN61000-4-11, Semi F47 sag immunity
<b>Warranty</b>	5 Years
<b>General protection safety</b>	Protected against continuous short-circuit, overload, open-circuit. Protection Class 1 (IEC536), degree of protection IP20 (IEC 60529) Safe low voltage: SELV (acc. EN60950)
<b>Status indicators</b>	Visual: 3 status LEDs (Input, Output, Alarm) Relay: SSR or dry relay contact, signal active when $V_{out} = 18.5 \text{ vdc} + 5\%$

### LED Diagnostics

LED	OK	Loss of Ac	Low Ac	No Dc	High Load	Overload	Hot	Too Hot
<b>Input</b>	Green	---	Yellow	Green	Green	Green	Green	Green
<b>Output</b>	Green	---	Green	---	Yellow	Yellow	Green	---
<b>Alarm</b>	---	---	---	Red	Yellow	Red	Yellow	Yellow

### Environmental Specifications

<b>Storage/shipment</b>	-40 °C to + 85 °C
<b>Operation (convection)</b>	Full Load -25 °C to + 60 °C derate to 50% load at +70 °C Up to 50% load permissible with horizontal or on top mounting orientation
<b>Humidity</b>	< 90% RH, non-condensing IEC 60068-2-2, 68-2-3

### Other Features

<b>Fusing</b>	Input externally fused; output not fused, output is capable of providing high currents (PowerBoost) for motor load startup
<b>Mounting orientation</b>	Standard: Vertical, Optional: Horizontal or on Top Simple snap-on to DIN TS35/7.5 or TS35/15 rail system
<b>Ventilation</b>	Normal convection, No fan required
<b>Cooling spacing</b>	ADN5: 15 mm in front, 25 mm above and below ADN10: 15 mm in front, 25 mm above and below ADN20: 25 mm in front, left and right; 70 mm above and below ADN40: 15 mm in front, 70 mm above and below, 25 mm left and right
<b>Connections</b>	Input: Screw terminals, connector size range: 16-10 AWG (1.5-6 mm <sup>2</sup> ) for solid conductors Output: Connector size range: 16-10 AWG (1.5-6 mm <sup>2</sup> ) for ADN5, ADN10 and ADN20 solid conductors; 6-7 AWG for ADN40


### Ordering Information

Model Number	Power	Input Voltage	Weight	Current	Efficiency	Case Type	MTBF
ADN5-24-3PM-C	120 W	320 - 540 Vac 450 - 760 Vdc	1.15 lbs (520 g)	5 A @ 24 Vdc	85.0%	Metal	> 500,000 hours Nominal voltage, full load, Tamb=25 °C
ADN10-24-3PM-C	240 W		1.54 lbs (700 g)	10 A @ 24 Vdc	91.2%		
ADN20-24-3PM-C	480 W		2.8 lbs (1300 g)	20 A @ 24 Vdc	93.0%		
ADN40-24-3PM-C	960 W	320 - 540 Vac	5.3 lbs (2400 g)	40 A @ 24 Vdc	94.0%		

### Dimensions

	Height	Width	Depth
ADN5-24-3PM-C	4.85 in (123 mm)	1.97 in (50 mm)	4.36 (111 mm)
ADN10-24-3PM-C	4.85 in (123 mm)	2.36 in (60 mm)	4.36 (111 mm)
ADN20-24-3PM-C	4.85 in (123 mm)	3.34 in (85 mm)	4.68 (119 mm)
ADN40-24-3PM-C	4.85 in (123 mm)	7.09 in (180 mm)	4.85 in (123 mm)

### Mechanical Drawing

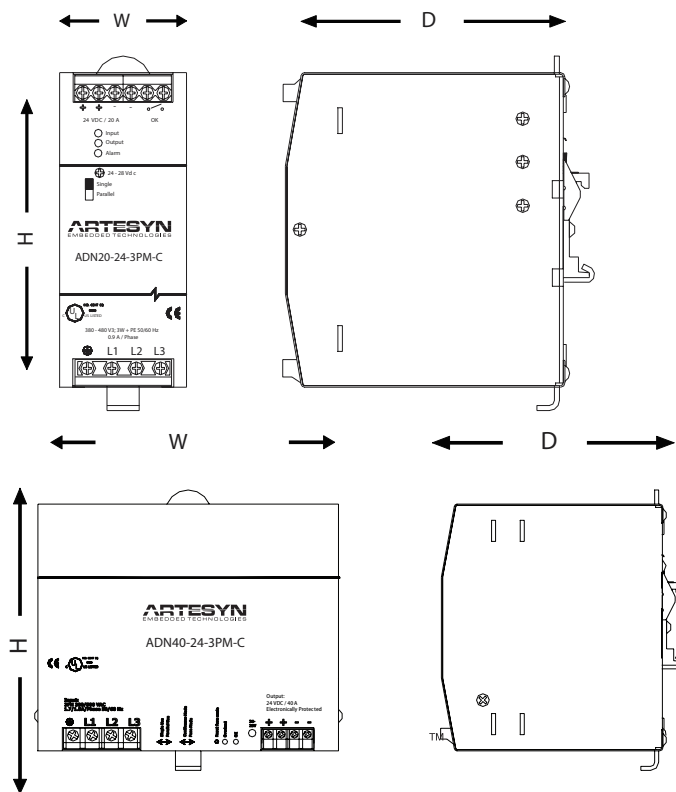

### WORLDWIDE OFFICES

#### Americas

2900 S.Diablo Way  
Tempe, AZ 85282  
USA  
+1 888 412 7832

#### Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
+44 (0) 1384 842 211

#### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333



[www.artesyn.com](http://www.artesyn.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners.  
© 2015 Artesyn Embedded Technologies, Inc.

For more information: [www.artesyn.com/power](http://www.artesyn.com/power)  
For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)