


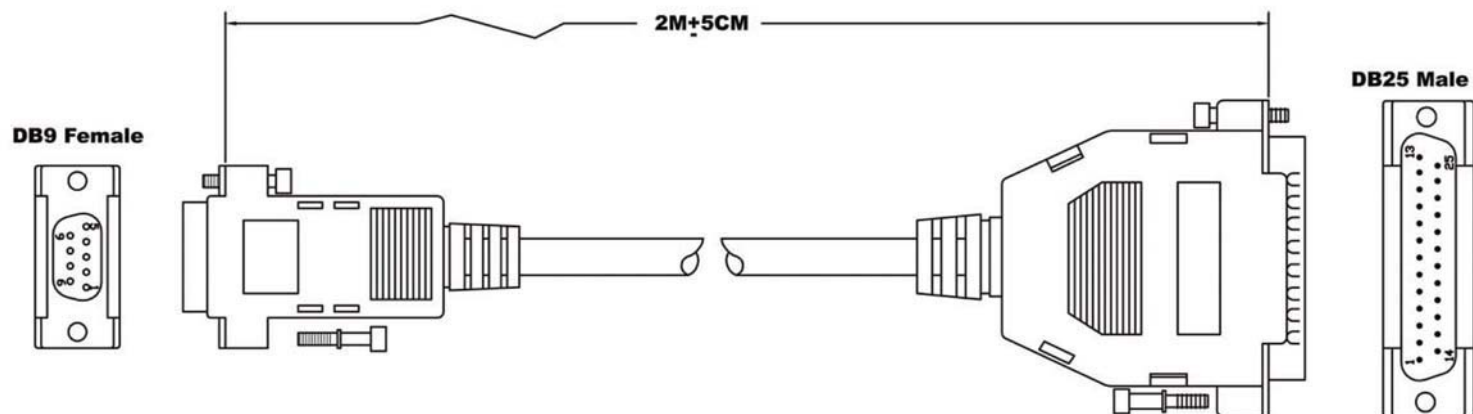

Configuration:

DB9F

DB25M

1	_____	8
2	_____	3
3	_____	2
4	_____	20
5	_____	7
6	_____	6
7	_____	4
8	_____	5
9	_____	22

Shield _____ Shield

Material:

- 1.Cable: #28 9C+1+AL/MY (Beige PVC Jacket) O.D:6.0MM
- 2.Both connectors with normal type
- 3.Screw(Metal): #4-40UNC Type
- 4.Assembly(Speed Hood) Type

Notes:

- 1.Total Length: 2M±5CM
2.Color: Beige
3.Assembly Type

Scale	1:1						Name	Item No. AK125-2-R (2.0 M) AK128-.25-R (0.25M)
TOLERANCE					Drawn	11.14.11	Chappell	
X.X	±0.40							Title Null Modern Cable (AT), D-Sub 9 Pin Female to D-Sub 25 Pin Male
X.XX	±0.25				Approved			
X.XXX	±0.15							Drawing No.
Angle	±3°							
								rev00
			Modification	Date	Name			Replace
								Sheet

