


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

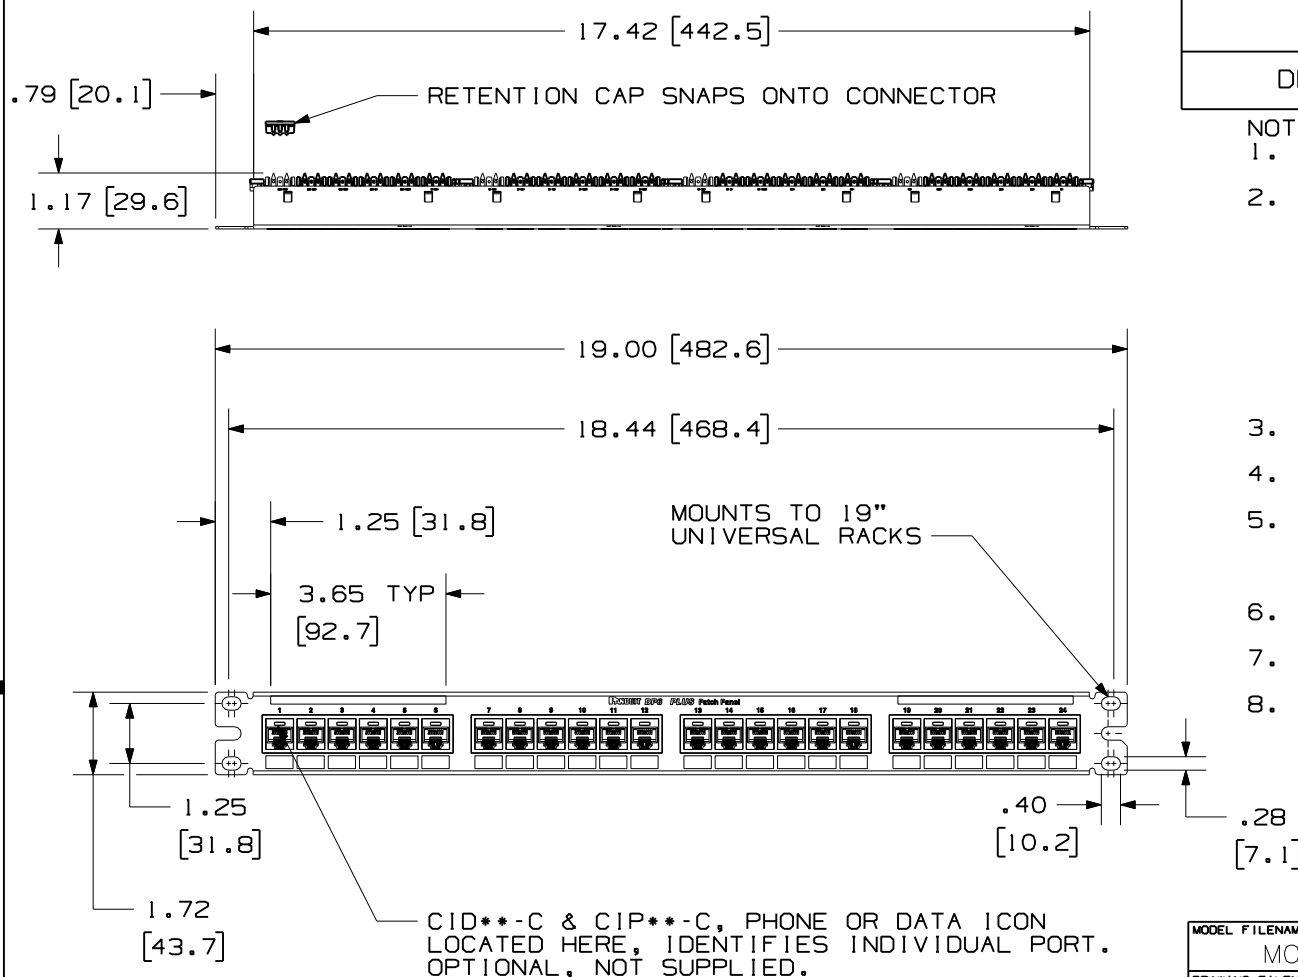

PANDUIT PART NO.	WEIGHT (APPROX.)
DP24688TGY	1.25 lb (567 g)

NOTES:

- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
- MATERIAL:
 PANEL HOUSING: STEEL
 RJ45 MODULE: THERMOPLASTIC RESIN UL94V-0
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
 RETENTION CAP:
 THERMOPLASTIC RESIN UL94V-0
- 24 PORT PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS AND (4) METRIC M6x1x15MM SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN PARENTHESSES ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCH DOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

CID**-C & CIP**-C, PHONE OR DATA ICON LOCATED HERE, IDENTIFIES INDIVIDUAL PORT. OPTIONAL, NOT SUPPLIED.

MODEL FILENAME	MO2088AA_1RU_24PORT_PANEL_ASSY_06	SIZE	A
DRAWING FILENAME	MO2479JF_DC242_00A		

TITLE
 DP6 PLUS 24 PORT PATCH PANEL CUSTOMER DRAWING

	PANDUIT TM CORP. TINLEY PARK, IL 60477	I.I. NUMBER	
		PRODUCT SPEC	

	THIRD ANGLE PROJECTION	ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED.	WORK INSTRUCTION
		DIMENSIONAL TOLERANCES ARE: (.X) ± .03 (.XXX) ± .005 (.XX) ± .01 ANGLES ± 1°	SCALE .25:1

DRAWN BY LZ	REVIEW DRAWING NUMBERS	PART NO. SEE CHART
DATE 3-4-06		DRAWING NO. 02479-242
CHK'D		

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	3-6-06	LZ		RELEASED TO PRODUCTION	02479-242				