


20 STERN AVE.
 SPRINGFIELD, NEW JERSEY 07081
 U.S.A.

ZENER DIODE

TELEPHONE: (201) 376-2922
 (212) 227-6005
 FAX: (201) 376-8960

Zener Type No.	Zener Voltage at I _{ZT} Volts	@ I _{ZT} mA	Max. Zener Impedance @ I _{ZT} Ohms	Zener Voltage Tolerance	Power Rating
1N1816	13.0	500.0	2.0	No Suffix = 10% Suffix A = 5% Suffix C = Double Anode (10%)	10 watt
1N1817	15.0	"	"		"
1N1818	16.0	"	3.0		"
1N1819	18.0	"	"		"
1N1820	20.0	250.0	"		"
1N1821	22.0	"	"		"
1N1822	24.0	"	"		"
1N1823	27.0	"	"		"
1N1824	30.0	"	4.0		"
1N1825	33.0	150.0	"		"
1N1826	36.0	"	5.0		"
1N1827	39.0	"	"		"
1N1828	43.0	"	6.0		"
1N1829	47.0	"	7.0		"
1N1830	51.0	"	8.0		"

DO-4

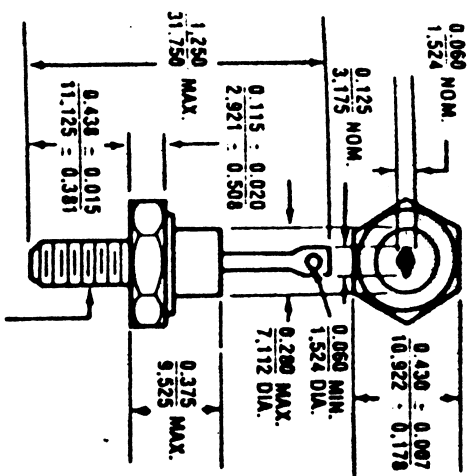

10-32 UNF-2A (MOD) PITCH DIA.
 MIN. 1.656 MAX. 1.697
 TO WITHSTAND A TORQUE UP
 TO 30 IN.-LB. WHEN NUT IS
 TIGHTENED ON STUD

Quality Semi-Conductors

