

RT4-D10D1WR

SMD - DIP 10 Package

- Operating temperature range:
-40°C to +105°C
- High efficiency up to 82%
- Miniature SMD package
- Isolation voltage: 1.5K VDC
- Internal surface mounted design
- No external component required
- International standard pin-out
- Continuous Short Circuit Protection



RoHS

RT4-D10D1WR series are specially designed for applications where an isolated voltage is required in a distributed power supply system. They are suitable for:

1. Where the voltage of the input power supply is stable (voltage variation: $\pm 10\%V_{in}$);
2. Where isolation between input and output is necessary (isolation voltage $\leq 1500\text{VDC}$);
3. Where the output voltage regulation is not strictly required;
4. Typical application: preceding-stage interference isolation condition; ground-interference canceled condition; digit circuit condition; Voltage-isolation converting condition; normal low-frequency artificial circuit condition; relay drive circuit condition, etc.

Selection Guide						
	Part No.	Input Voltage (VDC)	Output		Efficiency (%,Min./Typ.) @ Full Load	Max. Capacitive Load (μF)
		Nominal (Range)	Output Voltage (VDC)	Output Current (mA)(Max./Min.)		
	RT4-0305D10D1WR	3.3 (2.97-3.63)	± 5	$\pm 100/\pm 10$	72/76	100
	RT4-0312D10D1WR		± 12	$\pm 42/\pm 5$	73/77	
	RT4-0315D10D1WR		± 15	$\pm 33/\pm 3$	74/78	
	RT4-0505D10D1WR	5 (4.5-5.5)	± 5	$\pm 100/\pm 10$	76/80	
	RT4-0509D10D1WR		± 9	$\pm 56/\pm 6$	76/80	
	RT4-0512D10D1WR		± 12	$\pm 42/\pm 5$	75/79	
	RT4-0515D10D1WR		± 15	$\pm 33/\pm 3$	77/81	
	RT4-0524D10D1WR		± 24	$\pm 21/\pm 2$	77/81	
	RT4-1205D10D1WR	12 (10.8-13.2)	± 5	$\pm 100/\pm 10$	76/80	
	RT4-1209D10D1WR		± 9	$\pm 56/\pm 6$	76/80	
	RT4-1212D10D1WR		± 12	$\pm 42/\pm 5$	77/81	
	RT4-1215D10D1WR		± 15	$\pm 33/\pm 3$	77/81	
	RT4-1224D10D1WR		± 24	$\pm 21/\pm 2$	77/81	
	RT4-1515D10D1WR	15 (13.5-16.5)	± 15	$\pm 33/\pm 3$	77/81	
	RT4-2405D10D1WR		± 5	$\pm 100/\pm 10$	76/80	
	RT4-2409D10D1WR		± 9	$\pm 56/\pm 6$	76/80	
	RT4-2412D10D1WR		± 12	$\pm 42/\pm 5$	77/81	
	RT4-2415D10D1WR		± 15	$\pm 33/\pm 3$	78/82	
	RT4-2424D10D1WR		± 24	$\pm 21/\pm 2$	74/80	

Note: *The capacitive loads of positive and negative outputs are identical.

Input Specifications							
Item	Operating Conditions		Min.	Typ.	Max.	Unit	
Input Current (full load / no-load)	3.3V input	--	389/25	--/70	--	mA	
	5V input	--	250/20	--/60	--		
	12V input	--	104/15	--/50	--		
	15V input	--	83/12	--/35	--		
	24V input	--	52/10	--/30	--		
Reflected Ripple Current		--	15	--	--	mA	
Surge Voltage (1sec. max.)	3.3V input	-0.7	--	5	--	VDC	
	5V input	-0.7	--	9	--		
	12V input	-0.7	--	18	--		
	15V input	-0.7	--	21	--		
	24V input	-0.7	--	30	--		
Input Filter			Filter capacitor				
Hot Plug			Unavailable				

Output Specifications						
Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy			See tolerance envelope curve(Fig. 1)			
Line Regulation	Input voltage change: ±1%		--	--	±1.2	--
Load Regulation	10%-100% load	5VDC output	--	12	--	%
		9VDC output	--	9	--	
		12VDC output	--	8	--	
		15VDC output	--	7	--	
		24VDC output	--	6	--	
Ripple & Noise*	20MHz bandwidth		--	60	150	mVp-p
Temperature Coefficient	Full load		--	--	±0.03	%/°C
Short Circuit Protection**	RT4-24xxD10D1WR/RT4-0524D10D1WR/ RT4-03xxD101WR		--	--	1	s
	Others		Continuous, self-recovery			

Note: *Ripple and noise are measured by parallel cable method, please see DC-DC Converter Application Notes for specific operation;

**Supply voltage must be discontinued at the end of short circuit duration for RT4-524D10D1WR model and RT4-4xxD10D1WR series.

General Specifications						
Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation Voltage	Input-output, with the test time of 1 minute and the leak current lower than 1mA		1500	--	--	VDC
Isolation Resistance	Input-output, isolation voltage 500VDC		1000	--	--	MΩ
Isolation Capacitance	Input-output, 100KHz/0.1V		--	20	--	pF
Operating Temperature	Derating when operating temperature up to 100°C, (see Fig. 2)		-40	--	105	°C
Storage Temperature			-55	--	125	
Casing Temperature Rise	Ta=25°C, nominal input, full load output		--	25	--	
Pin Welding Resistance Temperature	Welding spot is 1.5mm away from the casing, 10 seconds		--	--	300	
Storage Humidity	Non-condensing		--	--	95	%RH
Reflow Soldering Temperature	Peak temp. ≤ 245°C, maximum duration time ≤ 60s at 217°C. For actual application, please refer to IPC/JEDEC J-STD-020D.1.					
Switching Frequency	Full load, nominal input voltage		--	100	--	KHz
MTBF	MIL-HDFK-217F@25°C		3500	--	--	K hours

RT4-D10D1WR

Physical Specifications	
Casing Material	Epoxy resin (UL94-V0)
Dimensions	15.24*11.20*7.25 mm
Weight	2.0g (Typ.)
Cooling Method	Free air convection

EMC Specifications		
EMI	RE	CISPR22/EN55022 CLASS B (see Fig. 5 for recommended circuit)
EMS	ESD	IEC/EN61000-4-2 Contact $\pm 6\text{KV}$ perf. Criteria B

Product Characteristic Curve





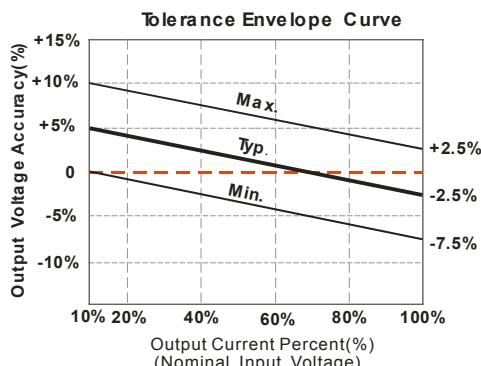


Fig. 1

Fig. 2

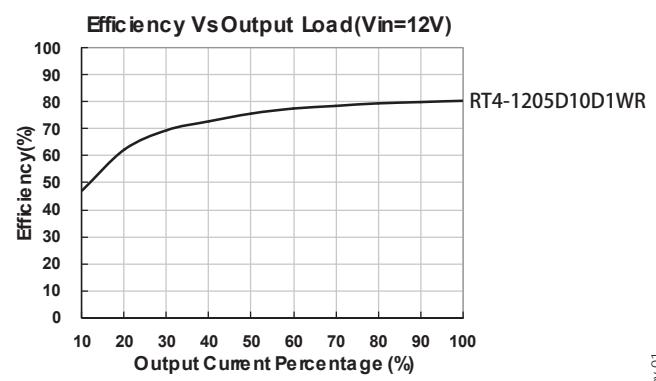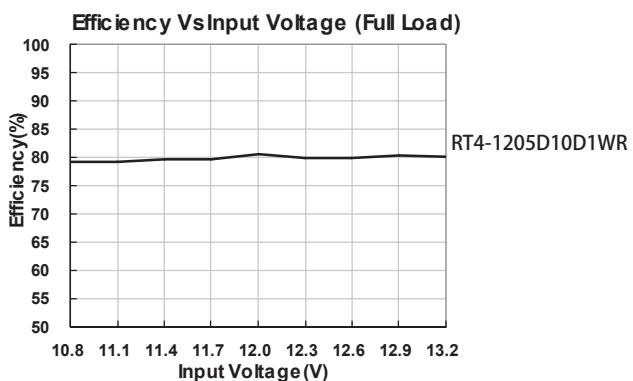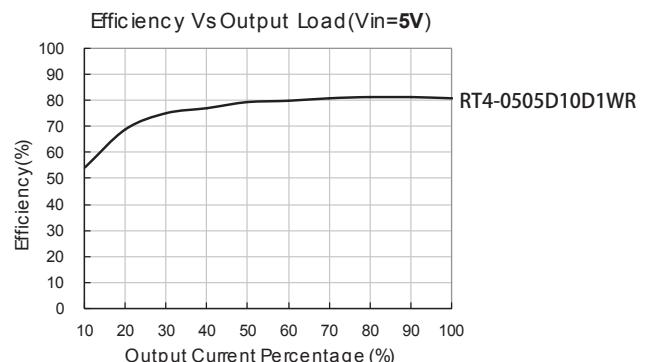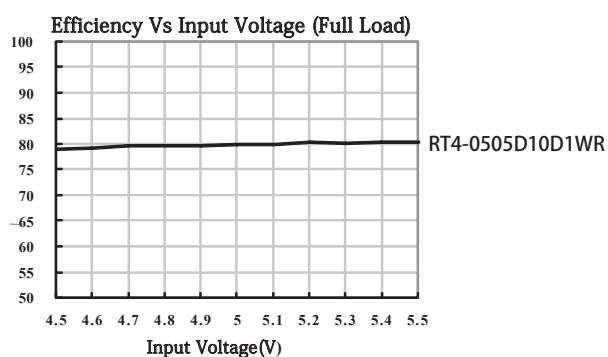

Design Reference

1. Typical application circuit

If it is required to further reduce input and output ripple, a filter capacitor may be connected to the input and output terminals, see Fig.3.

Moreover, choosing a suitable filter capacitor is very important, start-up problems may be caused if the capacitance is too large. Under the condition of safe and reliable operation, the recommended capacitive load values are shown in Table 1.

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (see Fig. 4).

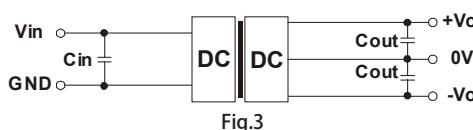


Fig.3

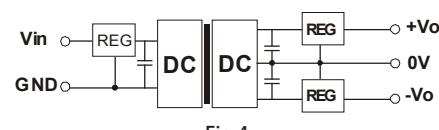


Fig.4

Recommended capacitive load value table (Table 1)

Vin(VDC)	Cin(µF)	Vo (VDC)	Cout(µF)
3.3	4.7	±5	4.7
5	4.7	±9	2.2
12	2.2	±12	1
15	2.2	±15	1
24	1	±24	0.47

2. EMC solution-recommended circuit

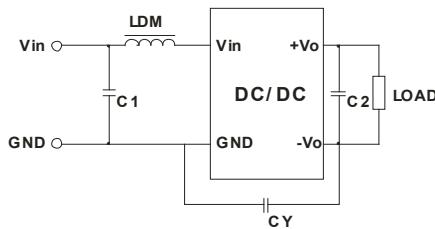


Fig.4

Input voltage (VDC)	3.3/12	15/24
	C1	4.7µF /50V
EMI	C2	Refer to the Cout in Fig.3
	LDM	6.8µH
	CY	-- 1nF /2KV

Note: 1. 24V input series, 24V output series is subject to CY (CY : 1nF/2KV).

2. It is not needed to add the component in the peripheral circuit when parameter with the symbol of "--".



3. Output load requirements

When using, the minimum load of the module output should not be less than 10% of the nominal load. In order to meet the performance parameters of this datasheet, please connect a 10% dummy load in parallel at the output end, the dummy load is generally a resistor, Please note that the resistor needs to be used in derating.


For more information please find DC-DC converter application notes on rsg-electronic.de

RT4-D10D1WR



DIMENSIONS and recommended layout

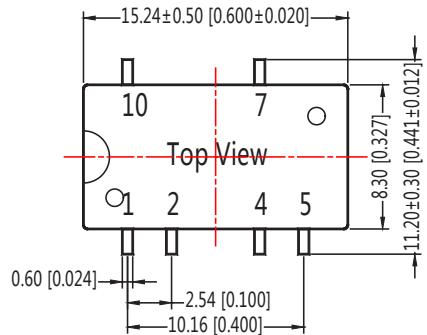

THIRD ANGLE PROJECTION

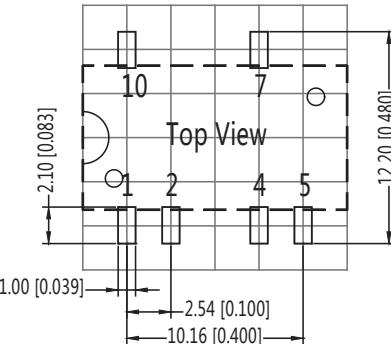

Note: Grid 2.54*2.54mm



Note:
Unit: mm[inch]
Pin section tolerances: ±0.10[±0.004]
General tolerances: ±0.25[±0.010]

Pin-Out	
Pin	Function
1	GND
2	V _{in}
4	0V
5	-V _o
7	+V _o
10	NC

NC: No Connection

The models listed here are just standard type. If you need a product with special specification or you have questions regarding packing standards (Tube oder Tape/Reel) as well as application support, please contact our specialists: sales@rsg-electronic.de or +49 69-984047-41/-28