


## KBU6005-G Thru. KBU610-G

**Reverse Voltage: 50 to 1000V**

**Forward Current: 6.0A**

**RoHS Device**

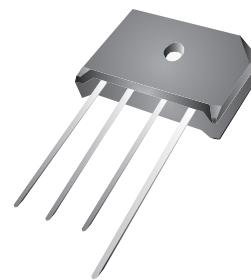


### Features

- Surge overload rating - 175 amperes peak.
- Ideal for printed circuit board.
- Plastic material has U/L flammability classification 94V-0

### Mechanical Data

- Case: Molded plastic, KBU
- Mounting position: Any
- Weight: 7.40grams

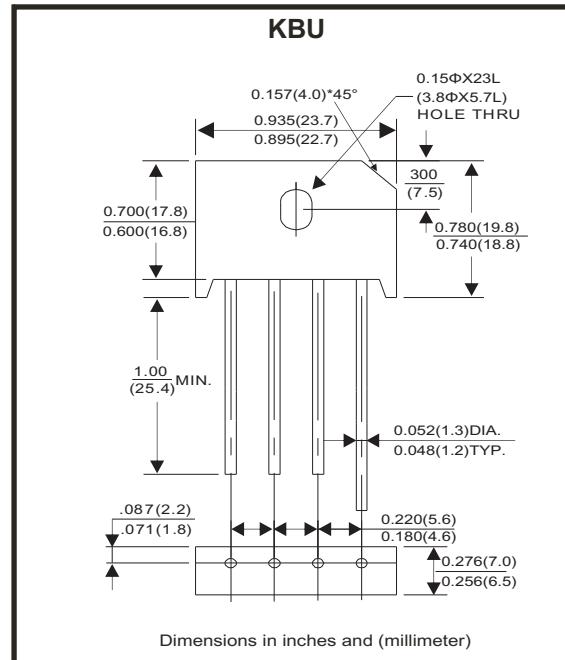

### Maximum ratings and electrical characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Parameter	Symbol	KBU 6005-G	KBU 601-G	KBU 602-G	KBU 604-G	KBU 606-G	KBU 608-G	KBU 610-G	Unit
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Output Current @T <sub>c</sub> =100°C	I <sub>(AV)</sub>				6.0				A
Peak Forward Surge Current 8.3ms single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I <sub>FSM</sub>				175				A
Maximum Instantaneous Forward Voltage Drop per Element at 3.0A	V <sub>F</sub>				1.0				V
Maximum Reverse Leakage Current @T <sub>j</sub> =25°C At Rate DC Blocking Voltage @T <sub>j</sub> =100°C	I <sub>R</sub>				10 200				µA
Typical Junction Capacitance Per Element (Note1)	C <sub>J</sub>				260				pF
Operating Temperature Range	T <sub>J</sub>				-55 to +150				°C
Storage Temperature Range	T <sub>STG</sub>				-55 to +150				°C

Notes:

1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
2. Company reserves the right to improve product design , functions and reliability without notice.

# Silicon Bridge Rectifiers

**Comchip**  
SMD Diode Specialist

## Rating and Characteristics Curves (KBU6005-G Thru. KBU610-G)

Fig.1 - Derating Curve Output Rectified Current

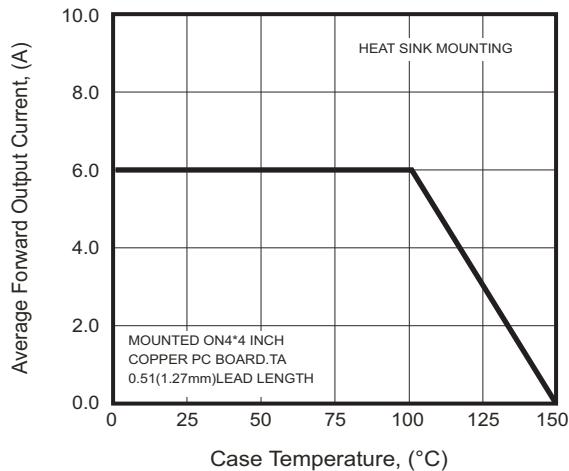


Fig.2 - Typical Forward Characteristics

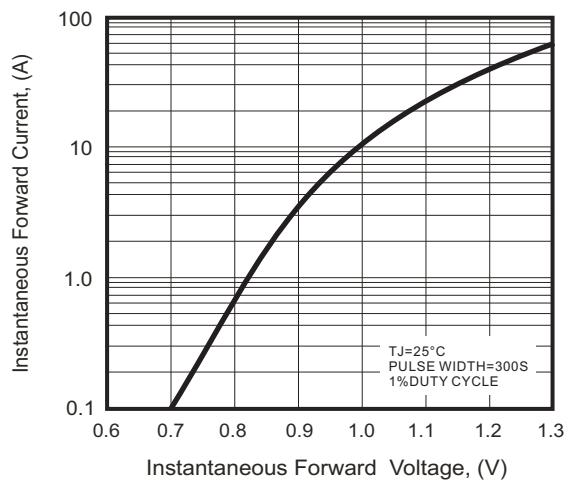


Fig.3 - Maximum Non-retentive Peak Forward Surge Current

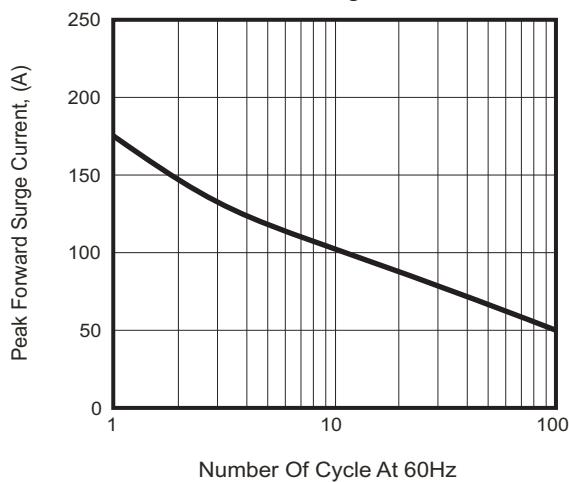


Fig.4 - Typical Junction Capacitance Per Element



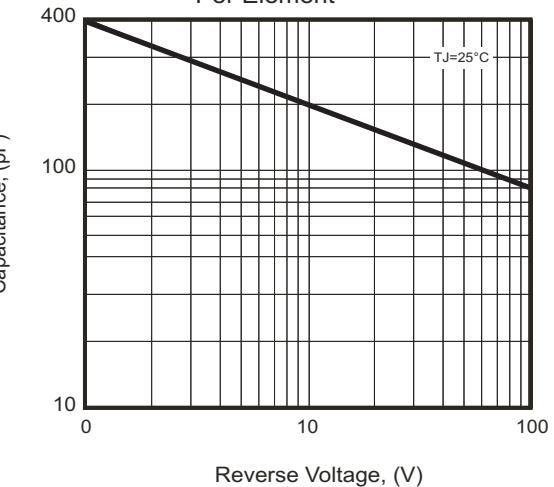


Fig.5 - Typical Reverse Characteristics

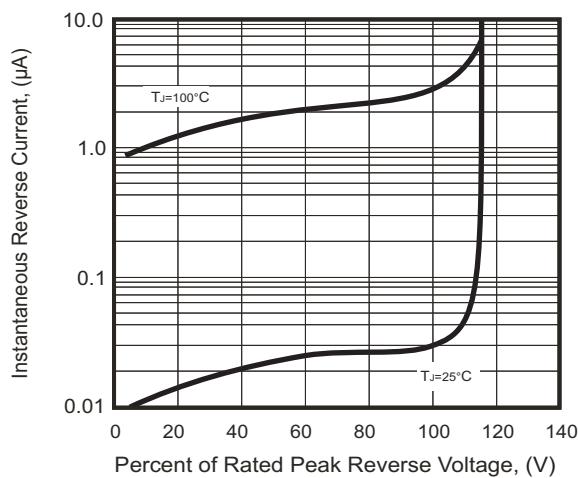

## Marking Code

Part Number	Marking code
KBU6005-G	KBU6005
KBU601-G	KBU601
KBU602-G	KBU602
KBU604-G	KBU604
KBU606-G	KBU606
KBU608-G	KBU608
KBU610-G	KBU610

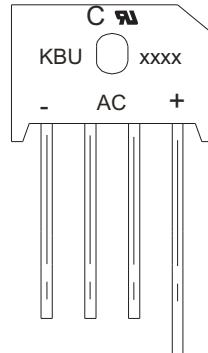

XXXX / XXXXX = Product type marking code  
C = Comchip Logo

## Standard Packaging

Case Type	BULK PACK	
	BOX ( pcs )	CARTON ( pcs )
KBU	400	2,400