



PINGWEI ENTERPRISE

## SR220/SB220 THRU SR2200/SB2200

### 2.0AMPS. SCHOTTKY BARRIER RECTIFIERS


#### FEATURE

- . High current capability
- . Low forward voltage drop
- . Low power loss, high efficiency
- . High surge capability
- . High temperature soldering guaranteed  
260°C /10sec/ 0.375" lead length at 5 lbs tension

#### MECHANICAL DATA

- . Terminal: Plated axial leads solderable per MIL-STD 202E, method 208C
- . Case: Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy
- . Polarity: color band denotes cathode
- . Mounting position: any

#### DO-15

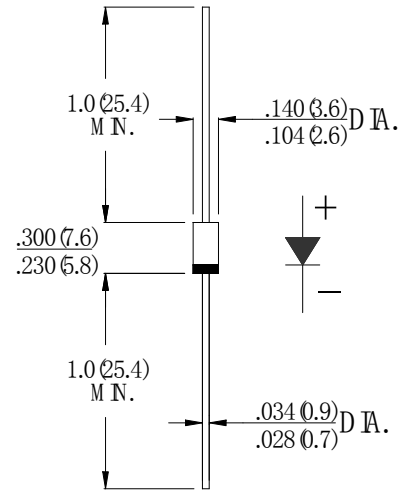

Dimensions in inches and (millimeters)

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

Type Number	SYMBOL	SR	SR	SR	SR	SR	SR	SR	SR	SR	SR	uni ts	
		220	230	240	250	260	280	290	2100	2150	2200		
		SB	SB	SB	SB	SB	SB	SB	SB	SB	SB		
		220	230	240	250	260	280	290	2100	2150	2200		
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	50	60	80	90	100	150	200	V	
Maximum RMS Voltage	$V_{RMS}$	14	21	28	35	42	56	63	70	105	140	V	
Maximum DC blocking Voltage	$V_{DC}$	20	30	40	50	60	80	90	100	150	200	V	
Maximum Average Forward Rectified Current .375"(9.5mm) lead length at $T_L=90^\circ\text{C}$	$I_{F(AV)}$	2.0										A	
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	50.0										A	
Maximum Forward Voltage at 2.0A DC	$V_F$	0.45	0.55		0.70		0.85		0.95			V	
Maximum DC Reverse Current at rated DC blocking voltage	$I_R$	@ $T_A=25^\circ\text{C}$	0.5					0.1					mA
		@ $T_A=100^\circ\text{C}$	40.0					10.0					
Typical Junction Capacitance (Note 1)	$C_J$	200					48					pF	
Typical Thermal Resistance (Note 2)	$R_{(JA)}$	65										$^\circ\text{C}/\text{W}$	
Storage Temperature	$T_{STG}$	-55 to +150										$^\circ\text{C}$	
Operation Junction Temperature	$T_J$	-55 to +125					-55 to +150					$^\circ\text{C}$	

#### Note:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
2. Thermal Resistance from Junction to Ambient at 0.375" (9.5mm) lead length, vertical P.C. Board Mounted.