




1. Dimensions:

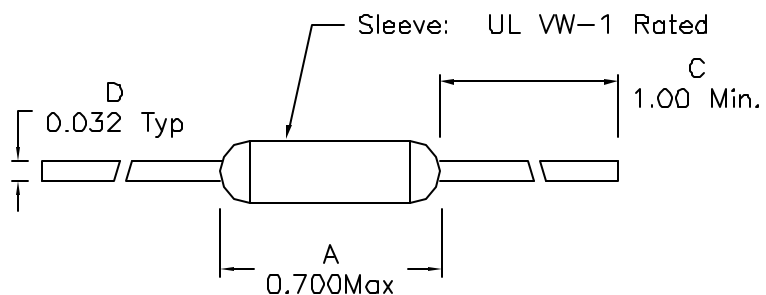

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 100uH±10% @1KHz, 1.0V

DC Res.: 0.208 Ohms Max

Rated Current: 1.1Adc Max (Based on 40°C Temp Rise)

Incremental Current: 0.73Adc Max (Based on 10% drop in OCL)

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

Doc. Rev. A/2

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc www.XFMRS.com		Title: Axial Leaded Inductor	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch SCALE 2:1 SHT 1 OF 1	P/N: XFAL6326-101K		REV. A
	DWN.	JUAN	Oct-23-00
	CHK.	LIAO	Oct-23-00
	APP.	BW	Oct-23-00