


# Shielded Drum Core Inductor

PA4330.XXXNLT Series



- ⊕ **Height:** 1.0mm Max
- ⊕ **Footprint:** 2.2mm x 1.8mm Max
- ⊕ **Current Rating:** up to 3.1A
- ⊕ **Inductance Range:** 0.47uH to 2.2uH
- ⊕ *Shielded magnetic circuit reduces leakage flux, Fe base metal core enables high saturation and metalized core termination results in excellent shock resistance*

## Electrical Specifications @ 25°C – Operating Temperature -40°C to 125°C

PART NUMBER	INDUCTANCE 1MHz, 1V uH +/-20%	RATED CURRENT A	MIN. SELF-RESONANT FREQUENCY MHz	DC RESISTANCE		SATURATION CURRENT (20°C) A	HEATING CURRENT	
				MAX.	TYP.		20°C Rise	40°C Rise
				mΩ	mΩ		A	A
PA4330.471NLT	0.47	3.1	102	49	41	3.8	2.7	3.1
PA4330.681NLT	0.68	2.8	77	65	57	3.5	2.5	2.8
PA4330.102NLT	1	2.35	70	90	75	3.35	2.05	2.35
PA4330.222NLT	2.2	1.7	39	170	142	1.8	1.45	1.7





### NOTES:

- Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
- The rated current as listed is either the saturation current (20°C) or the heating current (40°C Rise) depending on which value is lower.
- The saturation current is the current at which the initial inductance drops approximately 30% at the stated ambient temperature. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
- The heating current is the DC current required to raise the component temperature by approximately 20°C or 40°C. Take note that the components' performance varies depending on the system conditions. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- Maximum voltage across terminals to be limited to <25Vdc.

## Mechanical


## Schematic

### PA4330.XXXNLT



FINAL OUTLINE


SUGGESTED PAD LAYOUT




Part Number	A (max)	B (max)	C	D	E	F	G	H	J
PA4330.XXXNLT	2.2 MAX	1.8 MAX	1.0 MAX	(1.5)	(0.6)	(0.8)	(1.70)	(0.7)	(0.7)

# Shielded Drum Core Inductor

PA4330.XXXNLT Series



## TAPE & REEL INFO

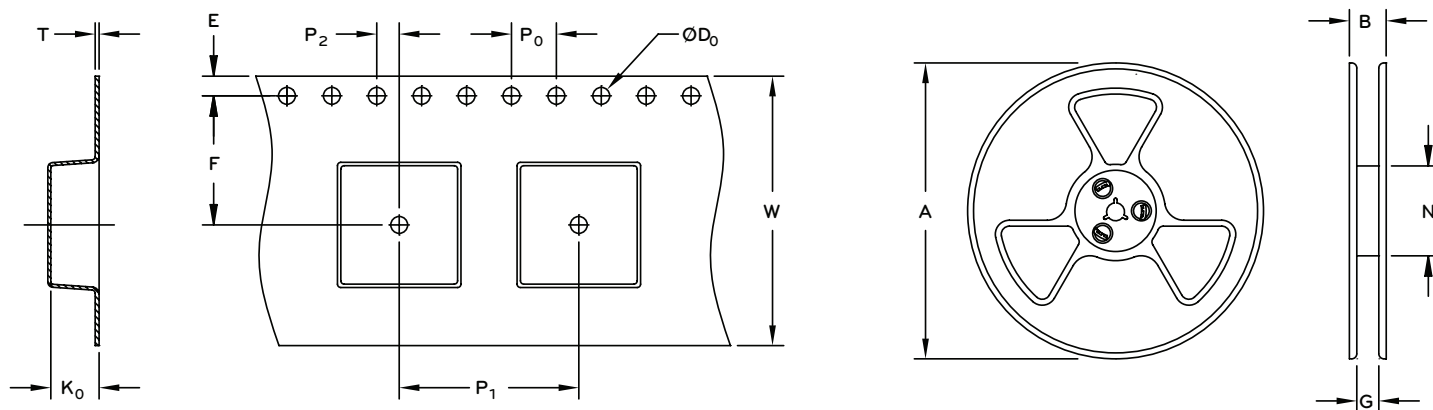

### SURFACE MOUNTING TYPE, REEL/TAPE LIST

TYPE	REEL SIZE (mm)				TAPE SIZE (mm)									QTY
	A	B	G	N	E	F	D <sub>0</sub>	P	P <sub>0</sub>	P <sub>2</sub>	W	T	K <sub>0</sub>	PCS/REEL
PA4330.XXXNLT	Ø178	14.4	8.4	58	1.75	3.5	1.5	4	4	2	8	0.25	1.2	2000

## For More Information

### Pulse Worldwide Headquarters

12220 World Trade Drive  
San Diego, CA 92128  
U.S.A.

Tel: 858 674 8100  
Fax: 858 674 8262

### Pulse Europe

Zeppelinstrasse 15  
71083 Herrenberg  
Germany

Tel: 49 7032 7806 0  
Fax: 49 7032 7806 12

### Pulse China Headquarters

B402, Shenzhen Academy of  
Aerospace Technology Bldg.  
10th Kejinan Road  
High-Tech Zone  
Nanshan District  
Shenzhen, PR China 518057

Tel: 86 755 33966678  
Fax: 86 755 33966700

### Pulse North China

Room 2704/2705  
Super Ocean Finance Ctr.  
2067 Yan An Road West  
Shanghai 200336  
China

Tel: 86 21 62787060  
Fax: 86 2162786973

### Pulse South Asia

135 Joo Seng Road  
#03-02  
PM Industrial Bldg.  
Singapore 368363

Tel: 65 6287 8998  
Fax: 65 6287 8998

### Pulse North Asia

3F, No. 198  
Zhongyuan Road  
Zhongli City  
Taoyuan County 320  
Taiwan R. O. C.

Tel: 886 3 4356768  
Fax: 886 3 4356823 (Pulse)  
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2015. Pulse Electronics, Inc. All rights reserved.