

**BC556A/B/C**  
**BC557A/B/C**  
**BC558A/B/C**

**PNP Silicon**  
**Amplifier Transistor**  
**625mW**

**Features**


- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- 150°C Junction Temperature
- Through Hole Package
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Marking: Type Number
- Halogen free available upon request by adding suffix "-HF"

**Mechanical Data**

- Case: TO-92, Molded Plastic
- Polarity: indicated as below.

**Maximum Ratings @ 25°C Unless Otherwise Specified**

Charateristic	Symbol	Value	Unit
Collector-Emitter Voltage	BC556 BC557 BC558	$V_{CEO}$ -65 -45 -30	V
Collector-Base Voltage	BC556 BC557 BC558	$V_{CBO}$ -80 -50 -30	V
Emitter-Base Voltage		$V_{EBO}$ -5.0	V
Collector Current(DC)		$I_C$ -100	mA
Power Dissipation@ $T_A=25^\circ C$		$P_d$ 625 5.0	mW mW/°C
Power Dissipation@ $T_C=25^\circ C$		$P_d$ 1.5 12	W mW/°C
Thermal Resistance, Junction to Ambient Air		$R_{\theta JA}$ 200	°C/W
Thermal Resistance, Junction to Case		$R_{\theta JC}$ 83.3	°C/W
Operating & Storage Temperature		$T_j, T_{STG}$ -55~150	°C

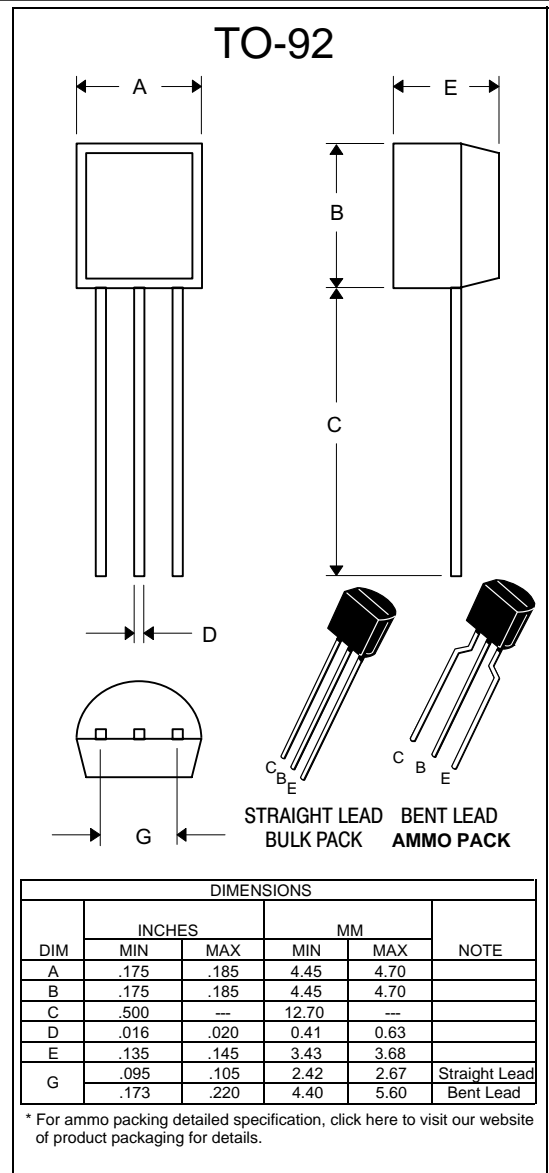


**ELECTRICAL CHARACTERISTICS (T<sub>a</sub>=25°C unless otherwise specified)**

Parameter		Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	BC556	V <sub>(BR)CBO</sub>	I <sub>C</sub> = -0.1mA, I <sub>E</sub> =0	-80			V
	BC557			-50			
	BC558			-30			
Collector-emitter breakdown voltage	BC556	V <sub>(BR)CEO</sub>	I <sub>C</sub> =-2mA, I <sub>B</sub> =0	-65			V
	BC557			-45			
	BC558			-30			
Emitter-base breakdown voltage		V <sub>(BR)EBO</sub>	I <sub>E</sub> =-100μA, I <sub>C</sub> =0	-5			V
Collector cut-off current	BC556	I <sub>CBO</sub>	V <sub>CB</sub> =-70V, I <sub>E</sub> =0			-0.1	μA
	BC557		V <sub>CB</sub> =-45V, I <sub>E</sub> =0			-0.1	μA
	BC558		V <sub>CB</sub> =-25V, I <sub>E</sub> =0			-0.1	μA
Collector cut-off current	BC556	I <sub>CEO</sub>	V <sub>CE</sub> =-60V, I <sub>B</sub> =0			-0.1	μA
	BC557		V <sub>CE</sub> =-40V, I <sub>B</sub> =0			-0.1	μA
	BC558		V <sub>CE</sub> =-25V, I <sub>B</sub> =0			-0.1	μA
Emitter cut-off current		I <sub>EBO</sub>	V <sub>EB</sub> =-5V, I <sub>C</sub> =0			-0.1	μA
DC current gain		h <sub>FE</sub> *	V <sub>CE</sub> =-5V, I <sub>C</sub> =-2mA	120		800	
Collector-emitter saturation voltage		V <sub>CE(sat)</sub>	I <sub>C</sub> =-10mA, I <sub>B</sub> =-0.5mA			-0.3	V
			I <sub>C</sub> =-100mA, I <sub>B</sub> =-5mA			-0.65	V
Base-emitter saturation voltage		V <sub>BE(sat)</sub>	I <sub>C</sub> =-10mA, I <sub>B</sub> =-0.5mA			-0.8	V
			I <sub>C</sub> =-100mA, I <sub>B</sub> =-5mA			-1	V
Base-emitter voltage		V <sub>BE</sub>	V <sub>CE</sub> =-5V, I <sub>C</sub> =-2mA	-0.55		-0.7	V
			V <sub>CE</sub> =-5V, I <sub>C</sub> =-10mA			-0.82	V
Collector output capacitance		C <sub>ob</sub>	V <sub>CB</sub> =-10V, I <sub>E</sub> =0, f=1MHz			6	pF
Transition frequency	BC556	f <sub>T</sub>	V <sub>CE</sub> =-5V, I <sub>C</sub> =-10mA, f=100MHz		150		MHz
	BC557				150		MHz
	BC558				150		MHz


**CLASSIFICATION of h<sub>FE</sub>**

RANK	A	B	C
RANGE	120-220	180-460	420-800


## BC557/BC558

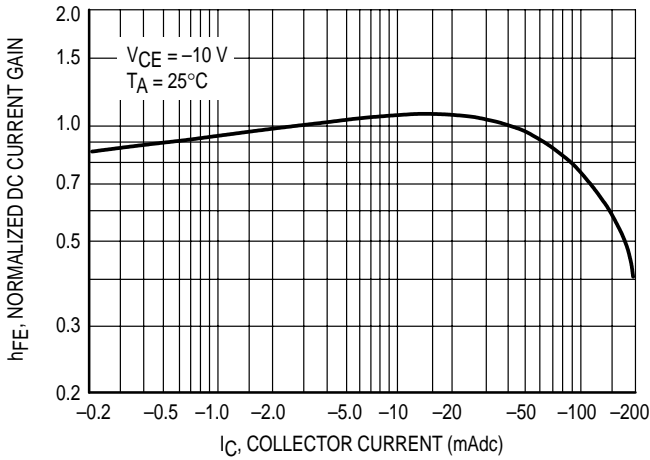


**Figure 1. Normalized DC Current Gain**

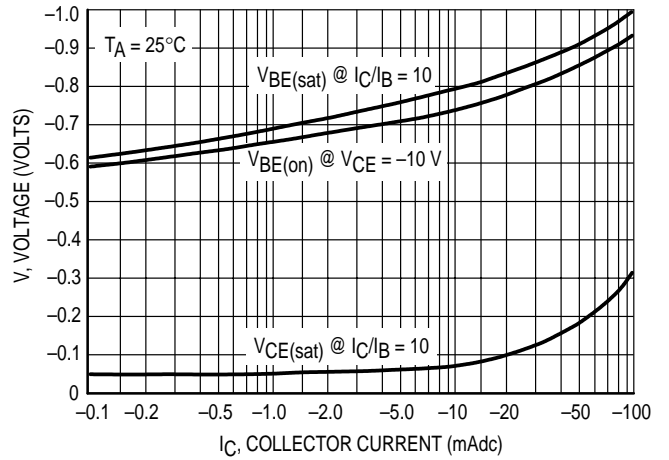


**Figure 2. "Saturation" and "On" Voltages**

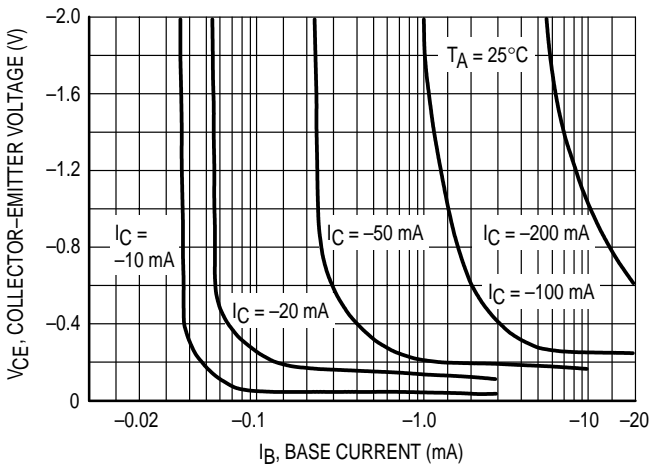


**Figure 3. Collector Saturation Region**

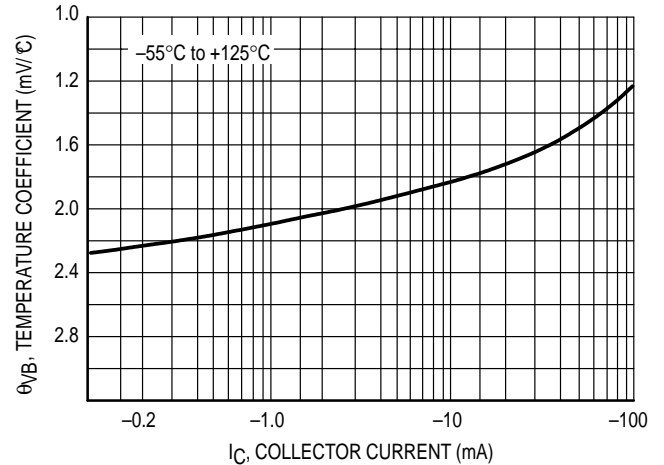

**Figure 4. Base-Emitter Temperature Coefficient**

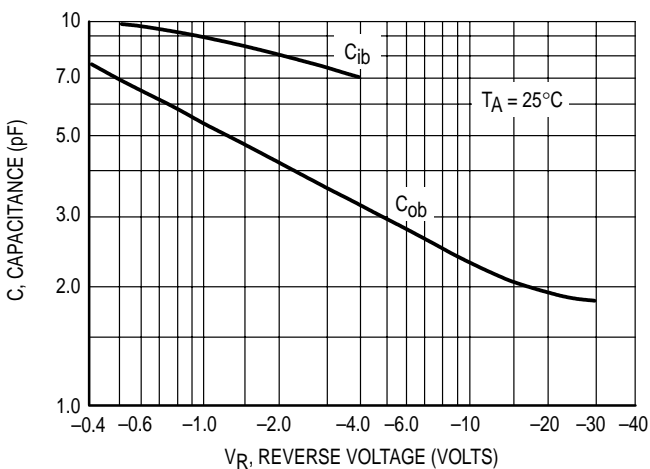


**Figure 5. Capacitances**

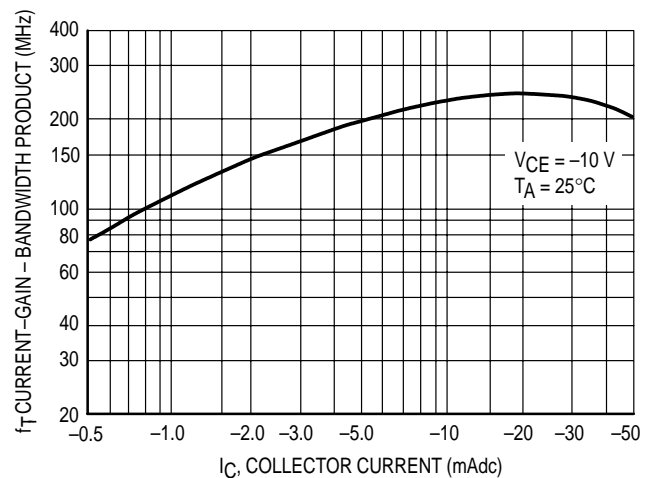


**Figure 6. Current-Gain - Bandwidth Product**


## BC556

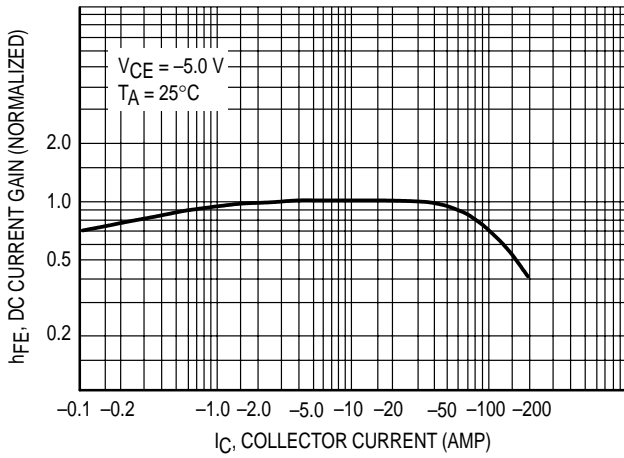


**Figure 7. DC Current Gain**

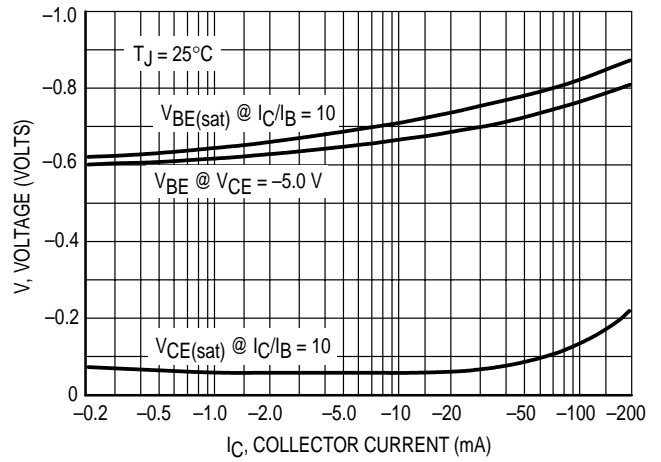


**Figure 8. "On" Voltage**

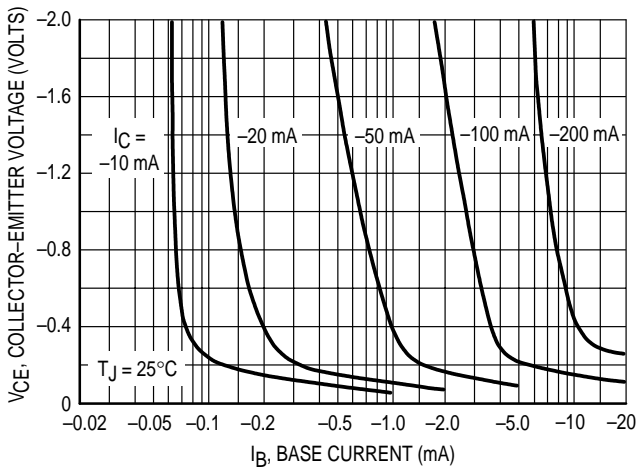


**Figure 9. Collector Saturation Region**

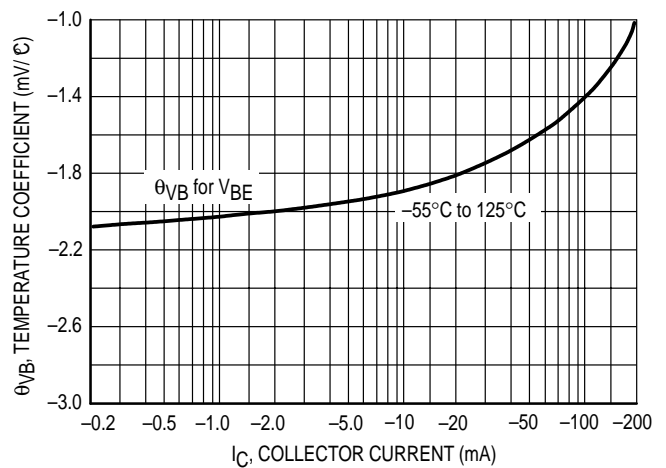

**Figure 10. Base-Emitter Temperature Coefficient**

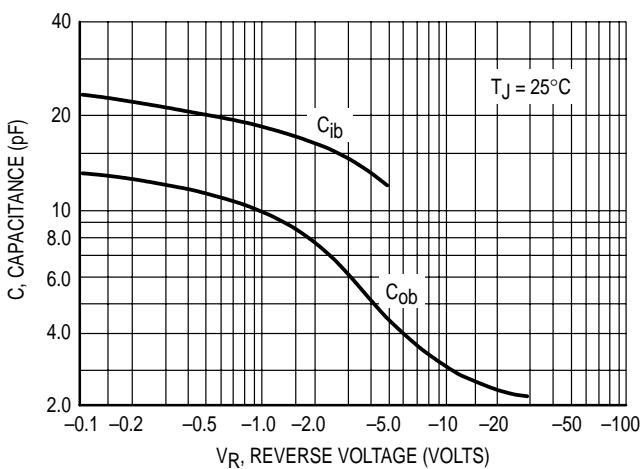

**Figure 11. Capacitance**

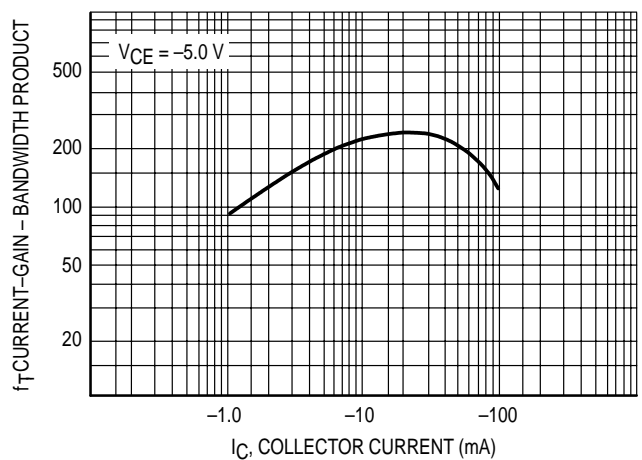

**Figure 12. Current-Gain - Bandwidth Product**



Micro Commercial Components

### Ordering Information :

Device	Packing
Part Number-AP	Ammo Packing: 20Kpcs/Carton
Part Number-BP	Bulk: 100Kpcs/Carton

Note : Adding "-HF" suffix for halogen free, eg. Part Number-AP-HF

**\*\*\*IMPORTANT NOTICE\*\*\***

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*LIFE SUPPORT\*\*\***

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

**\*\*\*CUSTOMER AWARENESS\*\*\***

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.