
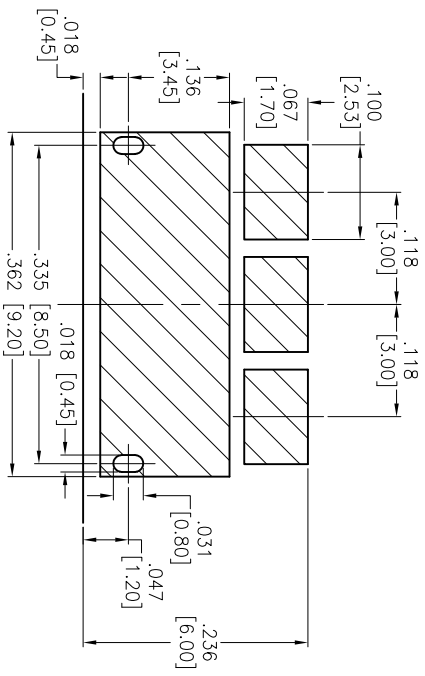
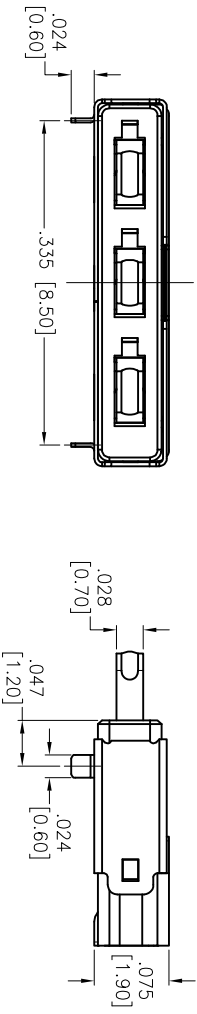


Rev	AWO #	Description	Date	Appr
-		RELEASED	04/18/13	

APPROVED: _____
 DATE: _____ TITLE: _____

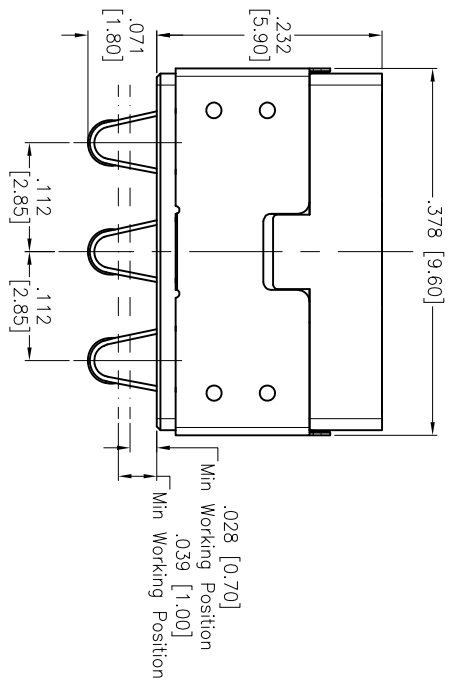

RECOMMENDED PCB LAYOUT

PACKAGED ON TAPE & REEL

SPECIFICATION:

Material:
 Insulator: Hi-Temp Thermoplastic, Rated UL-94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Shell: Brass, Tin plated
Contact Plating:
 Gold flash over Nickel underplate overall,
Electrical:
 Operating voltage: 15V DC max
 Current rating: 2 AMP
 Contact resistance: 30 Mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 500V DC / minute
 Temperature Rating:
 Operating temperature range: -40°C to +85°C
 Environmental:
 Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLE SIZES
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXXX ± .010
 APPROVALS DATE

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: MOBILE BATTERY CONNECTOR, 3 PINS
 .112" [2.85] PITCH, SMT TYPE, GOLD PLATED

DRAWN	TW	04/18/13	SIZE	PART NO.	MBC-Q-03-T/R	REV.	-
CHECKED	GC	04/18/13	REF:	SCALE:	NIS	SHEET	1 OF 1
APPROVED							

6 5 4 3 2 1

A B C D