


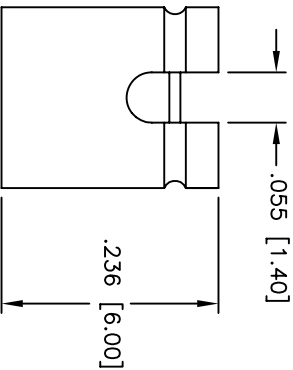


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/5/05	

6 5 4 3 2 1

APPROVED: _____

DATE: _____ TITLE: _____



SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

G = Gold flash over Nickel underplate overall

T = Tin over Copper underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.100 [2.54] MINI SHUNT, OPEN TOP
.236 [6.00] HEIGHT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				PART NO.			
INCHES				Holes			
.X ± .10				ØXX ± .10			
.XX ± .020				ØXXX ± .015			
.XXX ± .015				ØXXX ± .010			
APPROVALS				DATE			
DRAWN				4/5/05			
SS							
CHECKED							
APPROVED							
SIZE				MSB-X			
X							
REF:				SCALE: NTS			
				SHEET 1 OF 1			