

General Description

This planar stripe MOSFET has better characteristics, such as fast switching time, fast reverse recovery time, low on resistance, low gate charge and excellent avalanche characteristics. It is mainly suitable for electronic ballast and switching mode power supplies.

FEATURES



- $V_{DSS} = 500V$, $I_D = 5.0A$
- Drain-Source ON Resistance : $R_{DS(ON)} = 1.4\Omega$ @ $V_{GS} = 10V$
- $Qg(\text{typ}) = 12nC$
- $t_{rr(\text{typ})} = 150ns$ (KF5N50FSA)
- $t_{rr(\text{typ})} = 300ns$ (KF5N50FZA)

MAXIMUM RATING (Tc=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Drain-Source Voltage	V_{DSS}	500	V
Gate-Source Voltage	V_{GSS}	± 30	V
Drain Current	@ $T_c=25^\circ C$	5.0*	A
	@ $T_c=100^\circ C$	2.9*	
	Pulsed (Note1)	13*	
Single Pulsed Avalanche Energy (Note 2)	E_{AS}	270	mJ
Repetitive Avalanche Energy (Note 1)	E_{AR}	8.6	mJ
Peak Diode Recovery dv/dt (Note 3)	dv/dt	20	V/ns
Drain Power Dissipation	$T_c=25^\circ C$	37.9	W
	Derate above 25°C	0.30	W/°C
Maximum Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C
Thermal Characteristics			
Thermal Resistance, Junction-to-Case	R_{thJC}	3.3	°C/W
Thermal Resistance, Junction-to-Ambient	R_{thJA}	62.5	°C/W

* : Drain current limited by maximum junction temperature.

PIN CONNECTION

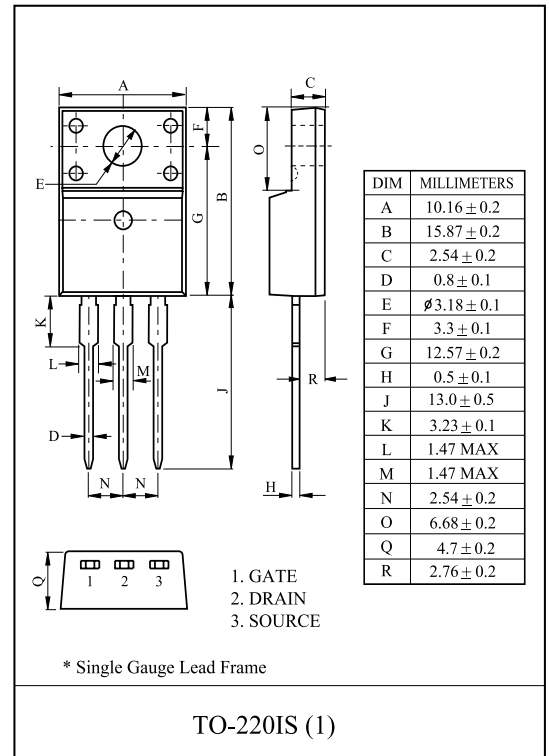

KF5N50FZA/FSA

ELECTRICAL CHARACTERISTICS (Tc=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Static							
Drain-Source Breakdown Voltage	BV_{DSS}	$I_D=250\mu A, V_{GS}=0V$	500	-	-	V	
Breakdown Voltage Temperature Coefficient	$\Delta BV_{DSS}/\Delta T_j$	$I_D=250\mu A$, Referenced to 25 °C	-	0.55	-	V/°C	
Drain Cut-off Current	I_{DSS}	$V_{DS}=500V, V_{GS}=0V$,	-	-	10	μA	
Gate Threshold Voltage	V_{th}	$V_{DS}=V_{GS}, I_D=250\mu A$	2.5	-	4.5	V	
Gate Leakage Current	I_{GSS}	$V_{GS}=\pm 25V, V_{DS}=0V$	-	-	± 10	μA	
Drain-Source ON Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=2.5A$	-	1.15	1.4	Ω	
Dynamic							
Total Gate Charge	Q_g	$V_{DS}=400V, I_D=5A$ $V_{GS}=10V$ (Note4,5)	-	12	-	nC	
Gate-Source Charge	Q_{gs}		-	2.4	-		
Gate-Drain Charge	Q_{gd}		-	5.4	-		
Turn-on Delay time	$t_{d(on)}$	$V_{DD}=250V$ $R_L=50\Omega$ $R_G=25\Omega$ (Note4,5)	-	22.5	-	ns	
Turn-on Rise time	t_r		-	29	-		
Turn-off Delay time	$t_{d(off)}$		-	58	-		
Turn-off Fall time	t_f		-	18	-		
Input Capacitance	C_{iss}	$V_{DS}=25V, V_{GS}=0V, f=1.0MHz$	-	430	-	pF	
Output Capacitance	C_{oss}		-	71	-		
Reverse Transfer Capacitance	C_{rss}		-	7.5	-		
Source-Drain Diode Ratings							
Continuous Source Current	I_S	$V_{GS}<V_{th}$	-	-	5	A	
Pulsed Source Current	I_{SP}		-	-	20		
Diode Forward Voltage	V_{SD}	$I_S=5A, V_{GS}=0V$	-	-	1.4	V	
Reverse Recovery Time	KF5N50FZA	$I_S=5A, V_{GS}=0V,$ $dI_S/dt=100A/\mu s$	-	300	-	ns	
	KF5N50FSA		-	150	-		
Reverse Recovery Charge	KF5N50FZA		Q_{rr}	-	4.8	-	μC
	KF5N50FSA			-	0.42	-	

Note 1) Repetivity rating : Pulse width limited by junction temperature.


Note 2) $L=19.5mH, I_S=5A, V_{DD}=50V, R_G=25\Omega$, Starting $T_j=25^\circ C$.

Note 3) $I_S \leq 5A, dI_S/dt \leq 100A/\mu s, V_{DD} \leq BV_{DSS}$, Starting $T_j=25^\circ C$.

Note 4) Pulse Test : Pulse width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.

Note 5) Essentially independent of operating temperature.

Marking

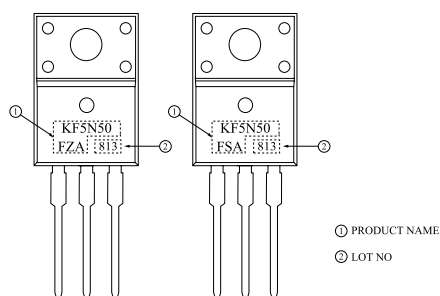

KF5N50FZA/FSA

Fig1. $I_D - V_{DS}$

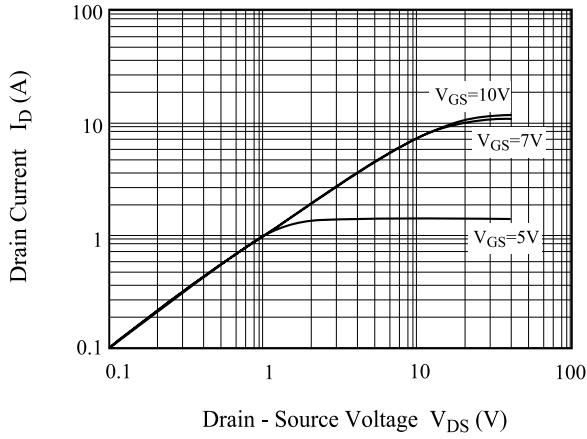


Fig2. $I_D - V_{GS}$

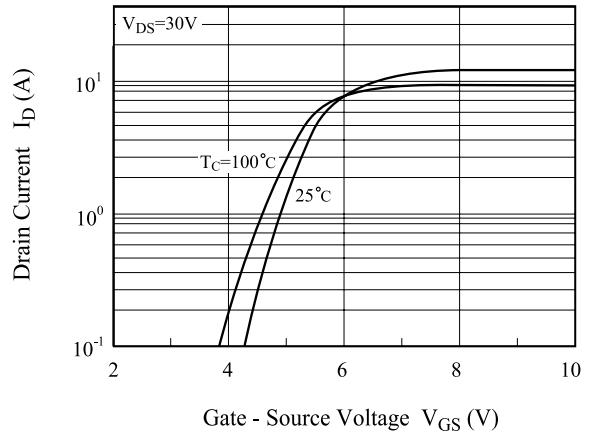


Fig3. $BV_{DSS} - T_j$

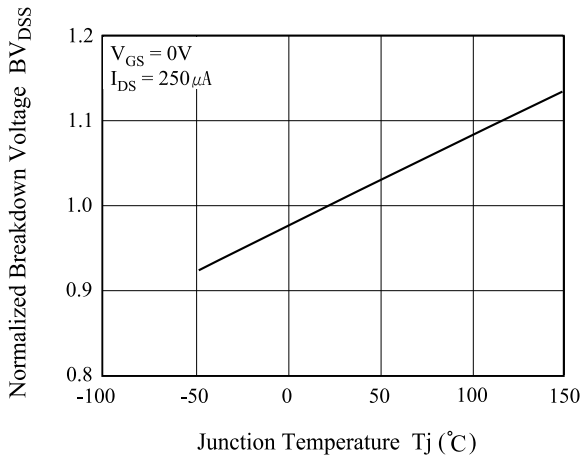


Fig4. $R_{DS(ON)} - I_D$

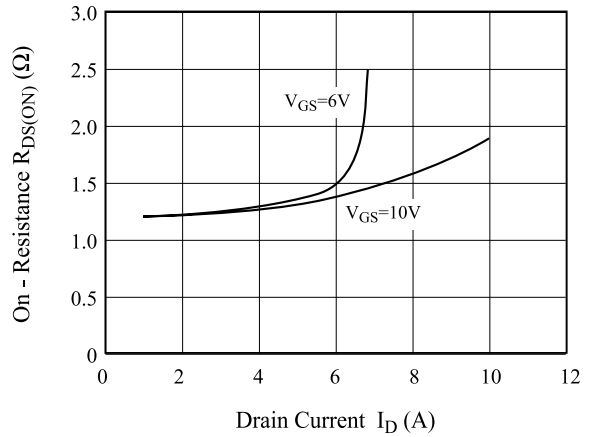


Fig5. $I_S - V_{SD}$


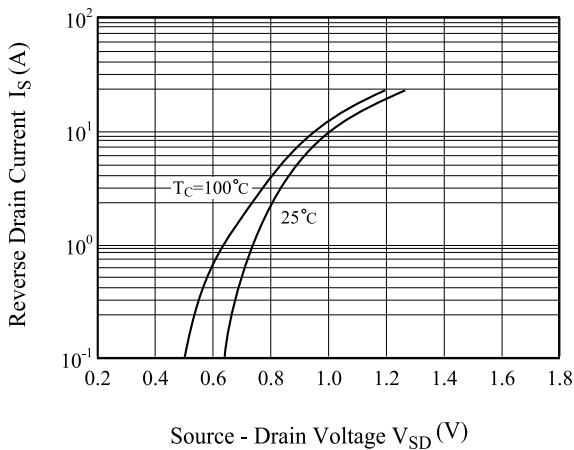


Fig6. $R_{DS(ON)} - T_j$

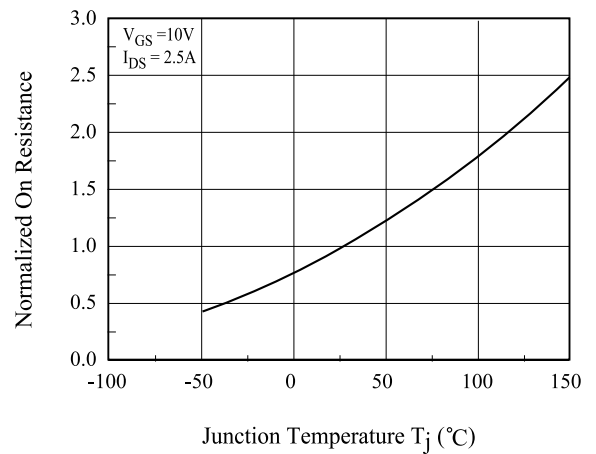

KF5N50FZA/FSA

Fig 7. C - V_{DS}

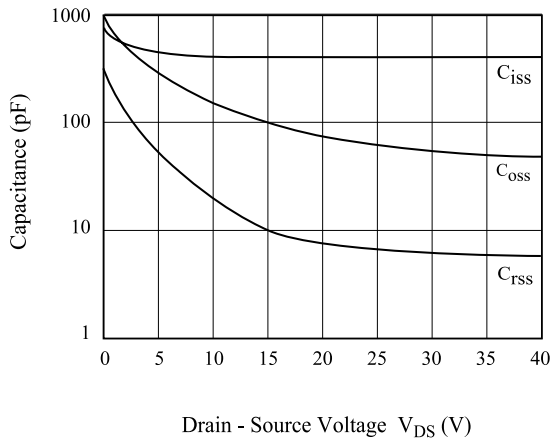


Fig8. Qg- V_{GS}

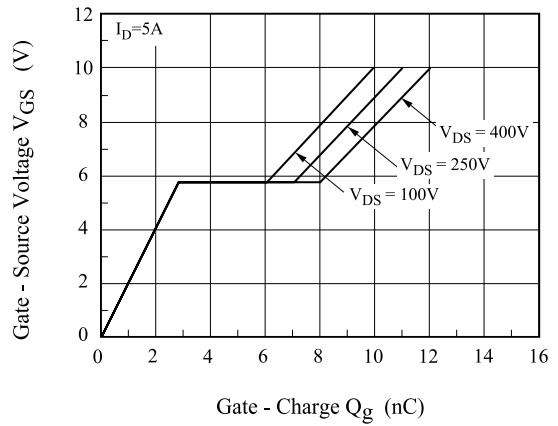


Fig9. Safe Operation Area

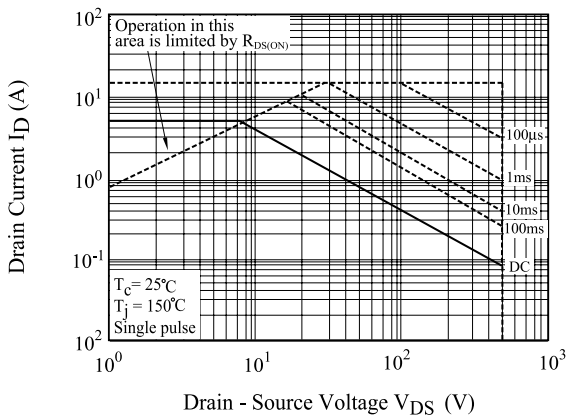


Fig10. ID - T_j


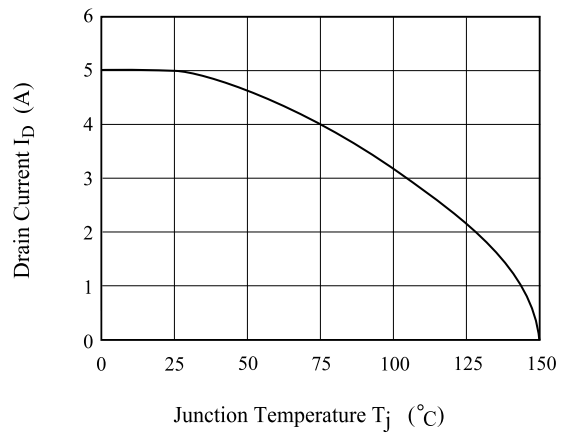


Fig11. Transient Thermal Response Curve

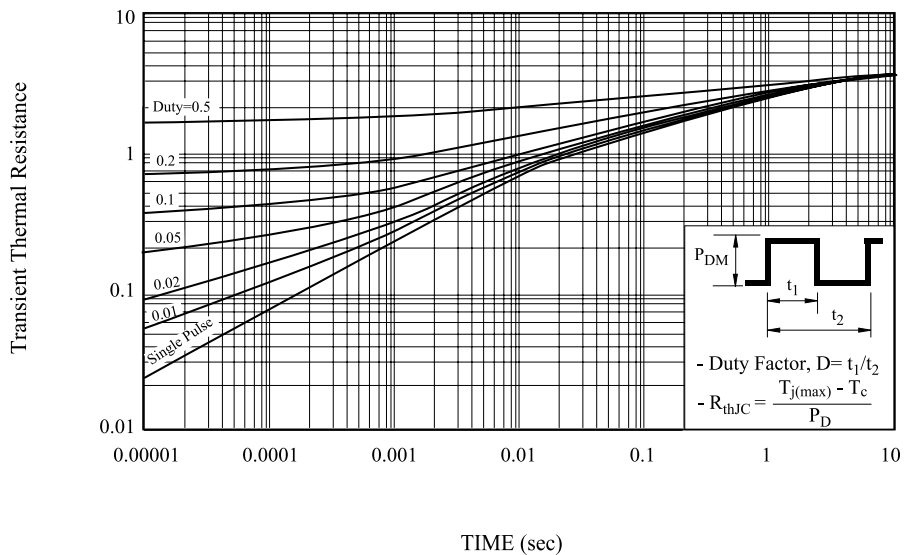

KF5N50FZA/FSA

Fig12. Gate Charge

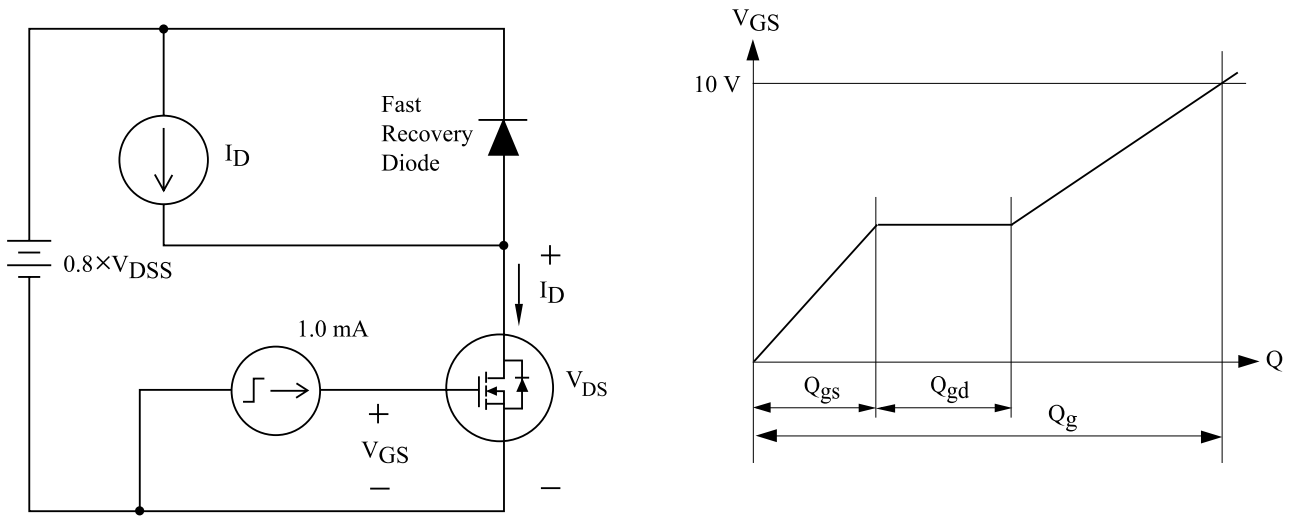


Fig13. Single Pulsed Avalanche Energy


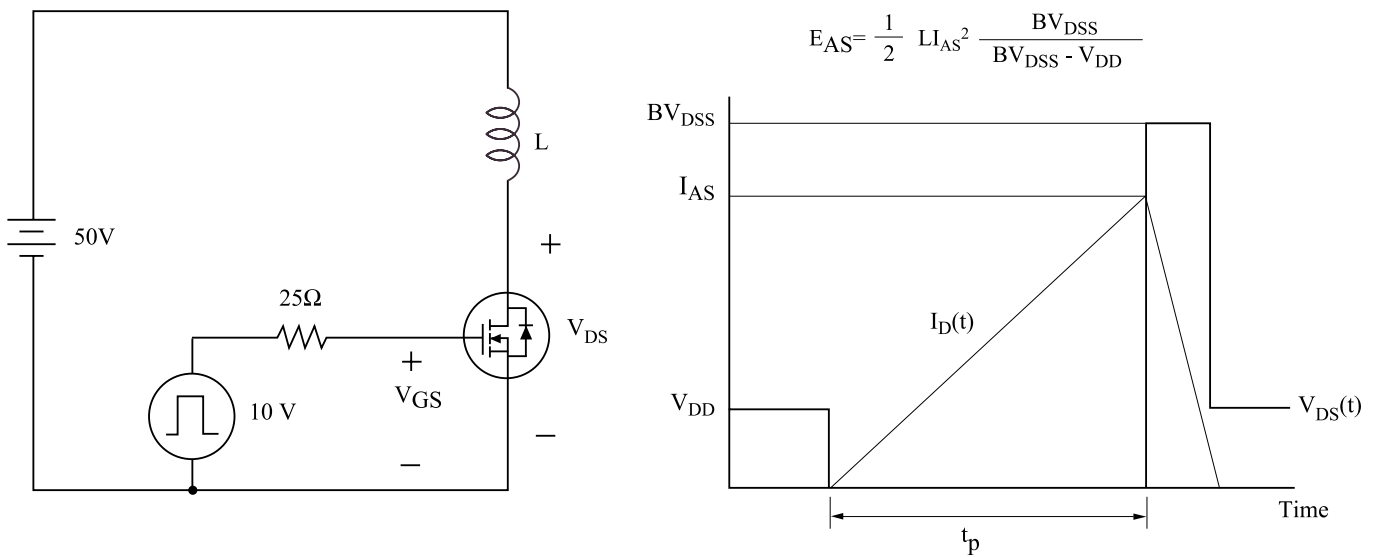


Fig14. Resistive Load Switching



KF5N50FZA/FSA

Fig15. Source - Drain Diode Reverse Recovery and dv/dt

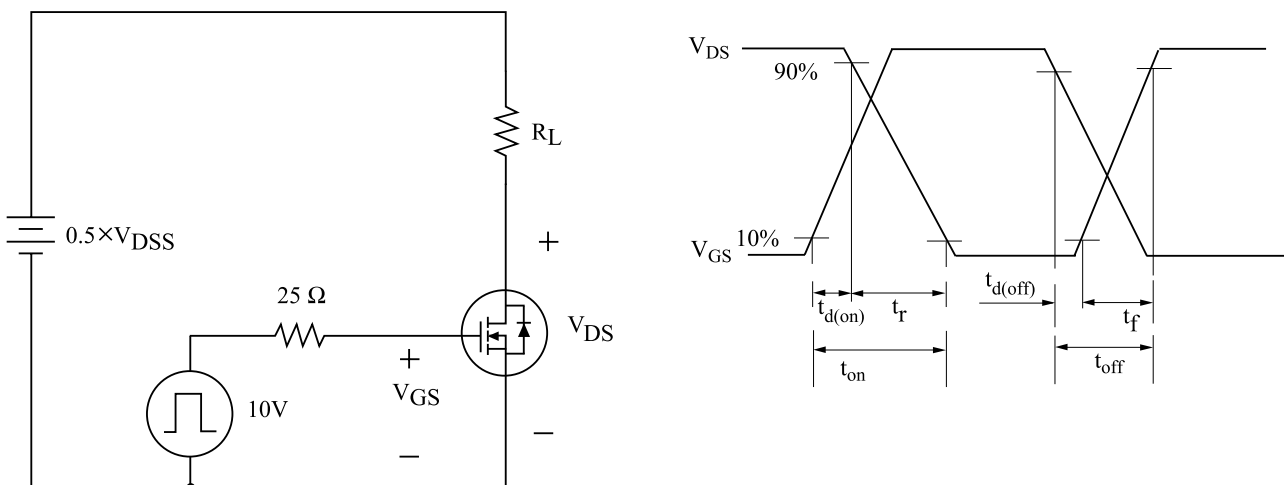