

FEATURES

- Input Voltage Range of 100 to 240VAC
- USB or Strain Relief Types
- Meets CEC Level VI (DoE)
- RoHS Compliance
- UK, USA, or EU Plug Type
- Over Voltage, Short Circuit, and Over Current Protection
- Vertical or Horizontal Package Available
- UL/cUL, UL60601, CB 60601, CE, and FCC Safety Approvals

DESCRIPTION

The WMEM1005 series of AC/DC medical wall mount power supplies offers up to 6 watts of output power in a horizontal or vertical case. This series consists of single output models with an input voltage range of 100 to 240VAC. Several options are available for this series; horizontal or vertical case type, USB or Strain Relief output type, and either UK, USA, or EU plug type. Each model in this series is RoHS and CEC Level VI compliant and has over voltage, short circuit, and over current protection. This series has UL/cUL, UL60601, CB 60601, CE, and FCC safety approvals. Please call factory for order details.

MODEL SELECTION TABLE

Vertical Case

Model Number ⁽¹⁾	Input Voltage Range	Output Voltage	Output Current		Ripple & Noise	Output Power	Plug Type
			Min Load	Max Load			
WMEM1005AVUx	100~240VAC	5~8	0A	1.2A	100mV	6W	US
WMEM1005AVEEx							EU
WMEM1005AVKx							UK
WMEM1005BVUx	100~240VAC	9~12	0A	0.66A	180mV	6W	US
WMEM1005BVEEx							EU
WMEM1005BVKx							UK
WMEM1005CVUx	100~240VAC	9V	0A	0.5A	180mV	4.5W	US
WMEM1005CVEEx							EU
WMEM1005CVKx							UK
WMEM1005DVUx	100~240VAC	9V	0A	0.67A	180mV	6W	US
WMEM1005DVEEx							EU
WMEM1005DVKx							UK

MODEL SELECTION TABLE

Horizontal Case⁽²⁾

Model Number ⁽¹⁾	Input Voltage Range	Output Voltage	Output Current		Ripple & Noise ⁽³⁾	Output Power	Plug Type
			Min Load	Max Load			
WMEM1005AHUx	100~240VAC	5~8	0A	1.2A	100mV	6W	US
WMEM1005AHEEx							EU
WMEM1005BHUx	100~240VAC	9~12	0A	0.66A	180mV	6W	US
WMEM1005BHEEx							EU
WMEM1005CHUx	100~240VAC	9V	0A	0.5A	180mV	4.5W	US
WMEM1005CHEEx							EU
WMEM1005DHUx	100~240VAC	9V	0A	0.67A	180mV	6W	US
WMEM1005DHEEx							EU

SPECIFICATIONS

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
We reserve the right to change specifications based on technological advances.


SPECIFICATION	TEST CONDITIONS		Min	Typ	Max	Unit
INPUT SPECIFICATIONS						
Input Voltage Range			100		240	VAC
Input Frequency			50		60	Hz
Input Current			0.3		≤0.6	A
Inrush Current				≤60		A
OUTPUT SPECIFICATIONS						
Output Voltage			See Table			
Line Regulation				±1		%
Load Regulation ⁽⁴⁾				±5		%
Output Power			See Table			
Output Current			See Table			
Minimum Load			0			A
Ripple & Noise ⁽³⁾			See Table			
Hold-Up Time				≥8.3		mS
Temperature Coefficient				≤3		S
PROTECTION						
Short Circuit Protection			Automatic Recovery			
Over Current Protection			Automatic Recovery			
Over Voltage Protection			Automatic Recovery			
ENVIRONMENTAL SPECIFICATIONS						
Operating Temperature			0		40	°C
Storage Temperature			-20		85	°C
Operating Humidity			10		90	%
Storage Humidity			5		95	%
MTBF			100,000			Hours
GENERAL SPECIFICATIONS						
Efficiency			Meets CEC Level VI (DoE)			
PHYSICAL SPECIFICATIONS						
Weight			2.47oz (70g)			
Dimensions (L x W x H)	Horizontal Case	USB Output	2.19in x 1.46in x 1.07in (55.6mm x 37.15mm x 27.1mm)			
		Strain Relief	2.17in x 1.42in x 0.98in (55mm x 36.15mm x 25mm)			
	Vertical Case	USA, EU Plug	1.61in x 1.16in x 2.10in (41mm x 29.4mm x 53.46mm)			
		UK Plug	1.61in x 1.37in x 2.10in (41mm x 34.77mm x 53.46mm)			
SAFETY CHARACTERISTICS						
Safety Approvals			UL/cUL, UL60601, CB 60601, CE, FCC			

NOTES

1. "X" in model number indicates either a USB or Strain Relief output type. "X" is "U" for USB or "S" for Strain Relief.
2. Please note, only US and EU plugs are available for the horizontal case type.
3. Ripple & Noise is measured by using 20MHz bandwidth limited oscilloscope and terminated each output with a 0.1uF ceramic capacitor & parallel with 47uF aluminum capacitor at full load and nominal line.
4. Line regulation is defined by changing ±10% of input voltage from nominal line at rated load.

**Due to advances in technology, specifications subject to change without notice.*

MECHANICAL DRAWINGS

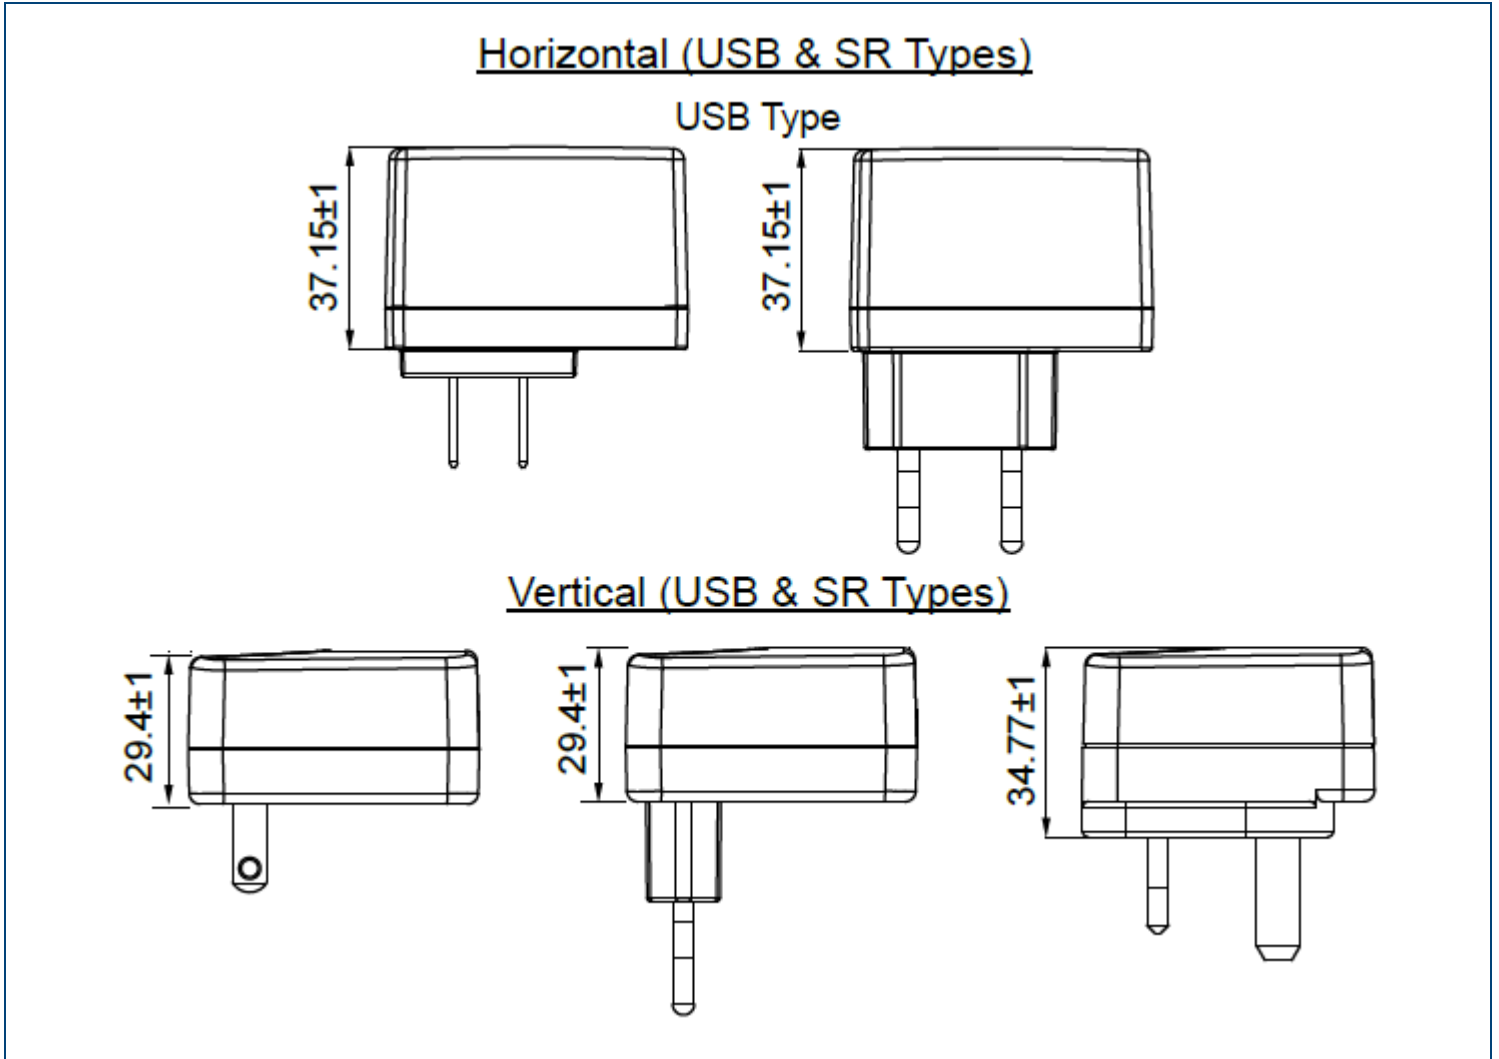

MODEL NUMBER SETUP

WMEM1005	A	V	U	S
Series Name	Input Voltage	Case Direction	Plug	Output Type
	A: 5~8V B: 9~12V C: 9V D: 9V	V: Vertical H: Horizontal	U: US Plug E: EU Plug K: UK Plug U: US Plug E: EU Plug	S: Strain Relief U: USB

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001-2008 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎ (603)778-2300
Toll Free: ☎ (888)597-9255
Fax: ☎ (603)778-9797
E-mail: sales@wallindustries.com
Web: www.wallindustries.com
Address: 37 Industrial Drive
Exeter, NH 03833