

# Crystal Clock Oscillator

## NZ2520SH

## Standard Type

### Application

For Automotive navigation system, Automotive audio equipment and Camera  
 For Smartphone, Tablet computers, Notebook PC, PC card, etc.  
 For Audioequipment and Wireless module  
 For Communication equipment for SDH/SONET, WiMAX, LTE, etc. and Base station

### Features

- Supports a wide temperature range from  $-40$  to  $+125^{\circ}\text{C}$ .
- Compact and light. Dimensions :  $2.5 \times 2.0 \times 0.9$  mm, weight : 0.02 g.
- This crystal clock oscillator can support low frequencies (from 1.5MHz) not easily achieved with crystal units of the same size.
- Supports a wide frequency range (80 to 170MHz).
- Taped units enable automatic mounting IR Reflow (lead free) is possible.
- Lead-free.
- Conforms to AEC-Q100/200.



Pb Free

RoHS Compliant  
Directive 2011/65/EU


Absolute maximum rating  
 Supply Voltage ( $V_{CC}$ )  $-0.3$  to  $+4.0$  V  
 Storage Temperature Range  $-55$  to  $+125^{\circ}\text{C}$

### Specifications

Item		Model	NZ2520SH	
Output Specification			CMOS	
Nominal Frequency Range		(MHz)	$1.5 \leq F \leq 80$	$80 < F \leq 170$ (*1)
Overall Frequency Tolerance		( $\times 10^{-6}$ )	$\pm 100$ to $\pm 20$ (*2)	
Operating Temperature Range		( $^{\circ}\text{C}$ )	$[-40$ to $+125]$ to $[-10$ to $+60]$ (*2)	
Supply Voltage		(V)	$+1.8$ to $+3.3$ (*1)	
Current Consumption Max.	During Operation	$+25^{\circ}\text{C}$	(mA)	2.5 to 9.0
	During Standby	$+25^{\circ}\text{C}$	( $\mu\text{A}$ )	9.5 to 38.0
V <sub>OL</sub> Max. / V <sub>OH</sub> Min.		(V)	20	
Tr Max. / Tf Max.	$+1.8$ V $+2.5$ to $+3.3$ V	(ns)	0.1 V <sub>CC</sub> / 0.9 V <sub>CC</sub>	
			0.2 V <sub>CC</sub> / 0.8 V <sub>CC</sub>	
Symmetry Min. to Max.		(%)	6 / 6 ( at 0.1 V <sub>CC</sub> to 0.9 V <sub>CC</sub> ) 5 / 5 ( at 0.1 V <sub>CC</sub> to 0.9 V <sub>CC</sub> )	
Load (C <sub>L</sub> ) Max.		(pF)	45 to 55	
Start-up Time Max.		(ms)	15	
Standby function			4	
			Available (Three-state)	

\*1. Supply Voltage :  $+2.5$  to  $+3.3$ V (131 to 170MHz)

### Dimensions

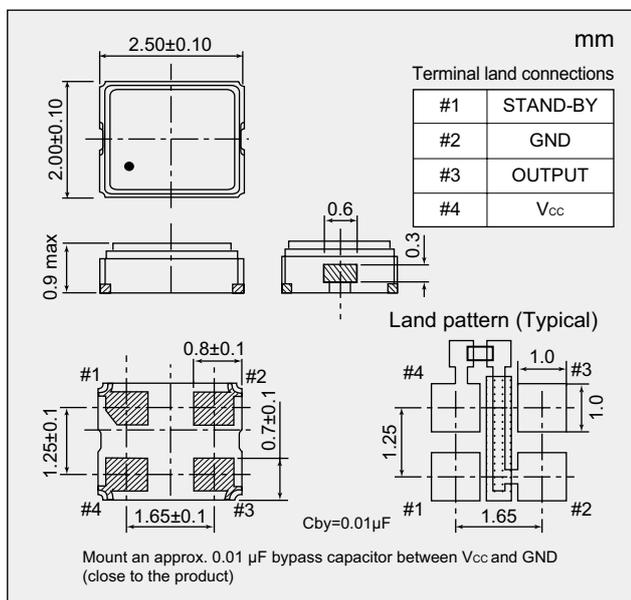

### Standby Function

#1 Input	#3 Output
Level H ( $0.7 V_{CC} \leq V_{IH} \leq V_{CC}$ ) or OPEN is selected.	Oscillation output ON
Level L ( $V_{IL} \leq 0.3 V_{CC}$ ) is selected.	High impedance


# Crystal Clock Oscillator

## NZ2520SH


Standard Type

### Output Waveform <CMOS>

Frequency Range :  $1.5 \leq F \leq 80\text{MHz}$

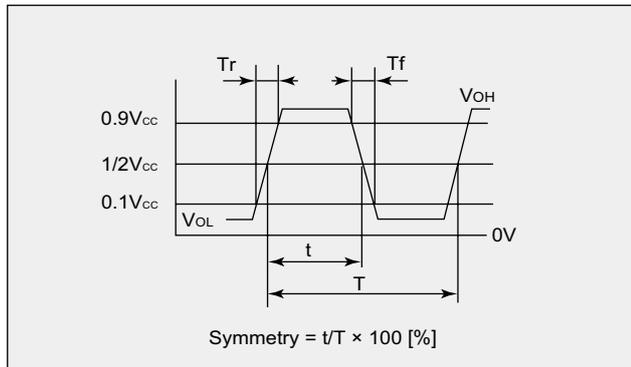

Frequency Range :  $80 < F \leq 170\text{MHz}$

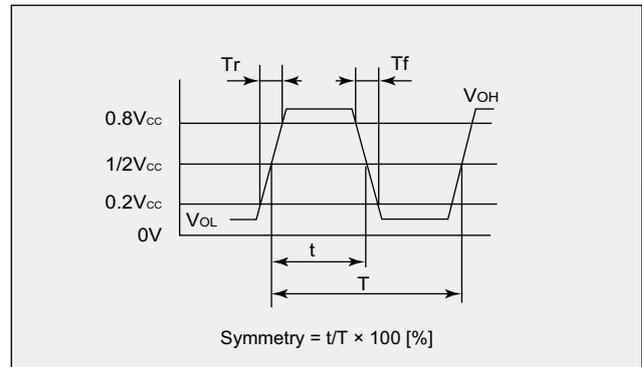

### Specification Number

Frequency Range :  $1.5 \leq F \leq 80\text{MHz}$

(*2) Overall Frequency Tolerance	(*2) Operating Temperature Range (°C)	Supply Voltage (V)			
		+1.8±0.18	+2.5±0.25	+3.0±0.3	+3.3±0.33
±100×10 <sup>-6</sup>	-40 to +125	NSA3579A	NSA3579B	NSA3579C	NSA3579D
±50×10 <sup>-6</sup>	-40 to +105	NSC5004A	NSC5004B	NSC5004C	NSC5004D
±50×10 <sup>-6</sup>	-40 to +85	NSC5005A	NSC5005B	NSC5005C	NSC5005D
±30×10 <sup>-6</sup>	-10 to +70	NSC5007A	NSC5007B	NSC5007C	NSC5007D
±20×10 <sup>-6</sup>	-10 to +60	NSC5008A	NSC5008B	NSC5008C	NSC5008D

Frequency Range :  $80 < F \leq 170\text{MHz}$

(*2) Overall Frequency Tolerance	(*2) Operating Temperature Range (°C)	Supply Voltage (V)			
		+1.8±0.18	+2.5±0.25	+3.0±0.3	+3.3±0.33
±100×10 <sup>-6</sup>	-40 to +125	NSC5171A	NSC5171B	NSC5171C	NSC5171D
±50×10 <sup>-6</sup>	-40 to +105	NSC5172A	NSC5172B	NSC5172C	NSC5172D
±50×10 <sup>-6</sup>	-40 to +85	NSC5009A	NSC5009B	NSC5009C	NSC5009D
±30×10 <sup>-6</sup>	-10 to +70	NSC5011A	NSC5011B	NSC5011C	NSC5011D
±20×10 <sup>-6</sup>	-10 to +60	NSC5012A	NSC5012B	NSC5012C	NSC5012D

Please specify the model name, frequency, and specification number when you order products.  
For further questions regarding specifications, please feel free to contact us.