


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/03/10	

APPROVED: _____
 DATE: _____ TITLE: _____

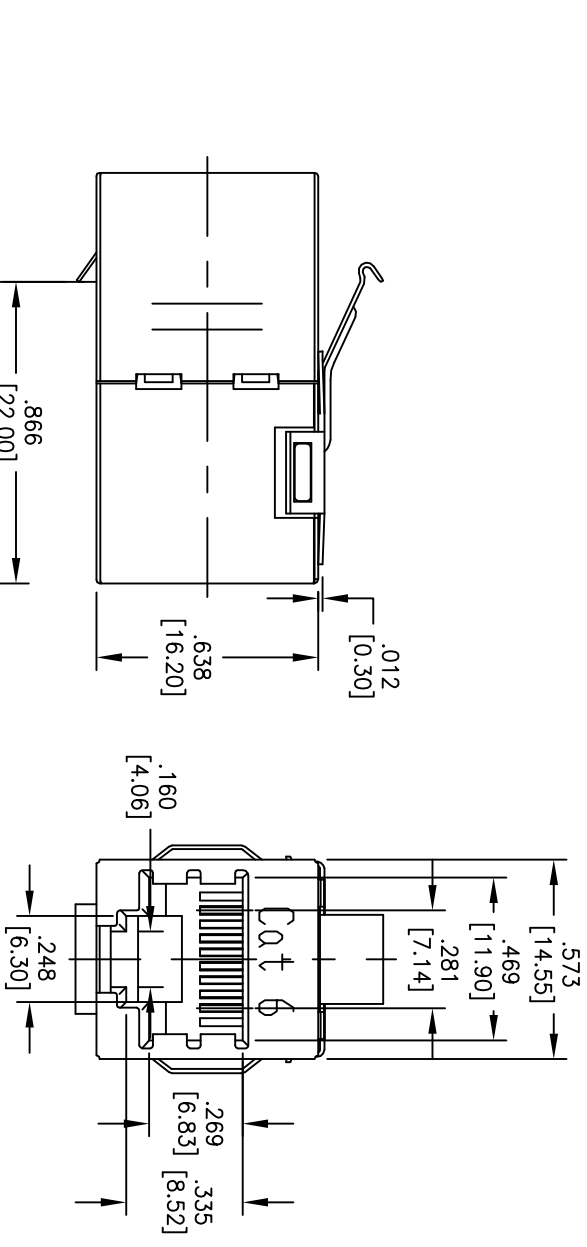

X	PLATING
0	15 uin Gold
1	30 uin Gold
2	50 uin Gold

B SPECIFICATIONS:
 Material:
 Insulator: ABS, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Shield: Stainless Steel
 Plating:
 Gold over Nickel underplate on contact area,
 Tin over Copper underplate between contact areas.
 (See Chart for Thickness)

A Electrical:
 Operating voltage: 125 VAC max.
 Current rating: 1.5 Amps max.
 Contact resistance: 20 Mohms max.
 Insulation resistance: 1000 Mohms min. @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -55°C to +85°C
 Environmenta:
 Leade free, RoHS Compliant

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

MODULAR COUPLER, 8P8C TO 8P8C
 FULLY SHIELDED, CAT6

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
X ± .10	Ø X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN DY	2/03/10
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	MTJ-C-88XB-S-CAT6	-
REF: S00005C	SCALE: NTS	SHEET 1 OF 1

