

isc N-Channel MOSFET Transistor

IRFB3004,IIRFB3004

• FEATURES

- Static drain-source on-resistance:
 $R_{DS(on)} \leq 1.75\text{m}\Omega$
- Enhancement mode
- Fast Switching Speed
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

• APPLICATIONS



- High Efficiency Synchronous Rectification in SMPS
- Uninterruptible Power Supply
- Hard Switched and High Frequency Circuits

• ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	40	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current-Continuous	340	A
I_{DM}	Drain Current-Single Pulsed	1310	A
P_D	Total Dissipation @ $T_c=25^\circ\text{C}$	380	W
T_j	Max. Operating Junction Temperature	175	$^\circ\text{C}$
T_{stg}	Storage Temperature	-55~175	$^\circ\text{C}$

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th(ch-c)}$	Channel-to-case thermal resistance	0.4	$^\circ\text{C}/\text{W}$
$R_{th(ch-a)}$	Channel-to-ambient thermal resistance	62	$^\circ\text{C}/\text{W}$

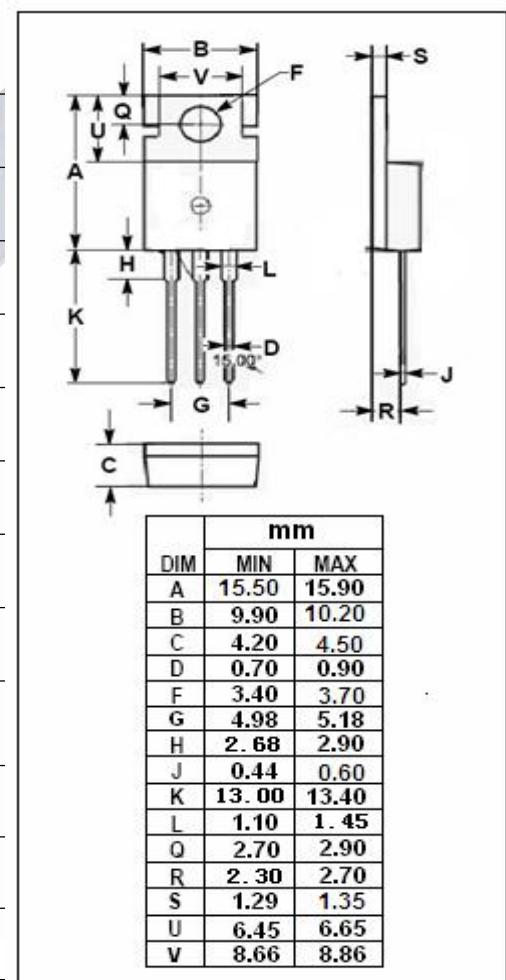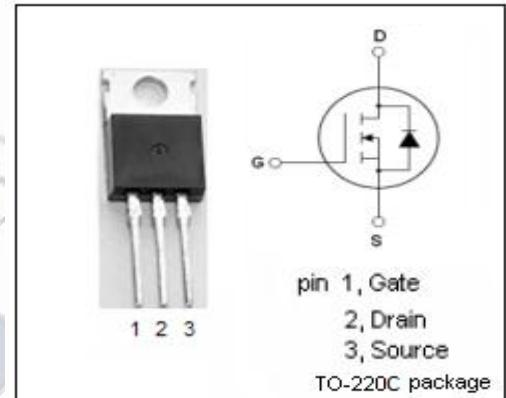

isc N-Channel MOSFET Transistor**IRFB3004,IIRFB3004****ELECTRICAL CHARACTERISTICS** $T_c=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV_{DSS}	Drain-Source Breakdown Voltage	$\text{V}_{\text{GS}}=0\text{V}; \text{I}_D = 250\mu\text{A}$	40			V
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	$\text{V}_{\text{DS}}=\text{V}_{\text{GS}}; \text{I}_D=250 \mu \text{A}$	2		4	V
$\text{R}_{\text{DS(on)}}$	Drain-Source On-Resistance	$\text{V}_{\text{GS}}=10\text{V}; \text{I}_D=195\text{A}$			3.0	$\text{m}\Omega$
I_{GSS}	Gate-Source Leakage Current	$\text{V}_{\text{GS}}=\pm 20\text{V}$			± 100	nA
I_{DSS}	Drain-Source Leakage Current	$\text{V}_{\text{DS}}=40\text{V}; \text{V}_{\text{GS}}= 0\text{V}$			20	μA
V_{SD}	Diode forward voltage	$\text{I}_S = 195\text{A}, \text{V}_{\text{GS}} = 0 \text{ V}$			1.3	V