


XFMRS, Inc.

SPECIFICATION FOR APPROVAL

XFMRS P/N : XFEB463024-600-2 Rev: A/2

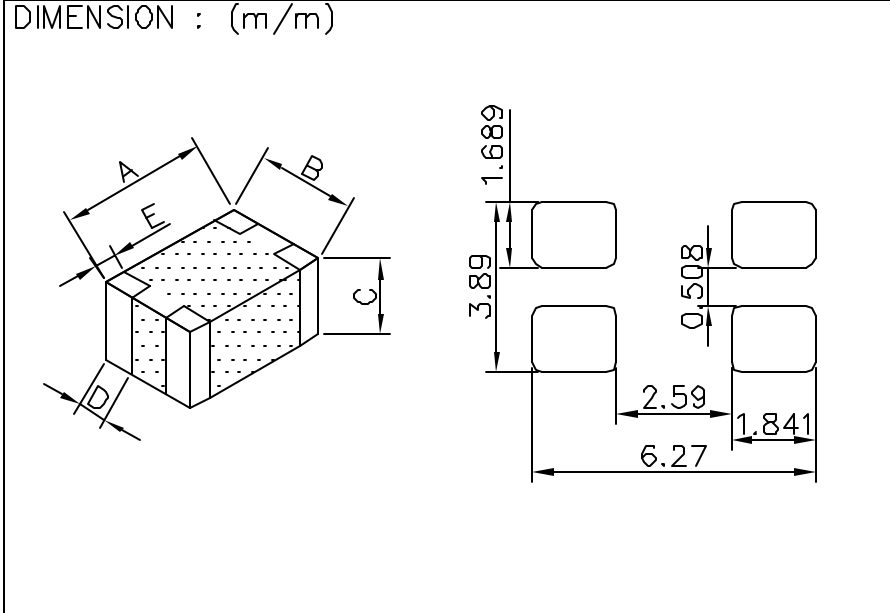

A	4.57±0.25	m/m
B	3.05±0.25	m/m
C	2.36±0.25	m/m
D	1.14±0.13	m/m
E	0.58±0.18	m/m
F		m/m
G		m/m
H		m/m
I		m/m
J		m/m
K		m/m
L		m/m
M		m/m
N		m/m
O		m/m

ELECTRICAL REQUIREMENTS

Z	45-75 Ohms	TEST FREQ.	100	MHz
Rdc	0.005 Ohms Max	TEST FREQ.		MHz
Idc	5000mA Max	TEST FREQ.		MHz

TEST INSTRUMENTS

- HP 34401A MULTIMETER
- HP 4195 NETWORKS/SPECTRUM ANALYZER
- HP 42841 BIAS CURRENT SOURCE
- HP 4285A LCR METER
- HP 4286A RF LCR METER
- HP 4991A RF IMPEDANCE / MATERIAL ANALYZER
- HP 6632A DC POWER SUPPLY

- Notes:**
1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
 2. Flammability: UL94V-0
 3. ASTM oxygen index: > 28%
 4. Insulation System: Class F 155°C. UL file E151556
 5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +105°C
 6. Storage Temperature Range: -55°C to +125°C
 7. Aqueous wash compatible
 8. SMD Lead Coplanarity: ±0.004*(0.102mm)
 9. Electrical and mechanical specifications 100% tested
 10. RoHS Compliant Component

DRAWN BY :
Juan Mao
Aug-21-08

CHECKED BY :
YK Liao
Aug-21-08

APPROVED BY :
Joe Huff
Aug-21-08

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.