



SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
OPEN	1-2

(ON) = MOMENTARY

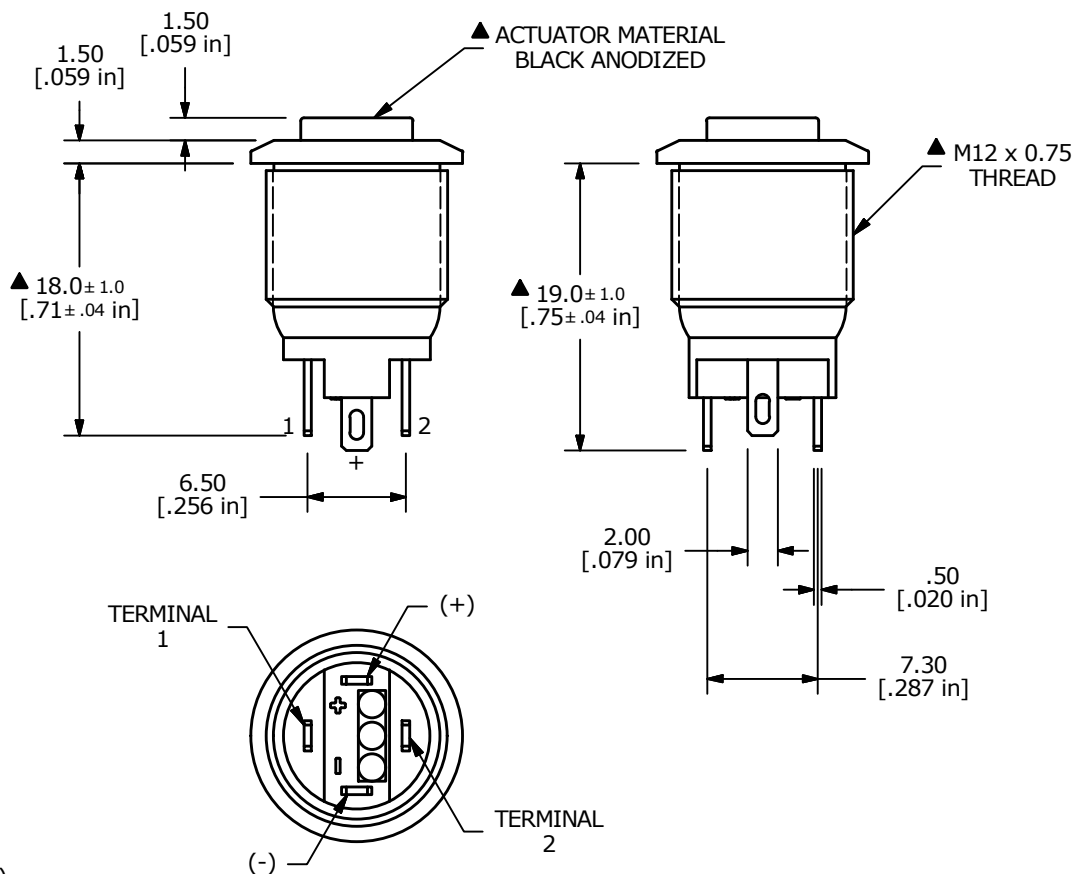

- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
 3. TERMINAL NOS. FOR REF. ONLY
 4. RATING: 2A @ 36VDC
 5. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
 6. INSULATION RESISTANCE: 1,000MΩ @ 500VDC
 7. DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
 8. ELECTRICAL LIFE: 200,000 CYCLES
 9. CONTACT MATERIAL: SILVER
 10. OPERATING TEMPERATURE: -20°C TO 55°C
 - ▲ 11. INGRESS PROTECTION: IP65
 - ▲ 12. LED VOLTAGE: BASE VOLTAGE 2.8V TYP.
 13. ▲ DENOTES CRITICAL PARAMETER
 14. 2011/65/EU (ROHS) COMPLIANT
 15. HARDWARE INCLUDED: HEX NUT AND O-RING (NOT SHOWN)



C	23191	UPDTEd THREAD FROM ..0.5 to 1.75	1/29/18	MJR
B	22865	UPDATED NOTES	5/26/17	MJR
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE PV0H24011-301				
SCALE 2:1	DATE 10/28/2016	DR MJR	DWG 52-PV0H24011301	REV C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED