

# Supercapacitors

## HB Series




### Description

Cooper Bussmann PowerStor supercapacitors are unique, ultra-high capacitance devices utilizing electrochemical double layer capacitor (EDLC) construction combined with new, high performance materials. This combination of advanced technologies allows Cooper Bussmann to offer a wide variety of capacitor solutions tailored to specific applications that range from a few micro-amps for several days to several amps for milliseconds.

### Features & Benefits

- Ultra low ESR for high power density
- Large capacitance for high energy density
- UL Recognized

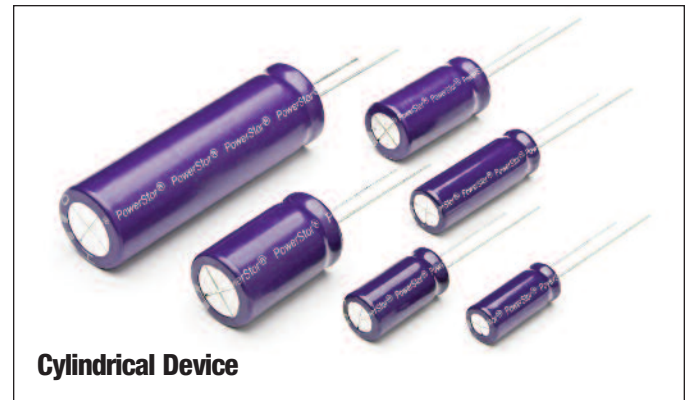

### Specifications

Working Voltage	2.5V
Surge Voltage	3.0V
Capacitance	3.0F to 110F
Capacitance Tolerance	-10% to +30% (20°C)
Operating Temperature Range	-25°C to 70°C
Extended Operating Temperature Range	-25°C to 85°C (with linear voltage derating to 2.1V @ 85°C)

### Standard Product


Capacitance (F)	Part Number	Maximum ESR ( $\Omega$ ) (Equivalent Series Resistance) Measured @		Nominal Leakage Current ( $\mu$ A) After 72 Hrs. @ 20°C	Nominal Dimensions (mm)		Typical Mass (grams/piece)
		1kHz	100Hz		Diameter	Length	
3	HB0820-2R5305-R	0.155	0.160	7	8	20	1.5
5	HB1020-2R5505-R	0.095	0.100	11	10	20.5	2.4
6	HB0830-2R5605-R	0.095	0.100	11	8	30	2.4
10	HB1030-2R5106-R	0.060	0.060	20	10	30	3.5
15	HB1325-2R5156-R	0.045	0.050	22	13	26	4.8
25	HB1625-2R5256-R	0.036	0.040	28	16	25	8.2
35	HB1635-2R5356-R	0.028	0.030	32	16	35	9.8
60	HB1840-2R5606-R	0.023	0.025	47	18	40	13.8
110	HB1860-2R5117-R	0.018	0.020	180	18	60	22

### Performance

Parameter	Capacitance Change (% of initial value)	ESR (% of maximum specified value)
Life (1000 hrs @ 70°C @ 2.5Vdc)	$\leq 30\%$	$\leq 200\%$
Storage - Low and High Temperature (1000 hrs @ -25°C and 85°C)	$\leq 30\%$	$\leq 200\%$

Dimensions (mm)								
Part Number	D	D'	L	L'	F	d'	C	C'
HB0820-2R5305-R	8.0	8.5	20.5	21.0	3.5	0.50	20.0	5.0
HB1020-2R5505-R	10.0	10.5	21.8	22.3	5.0	0.60	20.0	5.0
HB0830-2R5605-R	8.0	8.5	30.5	31.0	3.5	0.50	20.0	5.0
HB1030-2R5106-R	10.0	10.5	31.0	31.5	5.0	0.60	20.0	5.0
HB1325-2R5156-R	13.0	13.5	27.9	28.4	5.0	0.60	20.0	5.0
HB1625-2R5256-R	16.0	16.5	27.9	28.4	7.5	0.80	20.0	5.0
HB1635-2R5356-R	16.0	16.5	37.5	38.0	7.5	0.80	20.0	5.0
HB1840-2R5606-R	18.0	18.5	41.5	42.0	7.5	0.80	20.0	5.0
HB1860-2R5117-R	18.0	18.5	59.5	60.5	7.5	0.80	20.0	5.0
<b>Tolerances</b>	<b>Maximum</b>				<b>± 0.5</b>	<b>± 0.02</b>	<b>Minimum</b>	

Note: Longer lead is positive.

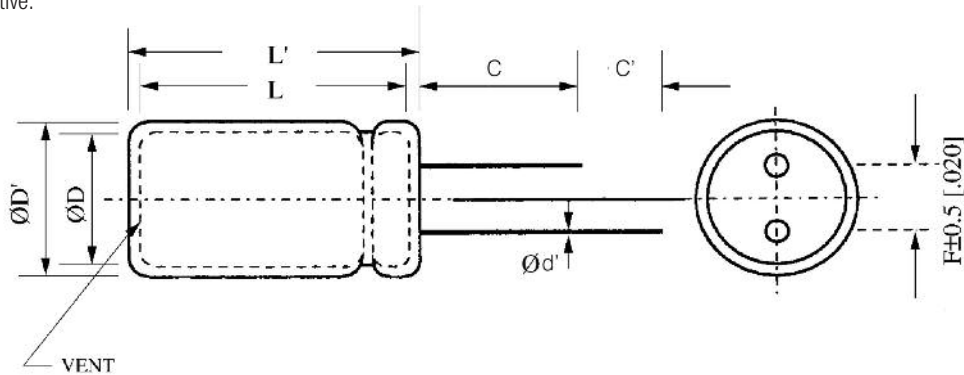

Part Numbering System							
HB				-	R		
Series Code	Dimensions (mm)				Voltage (V)	Capacitance (μF)	
HB Series	Diameter	Length			R is Decimal	Value	Multiplier
					2R5 = 2.5V	Example: 106 = 10 x 10 <sup>6</sup> μF or 10F	

### Packaging Information

**Packaging:**

- Standard packaging: Bulk, 100 units per bag.
- Larger bulk packages available on request.

### Part Marking

- Manufacturer
- Capacitance (F)
- Nominal Working Voltage (V)
- Series Code (or part number)
- Polarity

**North America**  
Cooper Bussmann  
1225 Broken Sound Parkway NW  
Suite F  
Boca Raton, FL 33487-3533  
Tel: 1-561-998-4100  
Fax: 1-561-241-6640  
Toll Free: 1-888-414-2645

Cooper Bussmann  
P.O. Box 14460  
St. Louis, MO 63178-4460  
Tel: 1-636-394-2877  
Fax: 1-636-527-1607

**Europe**  
Cooper Bussmann  
Cooper (UK) Limited  
Burton-on-the-Wolds  
Leicestershire • LE12 5TH UK  
Tel: +44 (0) 1509 882 737  
Fax: +44 (0) 1509 882 786

Cooper Bussmann  
Avda. Santa Eulalia, 290  
08223  
Terrassa, (Barcelona), Spain  
Tel: +34 937 362 812  
+34 937 362 813  
Fax: +34 937 362 719

**Asia Pacific**  
Cooper Bussmann  
1 Jalan Kilang Timor  
#06-01 Pacific Tech Centre  
Singapore 159303  
Tel: +65 278 6151  
Fax: +65 270 4160

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.