

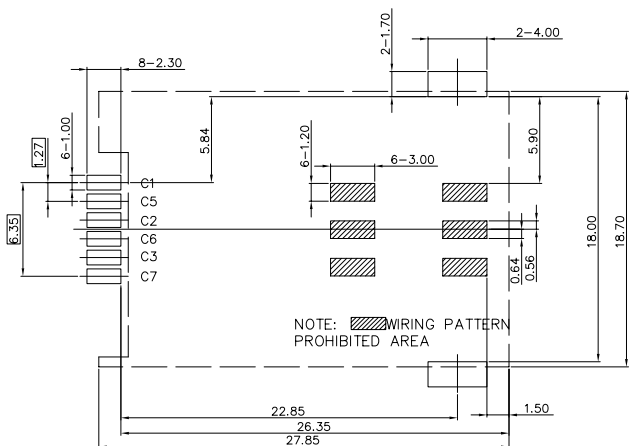
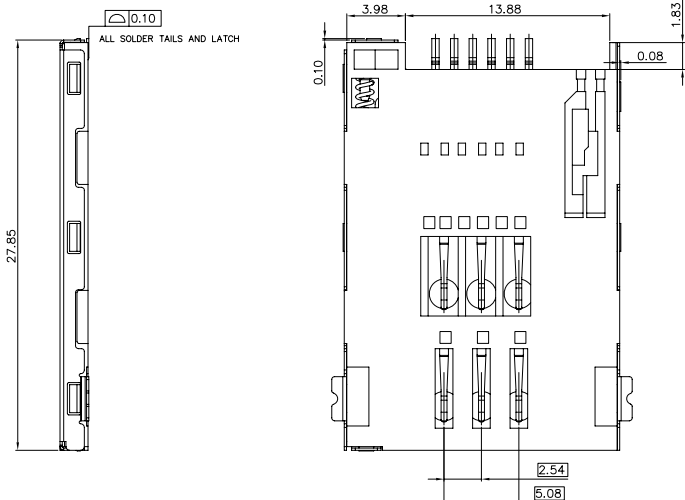
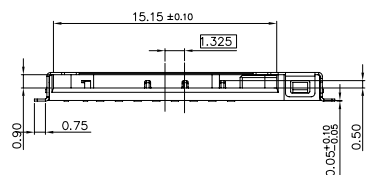
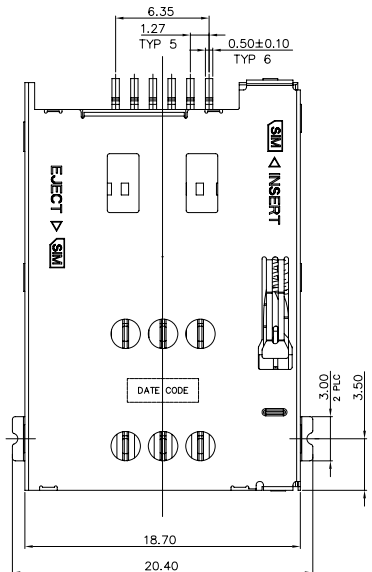


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		A版追従	03/20/07
B		修改圖面與實物相對	04/04/07
C	ES.00704.095	取消 LOGO 標示	04/14/07

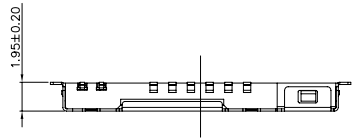


SIM pin assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved



NOTES:

- SPECIFICATIONS**
 INSULATION RESISTANCE: 500M min. AT DC 500V DC
 WITHSTANDING VOLTAGE: 250V ACrms FOR 1 MINUTE
 CONTACT RESISTANCE: 100MΩmax. AT 10MA/20mV max
 CURRENT RATING: 0.5A
 VOLTAGE RATING: 5.0 vrms
 OPERATING TEMP. RANGE: -55°C+85°C
 MATING CYCLES: 5000 INSERTIONS
- MATERIAL:**
 INSULATOR: H-TEMPERATURE PLASTIC, UL 94V-0, COLOR BLACK
 TERMINAL: COPPER ALLOY, T=0.15mm
 SWITCH: COPPER ALLOY, T=0.10mm
 SHELL: STAINLESS STEEL, T=0.15mm
- FINISH:**
 TERMINAL: 50u" min NICKEL UNDERPLATED ON ALLOVER, GOLD 15u" ON CONTACT AREA, 80u" min TIN ON SOLDER TAIL.
 SHELL: 50u" NICKEL UNDERPLATED ON ALLOVER, GOLD FLASH ON SOLDER LATCH

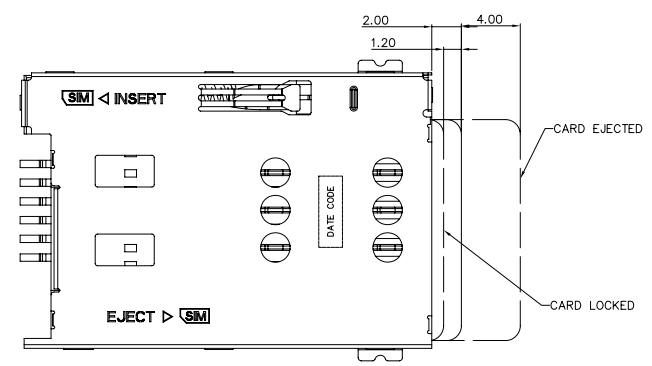

RECOMMENDED PCB LAYOUT

GENERAL TOLERANCE	TOLERANCE	FILE.NO.	101-00269	PART.NO.	101-00269-82	DRAWN	COCO	MATERIAL	SCALE	N/A	
X.±0.50	x. ± 5°	REV.	C	TITLE	SIM CARD READER 6PIN (PUSH/PUSH) W/O SWITCH	CHECKED		DATE	04/14/2007	UNIT	MM
.X±0.38	.x ± 2°	SIZE	A4	SHEET	1/1	APPROVED		Amphenol Shouh Min Industry			
.XX±0.25	.xx ± 1°										