

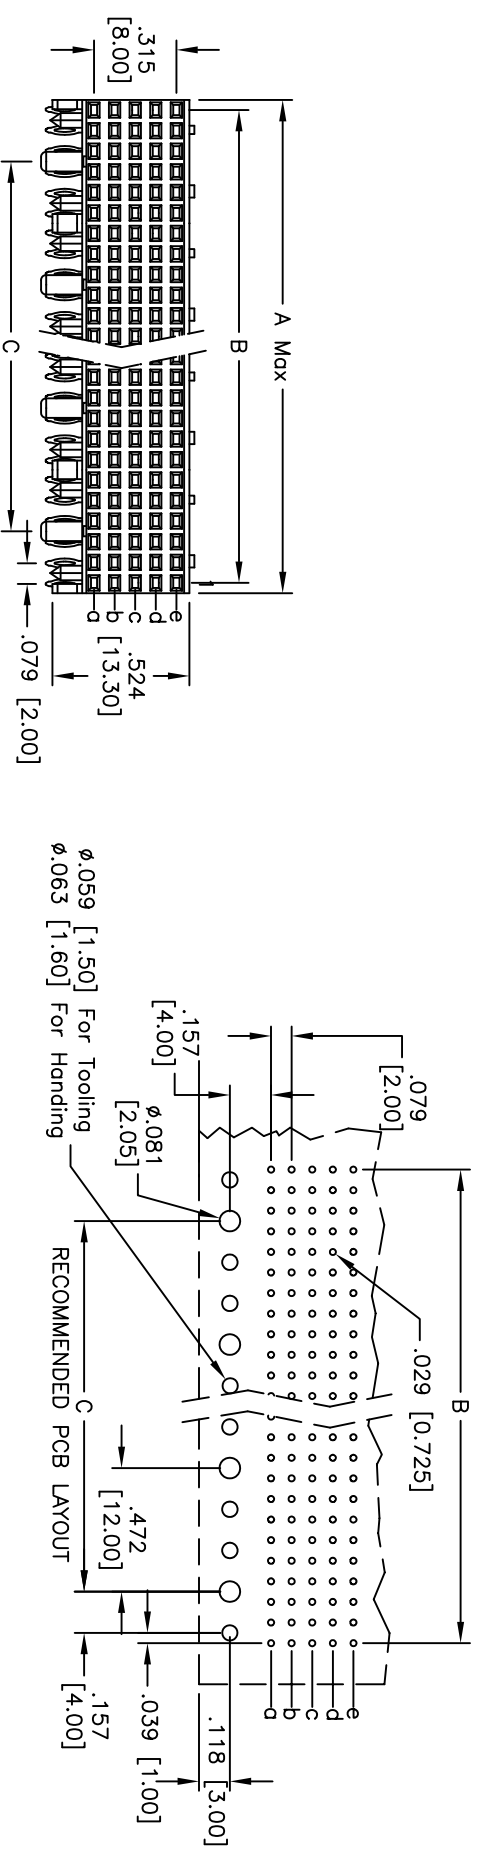


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/26/09	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

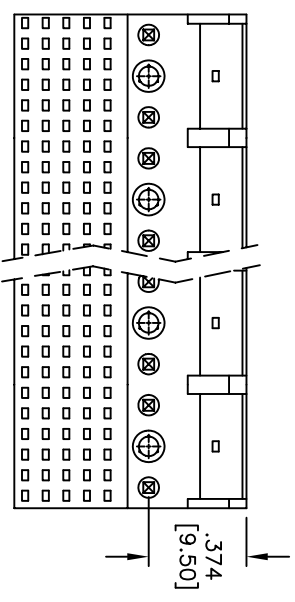

Position	A	B	C
30	.470 [11.95]	.394 [10.00]	-
60	.943 [23.95]	.866 [22.00]	.472 [12.00]
90	1.415 [35.95]	1.339 [34.00]	.945 [24.00]
120	1.888 [47.95]	1.811 [46.00]	1.417 [36.00]
150	2.360 [59.95]	2.283 [58.00]	1.890 [48.00]
180	2.833 [71.95]	2.756 [70.00]	2.362 [60.00]
210	3.305 [83.95]	3.228 [82.00]	2.835 [72.00]
240	3.778 [95.95]	3.701 [94.00]	3.307 [84.00]
270	4.250 [107.95]	4.173 [106.00]	3.780 [96.00]
300	4.722 [119.95]	4.646 [118.00]	4.252 [108.00]
330	5.195 [131.95]	5.118 [130.00]	4.724 [120.00]
360	5.667 [143.95]	5.591 [142.00]	5.197 [132.00]
390	6.140 [155.95]	6.063 [154.00]	5.669 [144.00]

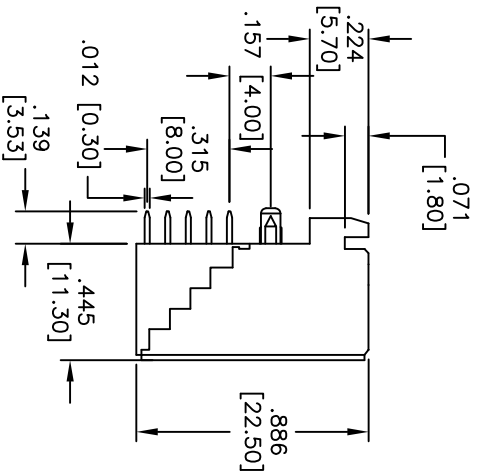

**SPECIFICATIONS:**

Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0  
 Insulator color: Beige  
 Contacts: Copper Alloy  
 Plating: Gold over Nickel underplate on contact area, Tin over Copper underplate on tails.

Electrical: Current rating: 1 Amp max  
 Contact resistance: 30 mohms max  
 Insulation resistance: 1000 Mohms min @ DC 500V  
 Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating: Operating temperature: -65°C to +125°C

Environmental: Lead free, RoHS compliant  
 Recommended soldering temp: 260°C for 5 seconds



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] FETURE BUS, SIGNAL,  
 FEMALE, RIGHT ANGLE, PRESS-FIT TYPE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	
.X	±.10
.XX	±.020
.XXX	±.015
.XXX	±.010
ØXX	±.10
ØXX	±.015
ØXXX	±.010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	
10/26/09	

SIZE	PART NO.	REV.
X	2FB-XX-F-3.53	-
REF: S0058T	SCALE: NTS	SHEET 1 OF 1