



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

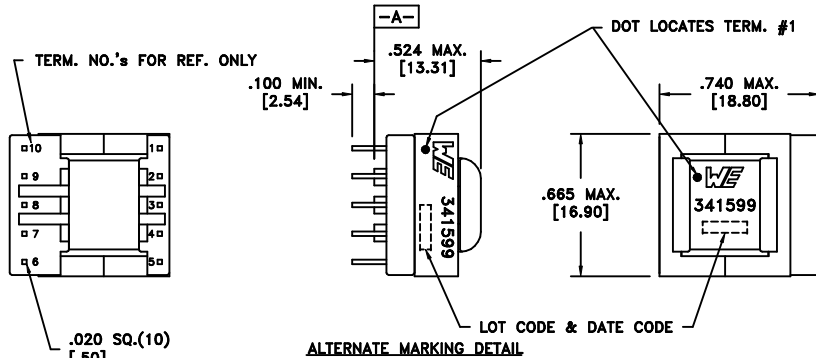

.020 SQ.(10) [50]  
PART MUST INSERT FULLY TO SURFACE A IN TRUE POSITION GRID

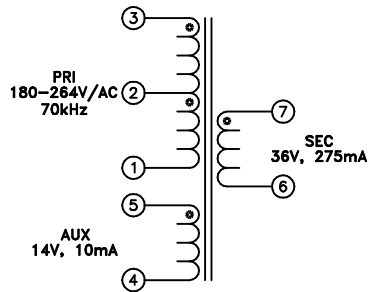

**ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:**

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	3-2 @20°C	2.385 ohms max.
D.C. RESISTANCE	2-1 @20°C	3.237 ohms max.
D.C. RESISTANCE	5-4 @20°C	0.486 ohms max.
D.C. RESISTANCE	7-6 @20°C	0.202 ohms max.
INDUCTANCE	3-1 70kHz, 100mVAC, Ls	2.18mH ±10%
LEAKAGE INDUCTANCE	3-1 tie(5+4, 7+6), 70kHz, 100mVAC, Ls	40.0uH max.
DIELECTRIC	3-6 tie(3+4), 3750VAC, 1 second	-
TURNS RATIO	(3-1):(5-4)	16.0:1, ±2%
TURNS RATIO	(3-1):(7-6)	6.2:1, ±2%

**GENERAL SPECIFICATIONS:**

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tray PKG-0887 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [1.3] Fractions: ±1/64 Footprint: ±.001 [0.3]	DRAWING TITLE TRANSFORMER	PART NO. 750341599
6A	1/13	SEE REVISION SHEET FOR REVISION LEVEL	CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750341599	compliant RoHS SPECIFICATION SHEET 1 OF 1