





- ▼ Simple Drive Requirement
- ▼ Lower On-resistance
- ▼ Fast Switching Characteristic
- ▼ RoHS Compliant & Halogen-Free



$BV_{DSS}$	75V
$R_{DS(ON)}$	8mΩ
$I_D$	80A



## Description

AP94T07 series are from Advanced Power innovative design and silicon process technology to achieve the lowest possible on-resistance and fast switching performance. It provides the designer with an extreme efficient device for use in a wide range of power applications.

The TO-263 package is widely preferred for all commercial-industrial surface mount applications using infrared reflow technique and suited for high current application due to the low connection resistance.

## Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	75	V
$V_{GS}$	Gate-Source Voltage	$\pm 20$	V
$I_D @ T_C = 25^\circ C$	Continuous Drain Current, $V_{GS} @ 10V^3$	80	A
$I_D @ T_C = 100^\circ C$	Continuous Drain Current, $V_{GS} @ 10V$	50.8	A
$I_{DM}$	Pulsed Drain Current <sup>1</sup>	300	A
$P_D @ T_C = 25^\circ C$	Total Power Dissipation	104	W
$P_D @ T_A = 25^\circ C$	Total Power Dissipation <sup>4</sup>	3.12	W
$T_{STG}$	Storage Temperature Range	-55 to 150	°C
$T_J$	Operating Junction Temperature Range	-55 to 150	°C

## Thermal Data

Symbol	Parameter	Value	Units
$R_{thj-c}$	Maximum Thermal Resistance, Junction-case	1.2	°C/W
$R_{thj-a}$	Maximum Thermal Resistance, Junction-ambient (PCB mount) <sup>4</sup>	40	°C/W



### Electrical Characteristics @ $T_j=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$ , $I_{\text{D}}=250\mu\text{A}$	75	-	-	V
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance <sup>2</sup>	$V_{\text{GS}}=10\text{V}$ , $I_{\text{D}}=40\text{A}$	-	-	8	$\text{m}\Omega$
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}$ , $I_{\text{D}}=250\mu\text{A}$	2	-	5	V
$g_{\text{fs}}$	Forward Transconductance	$V_{\text{DS}}=10\text{V}$ , $I_{\text{D}}=40\text{A}$	-	60	-	S
$I_{\text{DSS}}$	Drain-Source Leakage Current	$V_{\text{DS}}=60\text{V}$ , $V_{\text{GS}}=0\text{V}$	-	-	25	$\mu\text{A}$
$I_{\text{GSS}}$	Gate-Source Leakage	$V_{\text{GS}}=\pm 20\text{V}$ , $V_{\text{DS}}=0\text{V}$	-	-	$\pm 100$	$\text{nA}$
$Q_g$	Total Gate Charge	$I_{\text{D}}=40\text{A}$	-	60	96	$\text{nC}$
$Q_{\text{gs}}$	Gate-Source Charge	$V_{\text{DS}}=60\text{V}$	-	11	-	$\text{nC}$
$Q_{\text{gd}}$	Gate-Drain ("Miller") Charge	$V_{\text{GS}}=10\text{V}$	-	34	-	$\text{nC}$
$t_{\text{d(on)}}$	Turn-on Delay Time	$V_{\text{DS}}=40\text{V}$	-	19	-	ns
$t_r$	Rise Time	$I_{\text{D}}=40\text{A}$	-	100	-	ns
$t_{\text{d(off)}}$	Turn-off Delay Time	$R_G=1\Omega$	-	24	-	ns
$t_f$	Fall Time	$V_{\text{GS}}=10\text{V}$	-	13	-	ns
$C_{\text{iss}}$	Input Capacitance	$V_{\text{GS}}=0\text{V}$	-	2375	3800	$\text{pF}$
$C_{\text{oss}}$	Output Capacitance	$V_{\text{DS}}=25\text{V}$	-	400	-	$\text{pF}$
$C_{\text{rss}}$	Reverse Transfer Capacitance	$f=1.0\text{MHz}$	-	250	-	$\text{pF}$
$R_g$	Gate Resistance	$f=1.0\text{MHz}$	-	1.3	2.6	$\Omega$

### Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$V_{\text{SD}}$	Forward On Voltage <sup>2</sup>	$I_{\text{S}}=40\text{A}$ , $V_{\text{GS}}=0\text{V}$	-	-	1.3	V
$t_{\text{rr}}$	Reverse Recovery Time	$I_{\text{S}}=10\text{A}$ , $V_{\text{GS}}=0\text{V}$ ,	-	40	-	ns
$Q_{\text{rr}}$	Reverse Recovery Charge	$dI/dt=100\text{A}/\mu\text{s}$	-	60	-	$\text{nC}$

### Notes:

1. Pulse width limited by Max. junction temperature.
2. Pulse test
3. Package limitation current is 80A.
4. Surface mounted on 1 in<sup>2</sup> copper pad of FR4 board

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.

USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.

APEC DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

APEC RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN.

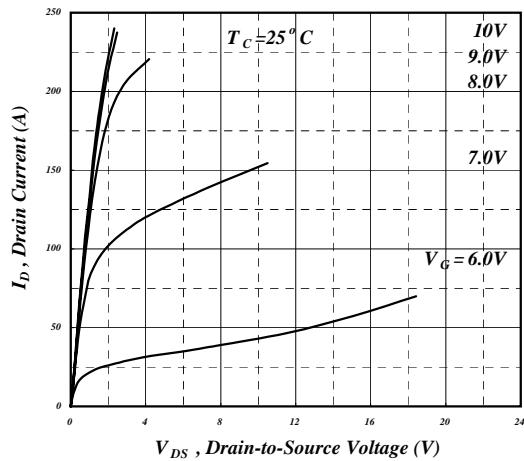


Fig 1. Typical Output Characteristics

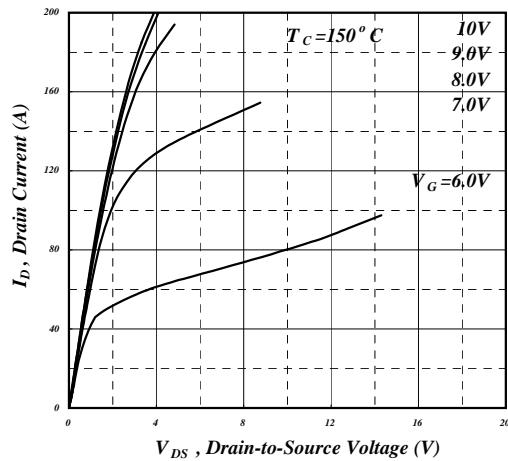


Fig 2. Typical Output Characteristics

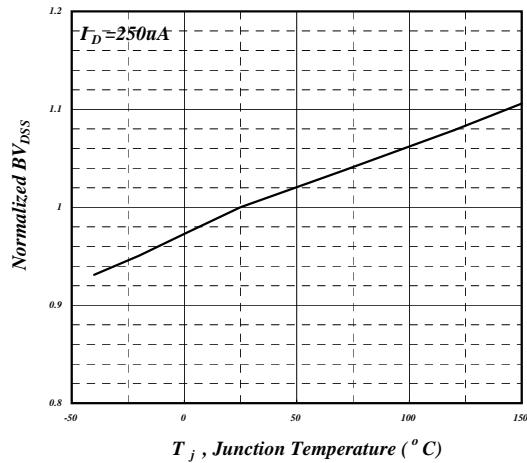
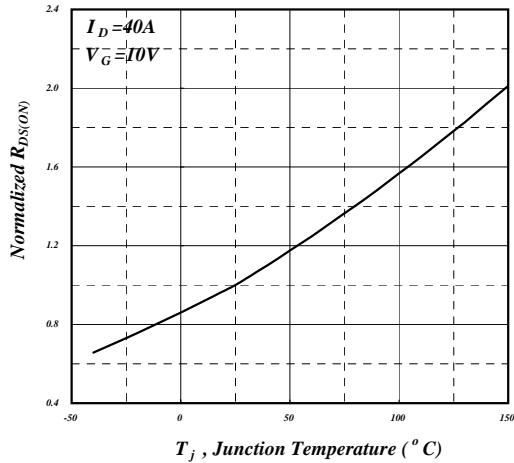
Fig 3. Normalized  $BV_{DSS}$  v.s. Junction Temperature

Fig 4. Normalized On-Resistance v.s. Junction Temperature

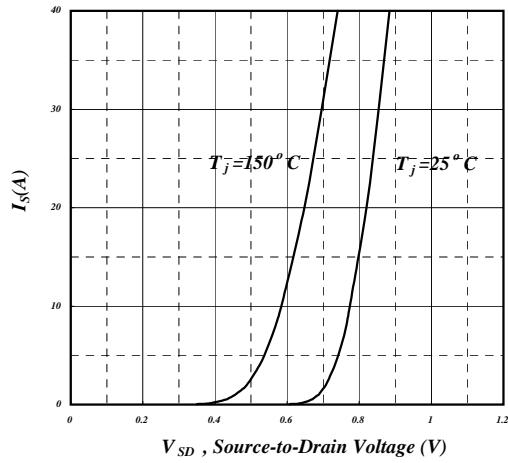


Fig 5. Forward Characteristic of Reverse Diode



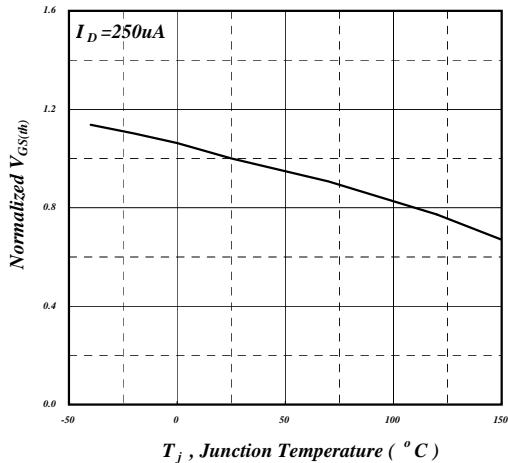


Fig 6. Gate Threshold Voltage v.s. Junction Temperature


AP94T07GS-HF

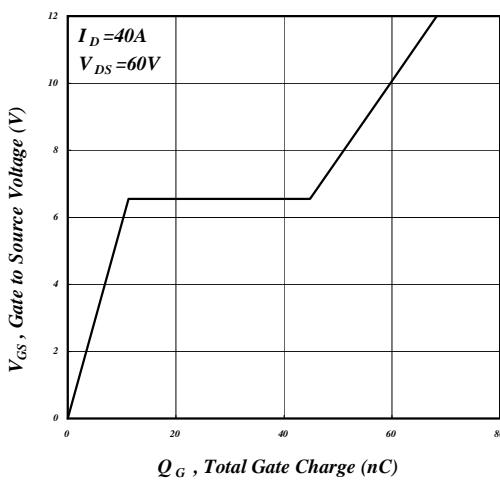


**Fig 7. Gate Charge Characteristics**

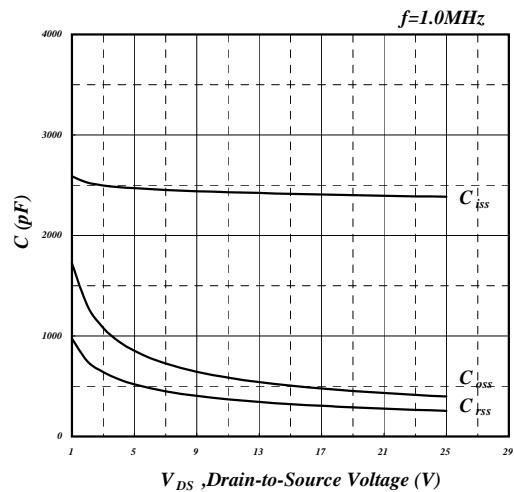


**Fig 8. Typical Capacitance Characteristics**

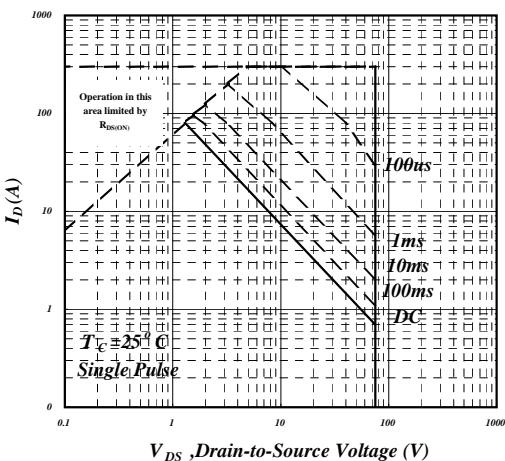


**Fig 9. Maximum Safe Operating Area**

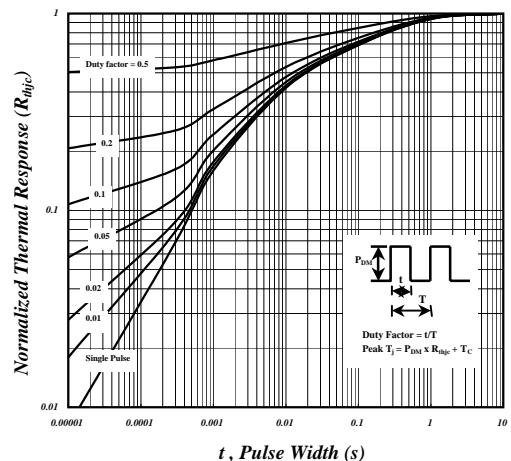

**Fig 10. Effective Transient Thermal Impedance**

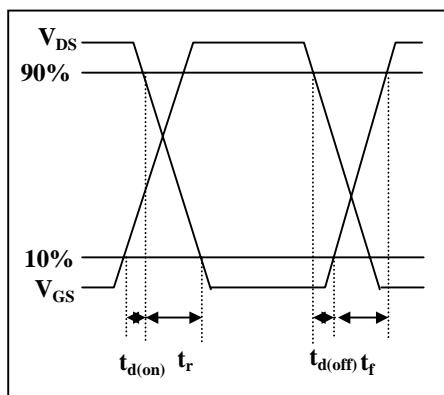

**Fig 11. Switching Time Waveform**

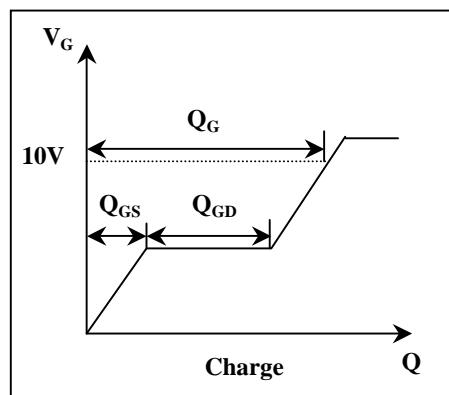

**Fig 12. Gate Charge Waveform**