


HIGH VOLTAGE APPLICATION
TV, MONITOR VERTICAL OUTPUT APPLICATION
DRIVER STAGE APPLICATION
COROR TV CLASS B SOUND OUTPUT APPLICATION

FEATURES

- High Breakdown Voltage : $V_{CE0} = -180V$ (Min.)
- High Transition Frequency : $f_T = 100MHz$ (Typ.)
- High Current : $I_{C(max)} = -2A$
- Complementary to KTD2061

MAXIMUM RATINGS ($T_a = 25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-200	V
Collector-Emitter Voltage	V_{CEO}	-180	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-2	A
Base Current	I_B	-0.2	A
Collector Power Dissipation ($T_C = 25^\circ C$)	P_C	20	W
Junction Temperature	T_j	150	$^\circ C$
Storage Temperature Range	T_{stg}	-55 ~ 150	$^\circ C$

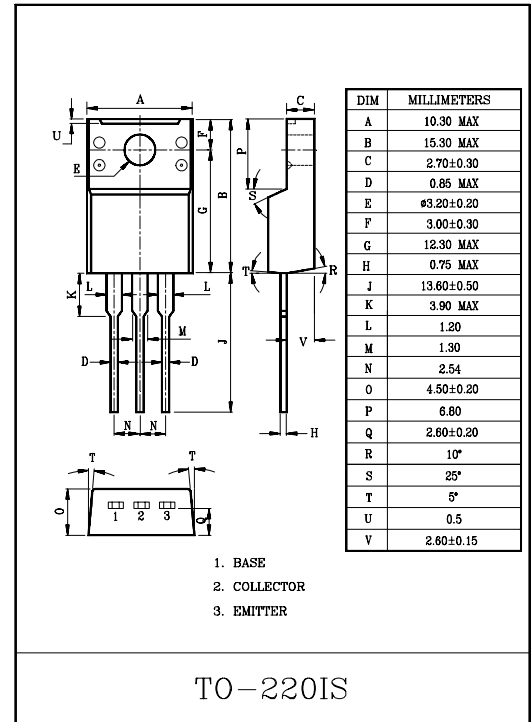

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ C$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB} = -200V, I_B = 0$	-	-	-1.0	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB} = -5V, I_C = 0$	-	-	-1.0	μA
Collector-Emitter Breakdown Voltage	V_{CEO}	$I_C = -10mA, I_B = 0$	-180	-	-	V
DC Current Gain	h_{FE}	$V_{CE} = -10V, I_C = -400mA$	70	-	240	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -500mA, I_B = -50mA$	-	-	-1.0	V
Base-Emitter Voltage	V_{BE}	$V_{CE} = -5V, I_C = -500mA$	-	-	-1.0	V
Transition Frequency	f_T	$V_{CE} = -10V, I_C = -400mA$	-	100	-	MHz

Note : h_{FE} Classification O:70~140 , Y:120~240

