Vishay Foil Resistors




Bulk Metal[®] Foil Technology 4 Pin Transistor Outline Hermetic Resistor Network



The four pin TO-18 package is the smallest available in the miniature hermetically sealed series of networks. It should be the first choice for simple networks requiring multiple R's. This network can contain up to 5, V5X5 resistor chips. Note that case grounding limits the circuit options to a two resistor divider. Review data sheet "7 Technical Reasons to Specify Bulk Metal® Foil Resistor Networks."

ORDERING INFORMATION - 1403 PARTS

Networks are built to your requirements. Send your schematic and electrical requirements to the Applications Engineering Department. (See data sheet "Network Worksheet.") A unique part number will be assigned which defines all aspects of your

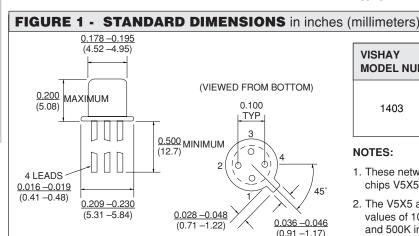


| VISHAY MODEL NUMBER | CHIP CAPACITY | MAXIMUM POWER RATING (WATTS) @ +70°C |
|------------------------|-----------------------------------------|-----------------------------------------|
| 1403 | V15X5 - 1 chip and V5X5 - 2 chips | 0.15 Watt |
| | V5X5 - 5 chips | |

NOTES:

- These networks utilize Vishay Bulk Metal[®] Foil resistor chips V5X5 and V15X5 or VTF15X10 Thin Film chips.
- 2. The V5X5 and V15X5 chips have maximum resistance values of 10K and 33K respectively in Bulk Metal[®] Foil and 500K in VTF15X5 Thin Film chips.

FIGURE 2 - SAMPLE CIRCUIT DESIGNS AND CHIP LAYOUTS

NOTE: Usable area is represented by the dotted lines— a cross 0.150 Inches x 0.150 Inches with arm widths of 0.050 Inches. Illustrations not to scale. Chips shown undersize for clarity. Drawing view is from the top looking down into the package.

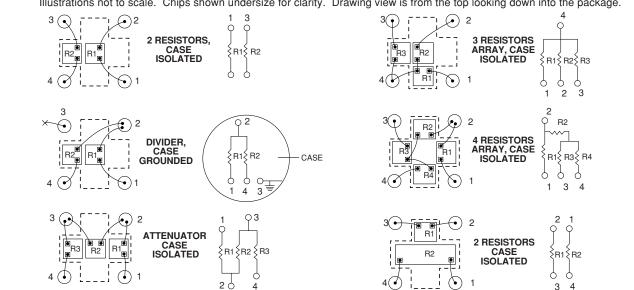

- VISHAY FOIL FRANCE +33 4 93 37 28 24 FAX: +33 4 93 37 27 31
 - GERMANY +49.9287.710 FAX: +49.9287.70435 ISBAEL +972.3.557.0945 FAX: +972.3.558.9121
- ITALY + 39 2 300 11919 FAX: +39 2 300 11999 • JAPAN +81.42.729.0661 FAX: +81.42.729.3400
- SINGAPORE +65.788.6668 FAX: +65.788.0988
- SWEDEN +46 8 594 70590 FAX: +46 8 594 70581
- UK +44 191 514 8237 FAX: +44 1953 457 722
- USA +1 610 407-4800 FAX: +1 610 640-9081