



MMBD4448TS

SURFACE MOUNT SWITCHING DIODES

VOLTAGE 100 Volts **POWER** 200mWatts


SOD-523 Unit: inch (mm)

FEATURES

- Fast switching Speed.
- Electrically Identical to Stander JEDEC
- High Conductance
- Surface Mount Package Ideally Suited for Automatic Insertion.
- Pb free product are available : 99% Sn above can meet RoHS environment substance directive request

MECHANICAL DATA

Case: SOD-523 plastic case.
 Terminals : Solderable per MIL-STD-750,Method 2026
 Standard packaging: 8mm tape
 Weight: approximately 0.002gram

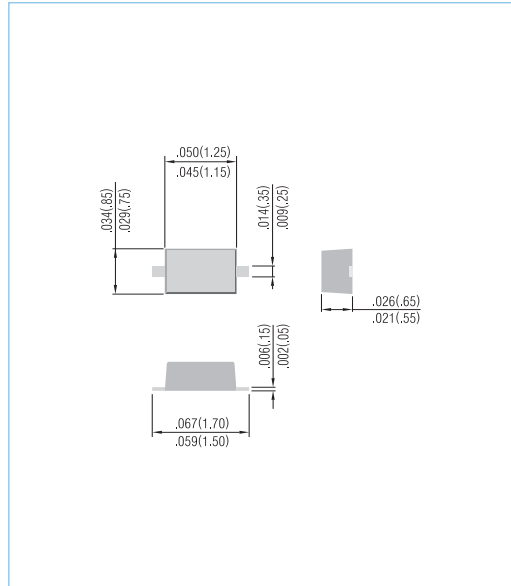

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T_J =25°C unless otherwise noted)

PARAMETER	SYMBOL	MMBD4448TS	UNITS
Marking Code		A3	
Reverse Voltage	V _R	75	V
Peak Reverse Voltage	V _{RM}	100	V
RMS Voltage	V _{RMS}	50	V
Maximum DC Blocking Voltage	V _{DC}	75	V
Maximum Average Forward Current at Ta=25°C	I _{F(AV)}	150	mA
Peak Forward Surge Current, 1.0us	I _{FSM}	4	A
Power Dissipation Derate Above 25°C	P _{TOT}	200	mW
Maximum Forward Voltage	V _F	0.72 / 5mA 1.0 / 100mA	V
Maximum DC Reverse Current at Rated DC Blocking Voltage T _J = 25°C	I _R	2.5@75V	uA
Junction Capacitance(Notes1)	C _J	4.0	pF
Maximum Reverse Recovery (Notes2)	T _{RR}	4.0	ns
Maximum Thermal Resistance	R _{θJA}	625	°C / W
Junction and Storage Temperature Range	T _J	-55 to +150	°C

NOTE:

1. C_J at V_R=0, f=1MHZ
2. From I_F=10mA to I_R=1mA, V_R=6Volts, R_L=100Ω



MMBD4448TS

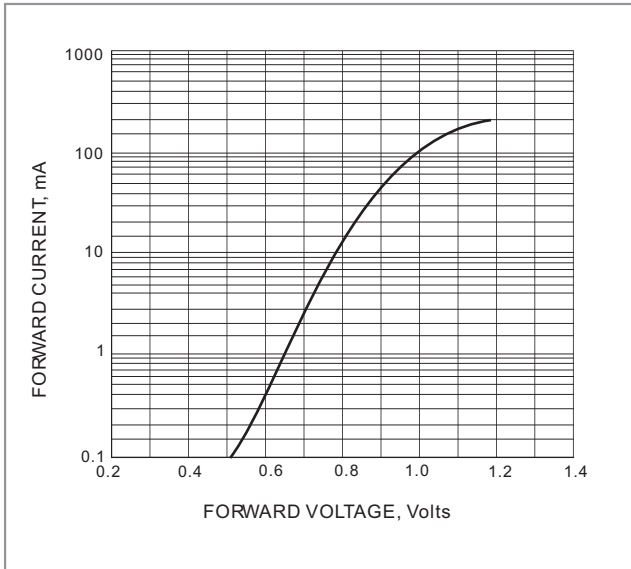


FIG. 1-TYPICAL FORWARD CHARACTERISTIC

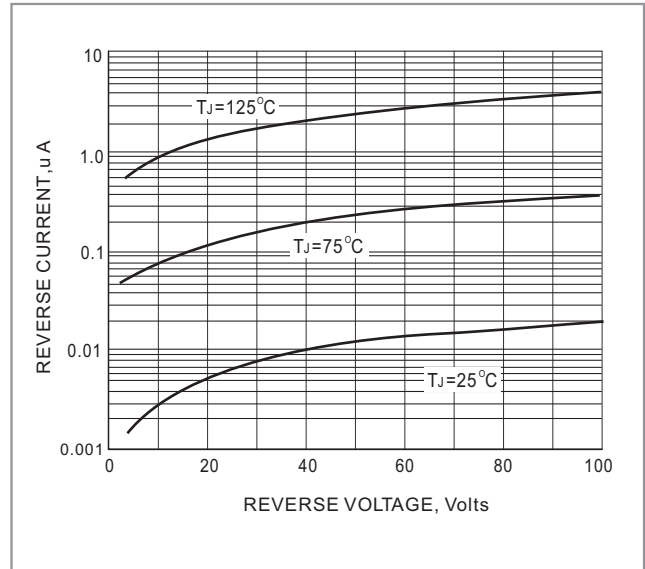


FIG. 2-TYPICAL REVERSE CHARACTERISTICS


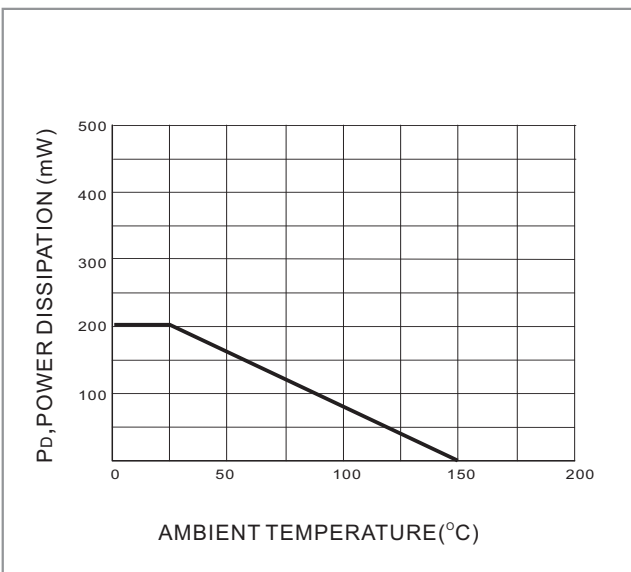


FIG. 3 POWER DERATING CURVE



MMBD4448TS

MOUNTING PAD LAYOUT

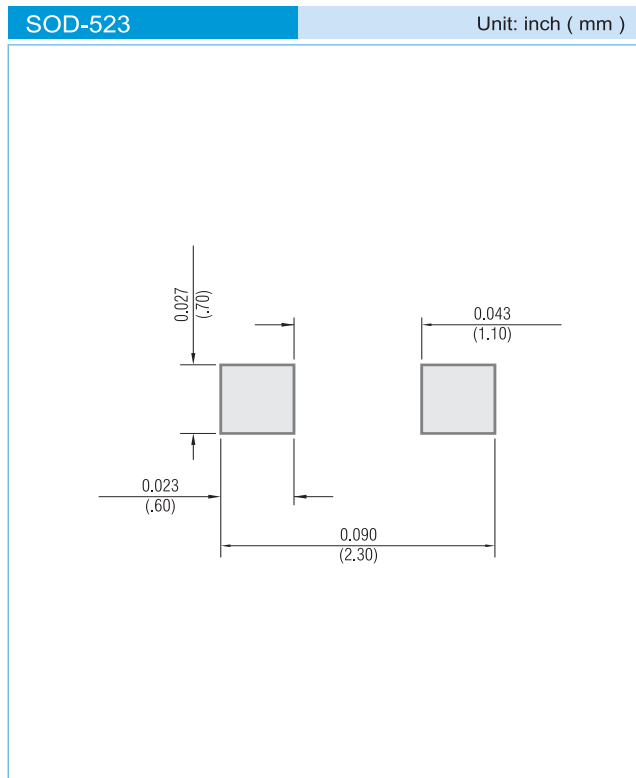

ORDER INFORMATION

- Packing information
 - T/R - 12K per 13" plastic Reel
 - T/R - 5K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2006

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.