



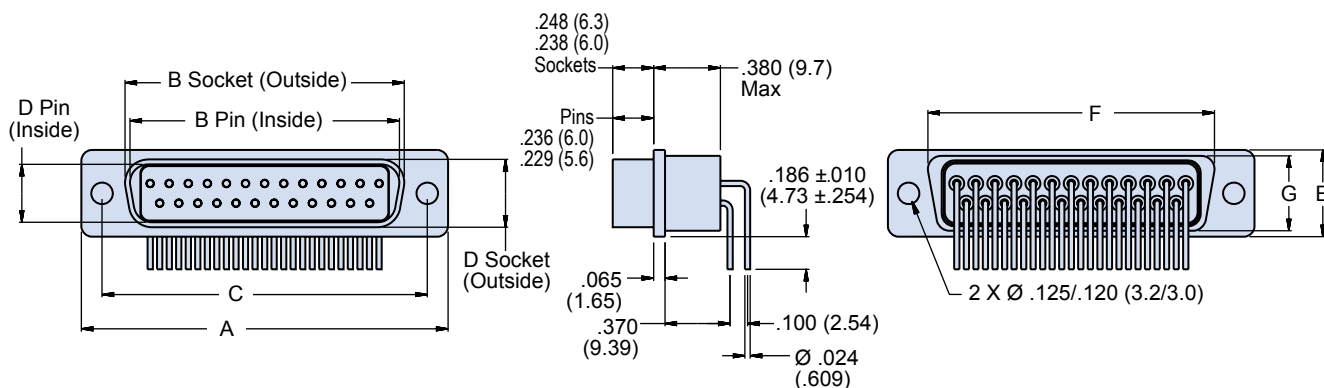

247-167

D-Subminiature Connector, Right Angle EMI Filtered (MIL-DTL-24308 Type) European Footprint

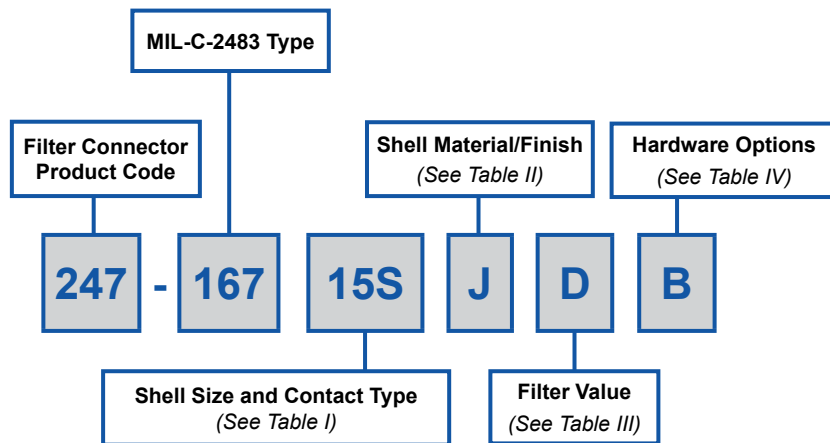

APPLICATION NOTES

1. Materials/Finishes:
Shells - See Table II
Insulators - High grade rigid dielectric/N.A.
Contacts - Copper Alloy/Gold Plated
2. Assembly to be identified with date code, cage code, Glenair P/N, and serial number
3. Dimensions B and D taken from inside of shell for Pin/Plug and outside for Socket/Receptacle
4. Electrical Performance:
Dielectric withstanding voltage class A and B: 100 VDC, all others: 500 VDC
Insulation resistance: 5,000 megohms @ 100 VDC
Current Rating Standard Density: 7.5 Amps max.
Current Rating High Density: 5 Amps maximum
5. Metric dimensions (mm) are indicated in parentheses

247-167
D-Subminiature Connector, Right Angle
EMI Filtered (MIL-DTL-24308 Type) European Footprint



TABLE I: DIMENSIONS

Shell Size	Number of Contacts		A	B	C	D	E	F	G
			±.015 (0.38)	±.005 (0.13)	±.005 (0.13)	±.005 (0.13)	±.015 (0.38)	Max	Max
1	9P	15P	1.213 (30.8)	.666 (16.9)	.984 (25.0)	.329 (8.4)	.494 (12.5)	.769 (19.5)	.432 (11.0)
	9S	15S	1.213 (30.8)	.643 (16.3)	.984 (25.0)	.311 (7.9)	.494 (12.5)	.769 (19.5)	.432 (11.0)
2	15P	26P	1.541 (39.1)	.994 (25.2)	1.312 (33.3)	.329 (8.4)	.494 (12.5)	1.093 (27.8)	.432 (11.0)
	15S	26S	1.541 (39.1)	.971 (24.7)	1.312 (33.3)	.311 (7.9)	.494 (12.5)	1.635 (41.5)	.432 (11.0)
3	25P	44P	2.088 (53.0)	1.534 (39.0)	1.852 (47.0)	.329 (8.4)	.494 (12.5)	1.635 (41.5)	.432 (11.0)
	25S	44S	2.088 (53.0)	1.511 (38.4)	1.852 (47.0)	.311 (7.9)	.494 (12.5)	2.282 (58.0)	.432 (11.0)
4	37P	62P	2.729 (69.3)	2.182 (55.4)	2.500 (63.5)	.329 (8.4)	.494 (12.5)	2.282 (58.0)	.432 (11.0)
	37S	62S	2.729 (69.3)	2.159 (54.8)	2.500 (63.5)	.311 (7.9)	.494 (12.5)	2.282 (58.0)	.432 (11.0)

**TABLE III:
CAPACITANCE RANGE**

Class	C-Circuit [pF]
A	19,000 - 28,000
B	16,000 - 22,500
C	9,000 - 16,500
D	4,000 - 6,000
E	1,650 - 2,500
F	400 - 650
G	200 - 300

TABLE II: SHELL MATERIAL/FINISH

Symbol	Material	Finish Description
J	Aluminum	Yellow Cadmium
M		Electroless Nickel
MT		NI-PTFE 1000 Hour Grey™ Nickel Fluorocarbon Polymer
ZN		Zinc Nickel

TABLE IV: HARDWARE OPTIONS

Symbol	Hardware
B	No Hardware
C	M3 Clinch Nut