


### Features

- 16 dB Gain at 50 MHz
- 15.5 dB Gain at 1000 MHz
- 2.2 dB NF(max) over frequency
- 21 dBm P1dB, 40 dBm OIP3 @ 5V / 90mA
- - μsec Switching Time(max)

### Description

The plerow™ ALN-series is the compactly designed surface-mount module for the use of the LNA with or without the following gain blocks in the infrastructure equipment of the mobile wireless (CDMA, GSM, PCS, PHS, WCDMA, DMB, WLAN, WiBro, WiMAX), GPS, satellite communication terminals, CATV and so on. It has an exceptional performance of low noise figure, high gain, high OIP3, and low bias current. The stability factor is always kept more than unity over the application band in order to ensure its unconditionally stable implementation to the application system environment. The surface-mount module package including the completed matching circuit and other components necessary just in case allows very simple and convenient implementation onto the system board in mass production level.



1-stage Single Type

### Specifications

@ T = 25°C, V<sub>CC</sub> = 5 V, Freq. = 50 ~ 1000 MHz, 75 ohm

Parameter	Unit	Specifications								
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max
Frequency Range	MHz	50 ~ 300			300 ~ 600			600 ~ 1000		
Gain	dB	15	16		15	16		14.5	15.5	
Gain Flatness	dB		± 0.1	± 0.15		± 0.1	± 0.15		± 0.2	± 0.3
Noise Figure	dB		2.0	2.05		2.1	2.05		2.2	2.25
Output IP3 <sup>(1)</sup>	dBm	38	39		38	39		35	36	
S11 / S22 <sup>(2)</sup>	dB			-15 / -10			-12 / -14			-11 / -11
Output P1dB	dBm	20	21		20	21		19	20	
Switching Time <sup>(3)</sup>	sec	-								
Supply Current	mA				90 (Typ)			110 (Max)		
Supply Voltage	V	5								
Impedance	Ω	75								
Max. RF Input Power	dBm	C.W 29 ~ 31 (before fail)								
Package Type & Size	mm	Surface Mount Type, 10Wx10Lx3.8H								

Note: Operating temperature is -40°C to +85°C.

1) OIP3 is measured with two tones at an output power of 5 dBm / tone separated by 6 MHz.

2) S11/S22 (max) is the worst value within the frequency band.

Recommended is the VSWR toward the source and the load less than 4:1 respectively to be free from any oscillation, which may result from the devices ahead or behind in its system application even though it may be unconditionally stable (K factor >1).

3) Switching time means the time that takes for output power to get stabilized to its final level after switching DC voltage from 0 V to 5 V.


### More Information

Website: [www.asb.co.kr](http://www.asb.co.kr)  
E-mail: [sales@asb.co.kr](mailto:sales@asb.co.kr)

Tel: (82) 42-528-7223  
Fax: (82) 42-528-7222

ASB Inc., 4th Fl. Venture Town Bldg., 367-17 Goijeong-Dong, Seo-Gu, Daejeon 302-716, Korea

### Outline Drawing (Unit: mm)

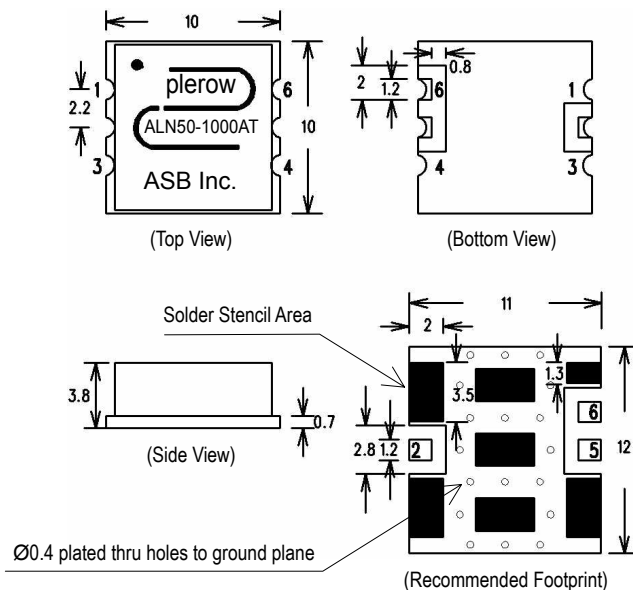

Pin Number	Function
2	RF In
5	RF Out
6	+Vcc
Others	Ground

Note: 1. The number and size of ground via holes in a circuit board is critical for thermal RF grounding considerations.

2. We recommend that the ground via holes be placed on the bottom of all ground pins for better RF and thermal performance, as shown in the drawing at the left side.

**Typical Performance  
(Measured)**

---

**CATV**

---


**50~1000**

---


**+5 V**

---


**S-parameters**

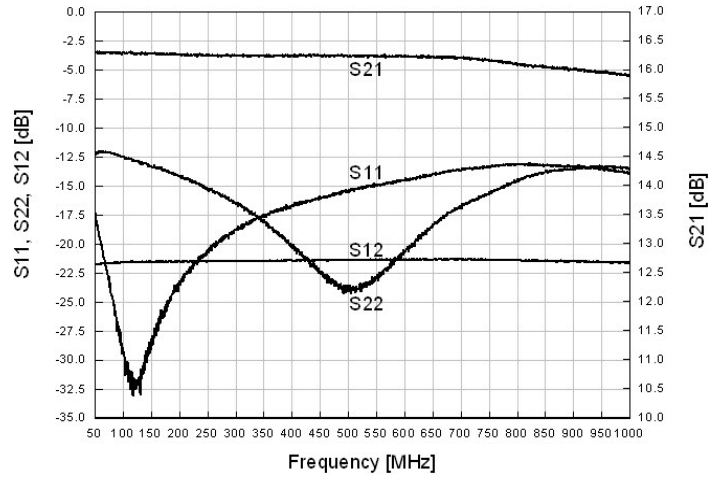


**Stability Factor (K)**

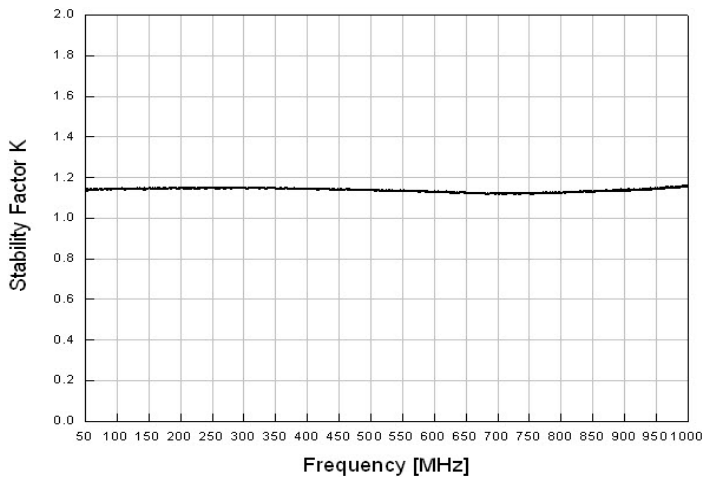

**Noise Figure**

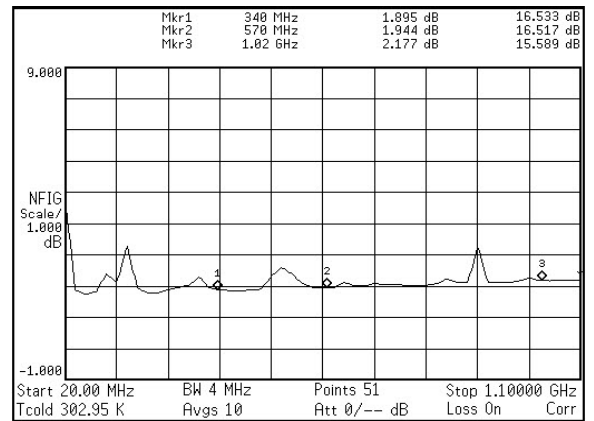

**OIP3**

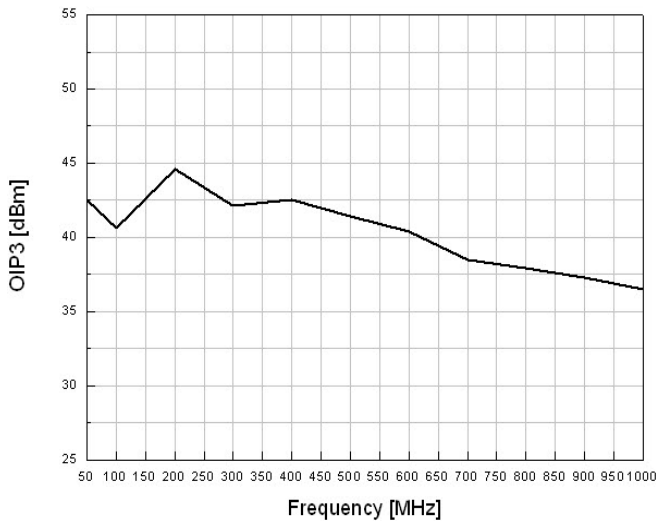

**P1dB**

