



Shanghai Lunsure Electronic  
Technology Co.,LTD  
Tel:0086-21-37185008  
Fax:0086-21-57152769

ARL251/ARSL251  
THRU  
ARL256/ARSL256

**BUTTON DIODES**


**VOLTAGE RANGE  
100 TO 600 VOLTS  
CURRENT 25AMPS**

**Features**

- Low leakage
- Low forward voltage drop
- High current capability
- High forward surge current capability

**Mechanical Data**

- Case: transfer molded plastic
- Technology: button with vacuum soldered
- Epoxy: UL94V-0 rate flame retardant
- Polarity: color ring denotes cathode
- Lead: Plated lead, solderable per MIL-STD-202E method 20
- Mounting position: Any
- Weight: ARL 2.70 grams, ARSL 2.60 grams

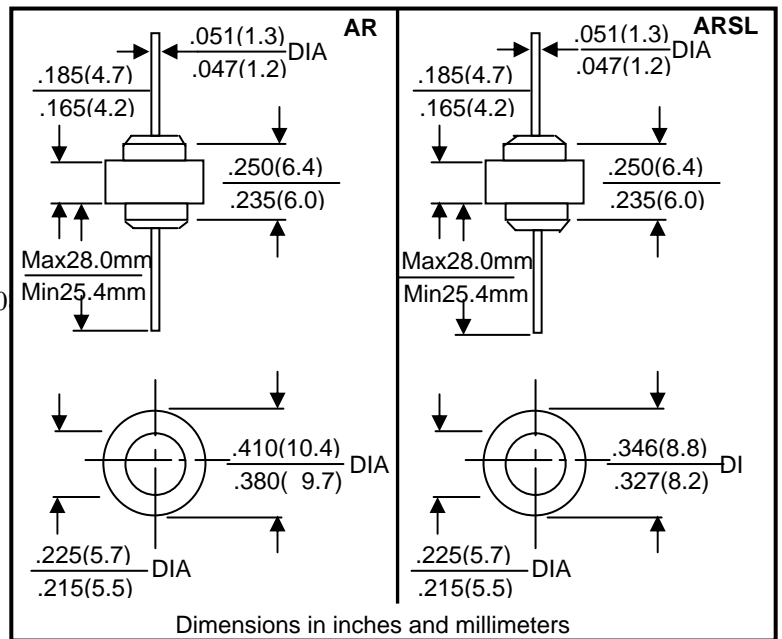

**Maximum Ratings and Electrical Characteristics**

Rating at 25°C ambient temperature unless otherwise specified  
Single phase, half wave, 60Hz, resistive or inductive load  
For capacitive load derate current by 20%

Parameters	Symbols	ARL251 ARSL251	ARL252 ARSL252	ARL253 ARSL253	ARL254 ARSL254	ARL256 ARSL256	Units
Maximum repetitive peak reverse voltage	$V_{RRM}$	100	200	300	400	600	Volts
Maximum RM S voltage	$V_{RMS}$	70	140	210	280	420	Volts
Maximum DC blocking voltage	$V_{DC}$	100	200	300	400	600	Volts
Maximum Average rectified forward current at $T_C=110^\circ C$	$I_o$	25					Amps
Peak forward surge current 8.3mS single half sine-wave superimposed on rated load (JE DEC Method)	$I_{FSM}$	400					Amps
Rating for fusing( $t<8.3ms$ )	$I^2t$	664					$A^2S$
Maximum instantaneous forward voltage drop at 100A	$V_F$	1.1					Volts
Maximum DC reverse current $T_A=25^\circ C$ at rated DC blocking voltage $T_A=150^\circ C$	$I_R$	5.0 450					$\mu A$
Typical thermal resistance	$R_{\theta JC}$	1.0					$^\circ C/W$
Operating and storage temperature	$T_J, T_{STG}$	-65 to +175					$^\circ C$

Notes: 1. Enough heatsink must be considered in application.

# ARL251 THRU ARL256 ARSL251 THRU ARSL256

## Ratings and Characteristic Curves

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

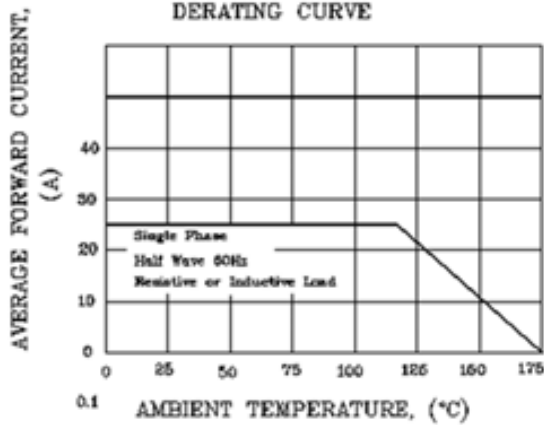


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

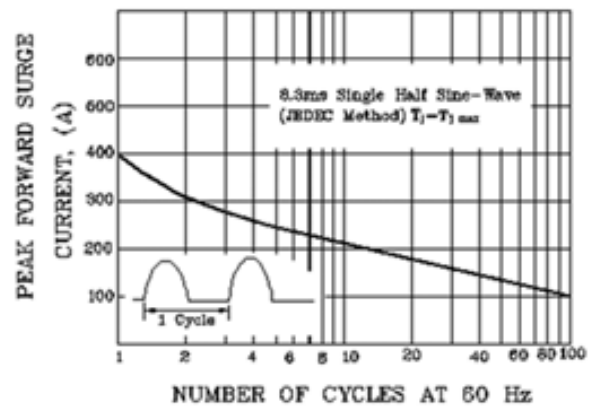


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

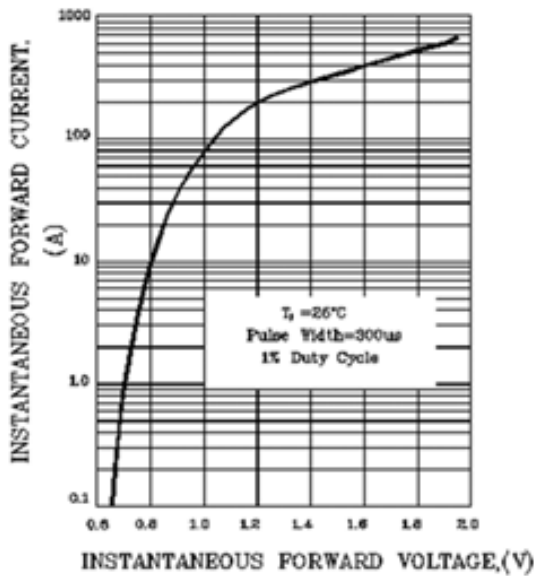


FIG.4- FORWARD POWER DISSIPATION

