



High Voltage Transistors

Lead free product

FEATURE

- We declare that the material of product compliance with RoHS requirements.

MMBT5550G
MMBT5551G



MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector–Emitter Voltage	V_{CEO}	140	Vdc
Collector–Base Voltage	V_{CBO}	160	Vdc
Emitter–Base Voltage	V_{EBO}	6.0	Vdc
Collector Current — Continuous	I_C	600	mAdc

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR–5 Board, (1) $T_A = 25^\circ\text{C}$	P_D	225	mW
Derate above 25°C		1.8	mW/ $^\circ\text{C}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	556	$^\circ\text{C}/\text{W}$
Total Device Dissipation Alumina Substrate, (2) $T_A = 25^\circ\text{C}$	P_D	300	mW
Derate above 25°C		2.4	mW/ $^\circ\text{C}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	417	$^\circ\text{C}/\text{W}$
Junction and Storage Temperature	T_J, T_{stg}	-55 to +150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted.)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector–Emitter Breakdown Voltage(3) ($I_C = 1.0 \text{ mAdc}, I_B = 0$)	MMBT5550G MMBT5551G	$V_{(BR)CEO}$	140 160	—	Vdc
Collector–Base Breakdown Voltage ($I_C = 100 \mu\text{Adc}, I_E = 0$)	MMBT5550G MMBT5551G	$V_{(BR)CBO}$	160 180	—	Vdc
Emitter–Base Breakdown Voltage ($I_E = 10 \mu\text{Adc}, I_C = 0$)		$V_{(BR)EBO}$	6.0	—	Vdc
Collector Cutoff Current ($V_{CB} = 100\text{Vdc}, I_E = 0$)	MMBT5550G	I_{CBO}	—	100	nAdc
($V_{CB} = 120\text{Vdc}, I_E = 0$)	MMBT5551G		—	50	
($V_{CB} = 100\text{Vdc}, I_E = 0, T_A = 100^\circ\text{C}$)	MMBT5550G		—	100	μAdc
($V_{CB} = 120\text{Vdc}, I_E = 0, T_A = 100^\circ\text{C}$)	MMBT5551G		—	50	
Emitter Cutoff Current ($V_{BE} = 4.0\text{Vdc}, I_C = 0$)		I_{EBO}	—	50	nAdc

1. FR–5 = 1.0 x 0.75 x 0.062 in.
2. Alumina = 0.4 x 0.3 x 0.024 in. 99.5% alumina.
3. Pulse Test: Pulse Width = 300 μs , Duty Cycle = 2.0%.

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) (Continued)

Characteristic		Symbol	Min	Max	Unit
ON CHARACTERISTICS					
DC Current Gain		h_{FE}			—
(I _C = 1.0 mA, V _{CE} = 5.0 Vdc)	MMBT5550G		60	—	
	MMBT5551G		80	—	
(I _C = 10 mA, V _{CE} = 5.0 Vdc)	MMBT5550G		60	250	
	MMBT5551G		80	250	
(I _C = 50 mA, V _{CE} = 5.0Vdc)	MMBT5550G		20	—	
	MMBT5551G		30	—	
Collector–Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I _C = 10 mA, I _B = 1.0 mA)	Both Types		—	0.15	
(I _C = 50 mA, I _B = 5.0 mA)	MMBT5550G		—	0.25	
	MMBT5551G		—	0.20	
Base–Emitter Saturation Voltage		$V_{BE(sat)}$			Vdc
(I _C = 10 mA, I _B = 1.0 mA)	Both Types		—	1.0	
(I _C = 50 mA, I _B = 5.0 mA)	MMBT5550G		—	1.2	
	MMBT5551G		—	1.0	

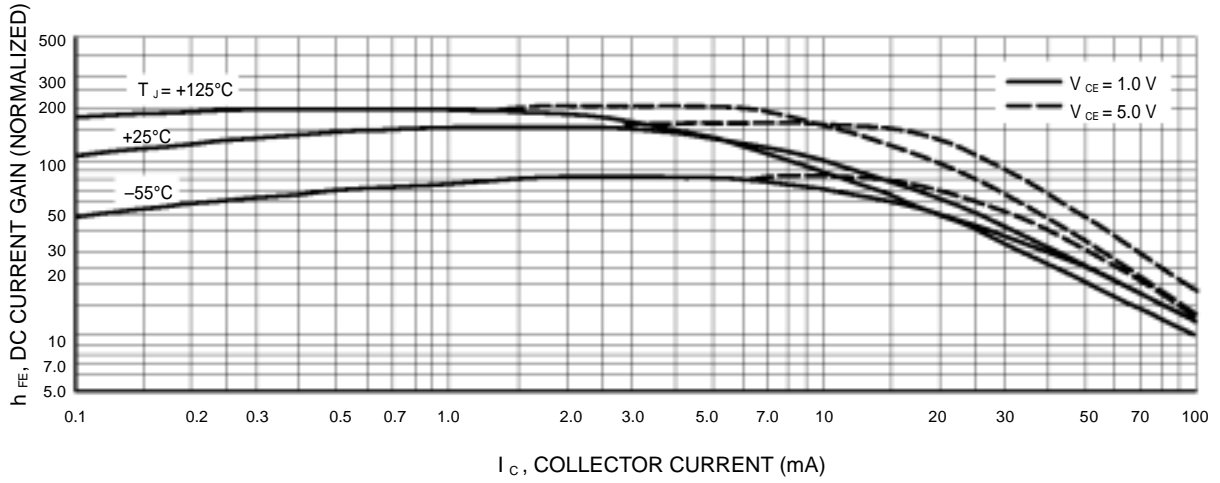


Figure 15. DC Current Gain

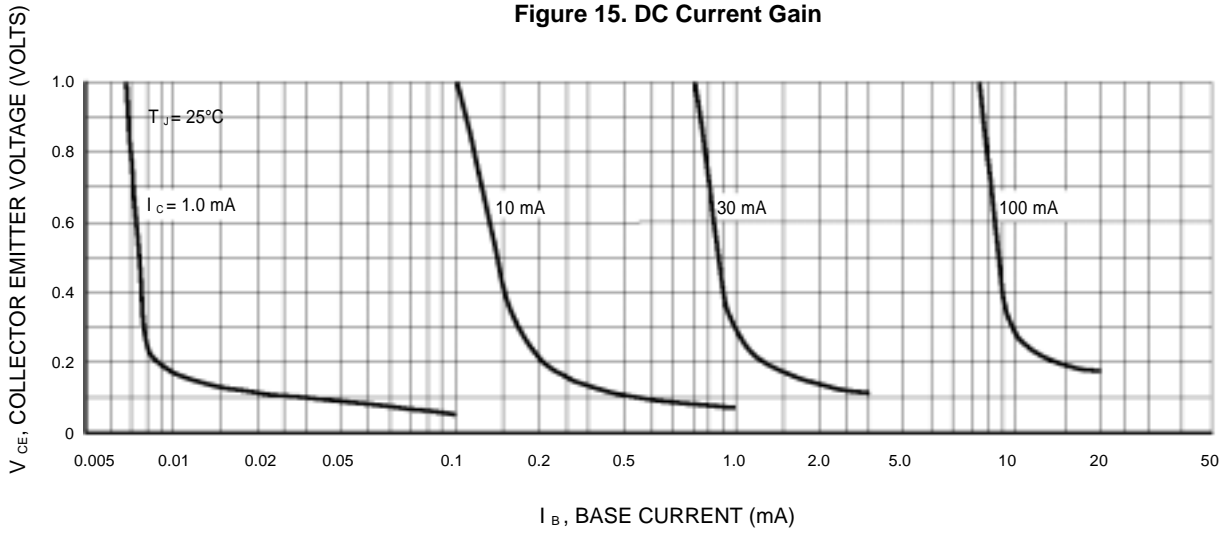


Figure 16. Collector Saturation Region

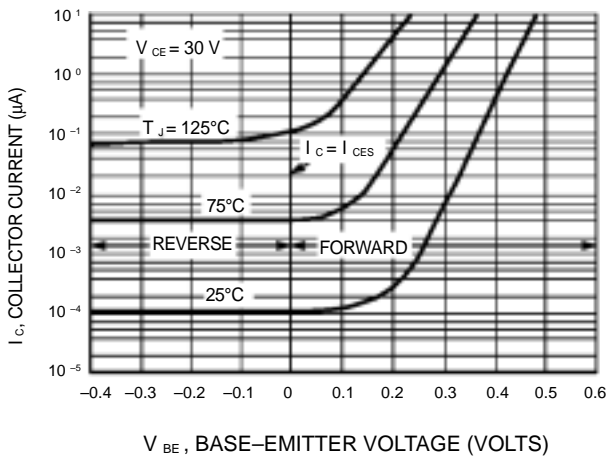


Figure 3. Collector Cut-Off Region

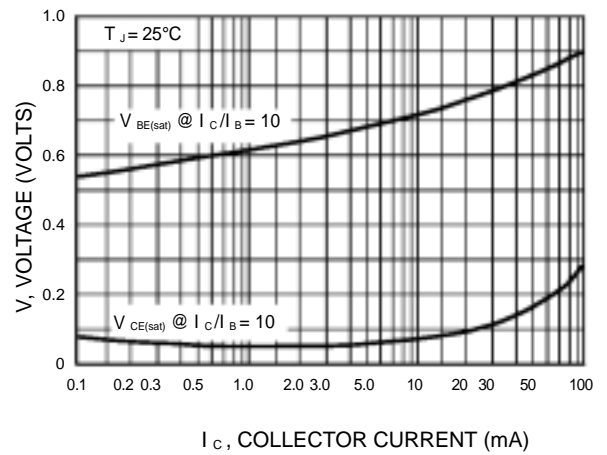


Figure 4. "On" Voltages


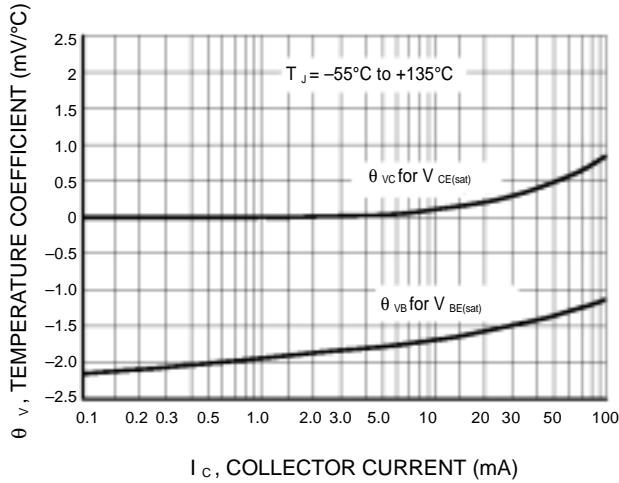


Figure 5. Temperature Coefficients

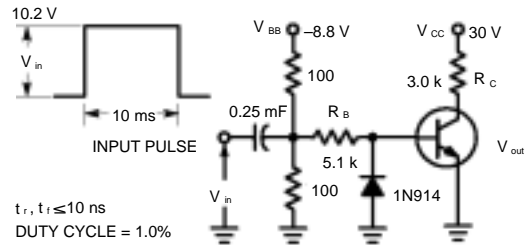

Values Shown are for $I_C @ 10 \text{ mA}$
Figure 6. Switching Time Test Circuit


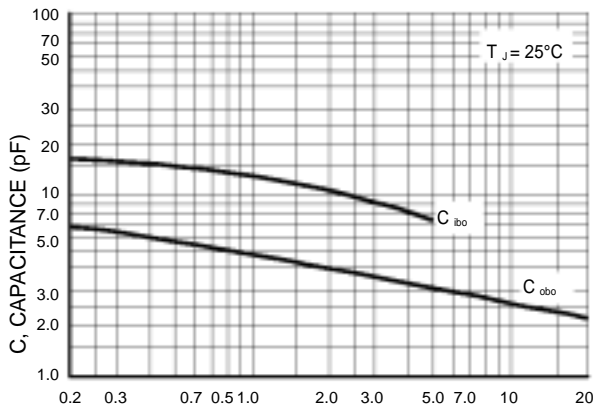


Figure 7. Capacitances Figure

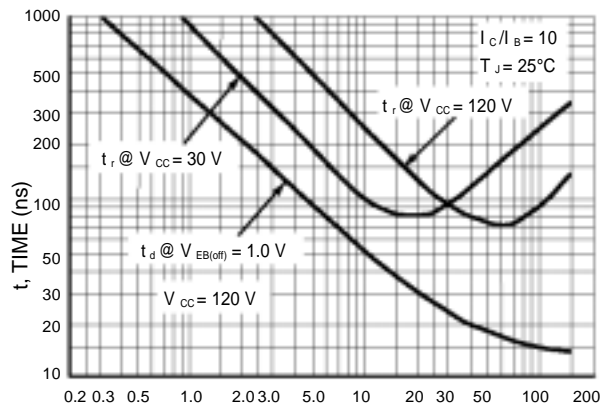

8. Turn-On Time

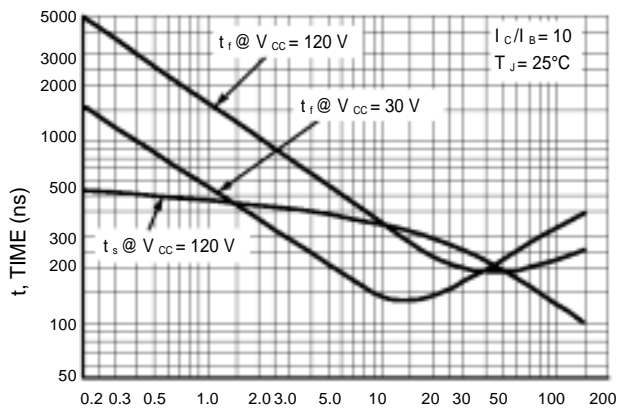


Figure 9. Turn-Off Time