

CW Power Transistor 5W, 2.3 GHz

M/A-COM Products
Released - Rev. 07.07


Features

- NPN silicon microwave power transistor
- Common base configuration
- Class C operation
- Interdigitated geometry
- Diffused emitter ballasting resistors
- Gold metalization system
- Hermetic metal / ceramic package

ABSOLUTE MAXIMUM RATING AT 25°C

Parameter	Symbol	Rating	Units
Collector-Emitter Voltage	V_{CES}	60	V
Emitter-Base Voltage	V_{EBO}	3.0	V
Collector Current	I_C	0.8	A
Power Dissipation	P_D	25	W
Junction Temperature	T_J	200	°C
Storage Temperature	T_{STG}	-65 to + 200	°C
Thermal Resistance	θ_{JC}	7.0	°C/W

Outline Drawing

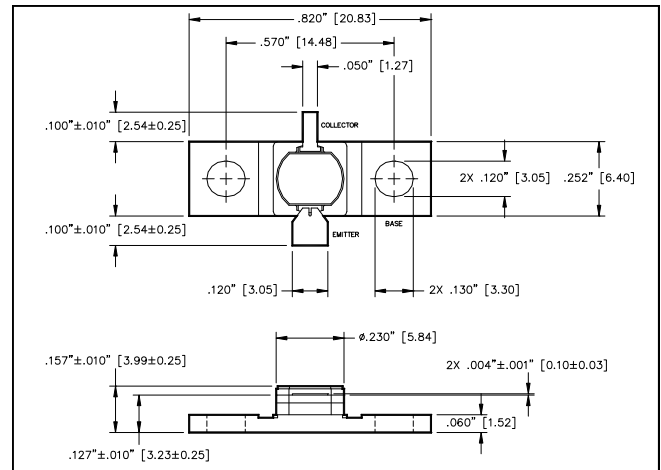


UNLESS OTHERWISE NOTED, TOLERANCES ARE INCHES ±.005" [MILLIMETERS ±0.13MM]

ELECTRICAL SPECIFICATIONS AT 25°C


Parameter	Symbol	Min	Max	Units	Test Conditions
Collector-Emitter Breakdown Voltage	BV_{CES}	60	-	V	$I_C = 10\text{mA}$
Collector-Emitter Leakage Current	I_{CES}	-	2.0	mA	$V_{CE} = 28\text{V}$
Input Power	P_{IN}	-	0.79	w	$V_{CE} = 28\text{V}$, $P_{out} = 5.0\text{W}$, $F = 2.3\text{GHz}$
Power Gain	G_P	8	-	dB	$V_{CE} = 28\text{V}$, $P_{out} = 5.0\text{W}$, $F = 2.3\text{GHz}$
Collector Efficiency	η_C	35	-	%	$V_{CE} = 28\text{V}$, $P_{out} = 5.0\text{W}$, $F = 2.3\text{GHz}$
Input Return Loss	RL	6	-	dB	$V_{CE} = 28\text{V}$, $P_{out} = 5.0\text{W}$, $F = 2.3\text{GHz}$
Load Mismatch Tolerance	VSWR-T	-	3:1	-	$V_{CE} = 28\text{V}$, $P_{out} = 5.0\text{W}$, $F = 2.3\text{GHz}$

TEST FIXTURE IMPEDANCES

F (GHz)	Z_{IN} (Ω)	Z_{LOAD} (Ω)
2.30	$3.5-j17.0$	$4.0+j0.3$

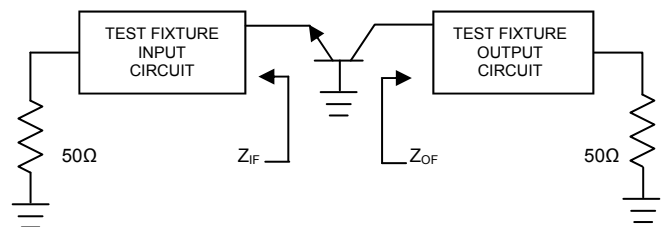

TEST FIXTURE DIMENSIONS

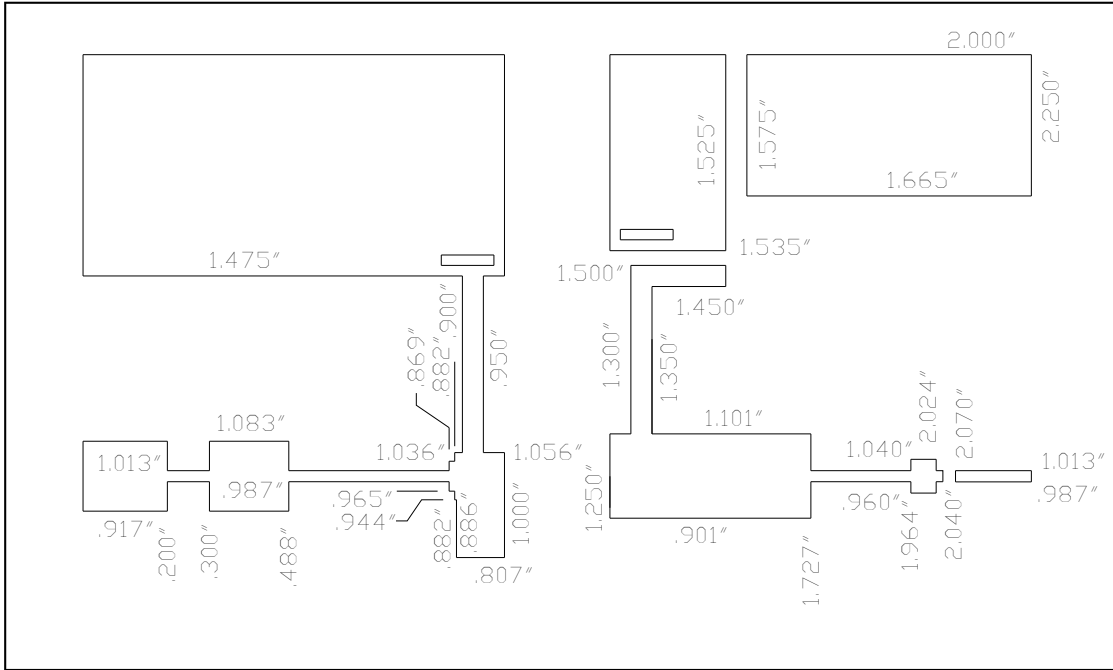

TEST FIXTURE ASSEMBLY

