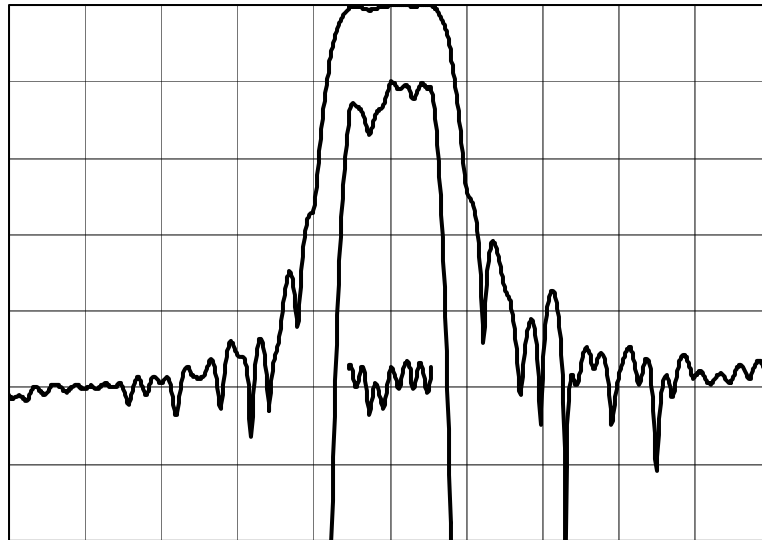


TYPICAL PERFORMANCE


Horizontal: 0.5 MHz/div Vertical (from top): Magnitude 10 dB/div
 Magnitude 1 dB/div
 Group Delay 200 ns./div

SPECIFICATION

Parameter	Min	Typ	Max	Units
Center Frequency (F_C) ¹		240		MHz
Insertion Loss ²		14	16	dB
1 dB Bandwidth ³	1.1			MHz
10 dB Bandwidth ³			1.8	MHz
25 dB Bandwidth ³			2.5	MHz
35 dB Bandwidth ³			3.4	MHz
Passband Amplitude Ripple ⁴		0.8	1.25	dB p-p
Passband Phase Linearity ⁴		4	6	deg p-p
Average Passband Delay ⁴		2.58	2.75	μ s
Passband Group Delay Ripple ⁴		140	200	ns p-p
Ultimate rejection, $F_C \pm (2.5 \text{ to } 70)$ MHz	40	45		dB
Return Loss at Input and Output ⁴	6	14		dB
Source and Load Impedance		50		Ω
Operating Temperature Range ⁵	-10		+85	$^{\circ}$ C


Notes:

1. Fixed reference. All specified bandwidths are centered at this frequency.
2. Average across passband range $F_C \pm 0.55$ MHz.
3. All bandwidth dB values are taken relative to the Insertion Loss.
4. Over the passband range $F_C \pm 0.55$ MHz.
5. All electrical specifications apply over the full operating temperature range.

Micro Networks Corporation

Worldwide Headquarters: 324 Clark Street Worcester, MA 01606. tel: 508-852-5400 fax: 508-852-8456
 European Sales Headquarters: Hertosingel 20 6214 AD Maastricht, Netherlands. tel: +31-43-32-70912 fax: +31-43-32-70715
www.micronetworks.com

PACKAGE OUTLINE

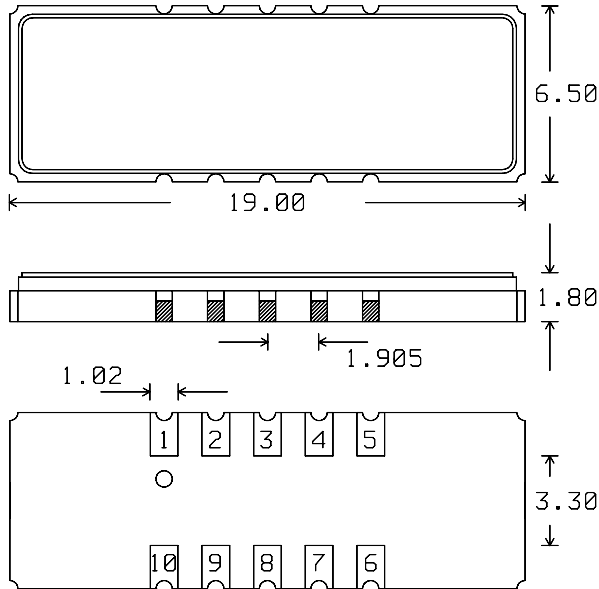


Units: mm

Pin Configuration:

Input: 10
 Input Return: 1
 Output: 5
 Output Return: 6
 Ground: 2, 3, 4, 7, 8, 9

MATCHING CIRCUIT

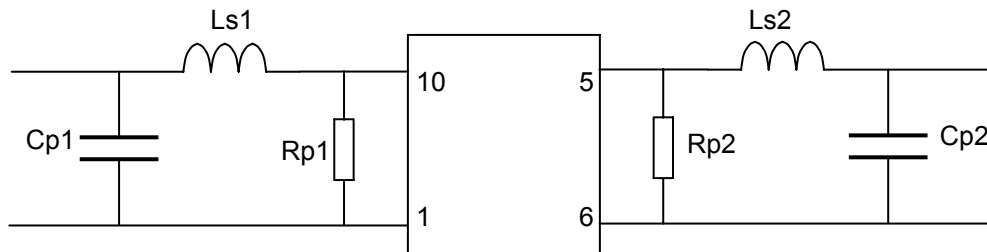

Typical component values: Cp1 = 27 pF Cp2 = 27 pF
 Ls1 = 39 nH Ls2 = 47 nH
 Rp1 = 560 Ω Rp2 = 1.5 kΩ

Note:

- Component values may change depending on board layout.

ISO 9001
Registered