

**5X8**  
dots**DM1621**

(16 Characters x 2 Lines) 1/16 Duty

SANYO SEMICONDUCTOR CORP

**Absolute maximum ratings**

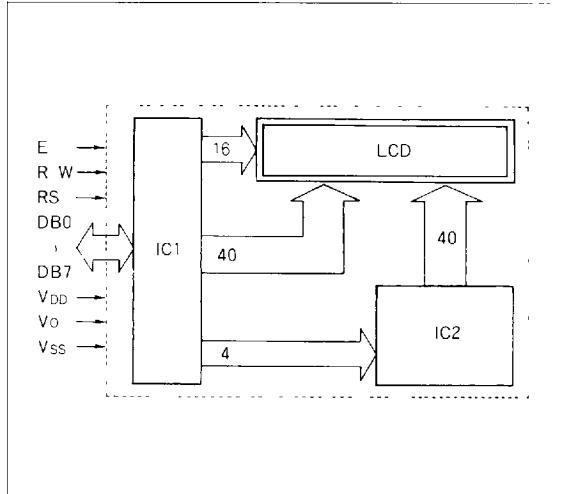
Parameter	Symbol	min.	max.	unit
Logic supply voltage	$V_{DD} - V_{SS}$	-0.3	7.0	V
LCD supply voltage	$V_{DD} - V_o$	-0.3	13.5	V
Input voltage	$V_i$	-0.3	$V_{DD} + 0.3$	V
Operating temperature	$T_{opg}$	0	+50	°C
Storage temperature	$T_{stg}$	-20	+70	°C

**Electrical characteristics ( $T_a = 25^\circ\text{C}$ ,  $V_{DD} = 5.0 \pm 0.25\text{V}$ )**

Parameter	Symbol	Condition	min.	typ.	max.	unit
Input high-level voltage	$V_{IH}$	—	2.2	—	$V_{DD}$	V
Input low-level voltage	$V_{IL}$	—	0	—	0.6	V
Output high-level voltage	$V_{OH}$	$-I_{OH} = 0.2\text{mA}$	2.4	—	$V_{DD}$	V
Output low-level voltage	$V_{OL}$	$I_{OL} = 1.2\text{mA}$	0	—	0.4	V
Supply current	$I_{DD}$	—	—	1.5	3.0	mA

**Pin function**

No	Symbol	Function
1	$V_{SS}$	Gnd pin, OV
2	$V_{DD}$	Positive power pin, +5V
3	$V_o$	LCD drive voltage input pin
4	RS	Data/instruction select input pin
5	R/W	Read/write select input pin
6	E	Enable input pin
7	DB 0	
8	DB 1	Data bus line (Lower 4 bits)
9	DB 2	
10	DB 3	
11	DB 4	Data bus line (Upper 4 bits)
12	DB 5	* When interface data is 4 bits long, data is transferred
13	DB 6	using only 4 buses of DB4 to DB7.
14	DB 7	
0	NC	(LED K:cathode negative power pin)

**Block diagram****Module dimensions**

(unit : mm)

