



NPN TRIPLE DIFFUSED PLANAR SILICON TRANSISTOR


2SD1547

COLOR TV HORIZONTAL OUTPUT
APPLICATIONS(NO Damper Diode)

- High Collector-Base Voltage($V_{CBO}=1500V$)
- High Speed Switching

ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}C$)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CBO}	1500	V
Collector-Emitter Voltage	V_{CEO}	800	V
Emitter-Base voltage	V_{EBO}	6	V
Collector Current (DC)	I_C	7	A
Collector Dissipation ($T_c=25^{\circ}C$)	P_C	50	W
Junction Temperature	T_j	150	$^{\circ}C$
Storage Temperature	T_{stg}	-50~150	$^{\circ}C$

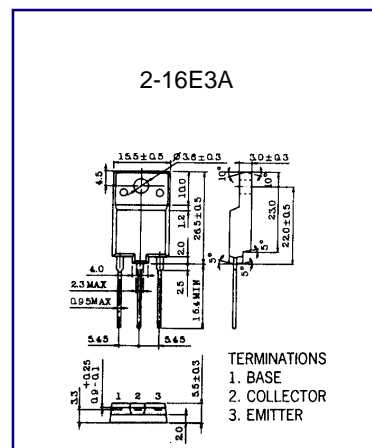

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}C$)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector- Emitter Cutoff Current($V_{BE}=0$)	I_{CES}	$V_{CE}= 1400 V , R_{BE}=0$			1.0	mA
Collector Cutoff Current	I_{CBO}	$V_{CB}= 800 V , I_E=0$			10	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB}= 4V , I_C=0$			1.0	mA
DC Current Gain	h_{FE}	$V_{CE}= 5V , I_C=1A$	8			
Collector- Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=6A , I_B=1.2A$			5.0	V

Wing Shing Computer Components Co., (H.K.)Ltd.
Homepage: <http://www.wingshing.com>

Tel:(852)2341 9276 Fax:(852)2797 8153
E-mail: wsccltd@hkstar.com