

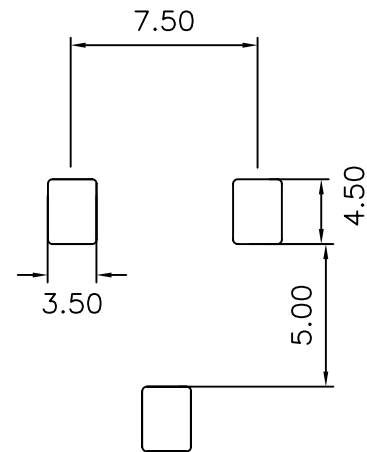



1. Mechanical Dimensions:

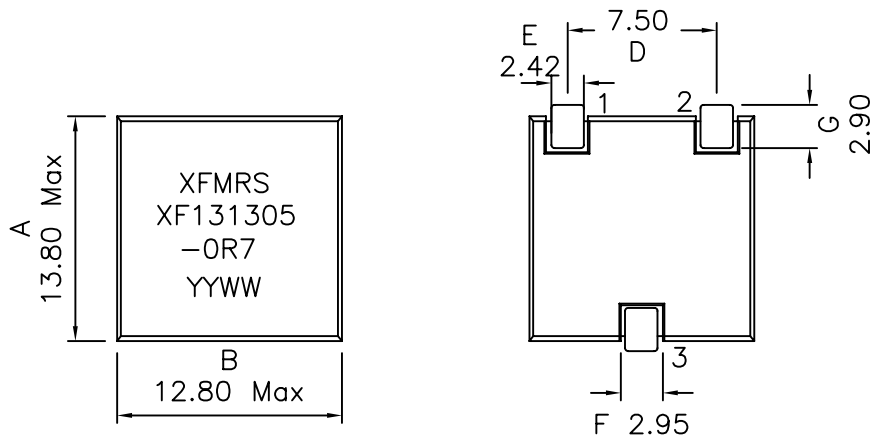

Suggested PAD Layout

2. Schematic:



3. Electrical Specifications:

OCL: Pins 1-2 0.70uH Typ @10KHz 0.1V

DCR: Pins 1-2 1.2mOhms Typ

Rated Current: 35Adc

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Temperature rating: 155°C. UL file E151556
5. Operating Temperature Range: -40°C to +85°C

DOC REV: A/6

XFMRs Inc		Title: INDUCTORS	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XF131305-0R7		REV. A
	DWN.	罗振江	Sep-18-03
	CHK.	廖玉坤	Sep-18-03
SHT 1 OF 1	APP.	Isaiah M	Sep-18-03