



# Ultra-Low-Power Precision Series Voltage Reference

MAX6029

## General Description


The MAX6029 micropower, low-dropout bandgap voltage reference combines ultra-low supply current and low drift in a miniature 5-pin SOT23 surface-mount package that uses 70% less board space than comparable devices in an SO package. An initial accuracy of 0.15% and a 30ppm/°C (max) temperature coefficient make the MAX6029 suitable for precision applications. This series-mode voltage reference sources up to 4mA and sinks up to 1mA of load current. A wide 2.5V to 12.6V supply range, ultra-low 5.25μA (max) supply current, and a low 200mV dropout voltage make these devices ideal for battery-operated systems. Additionally, an internal compensation capacitor eliminates the need for an external compensation capacitor and ensures stability with load capacitances up to 10μF.

The MAX6029 provides six output voltages of 2.048V, 2.5V, 3V, 3.3V, 4.096V, and 5V. The MAX6029 is available in a 5-pin SOT23 or an 8-pin SO package and is specified over the extended temperature range (-40°C to +85°C).

## Applications

Battery-Powered Systems  
Hand-Held Instruments  
Precision Power Supplies  
A/D and D/A Converters

## Pin Configurations

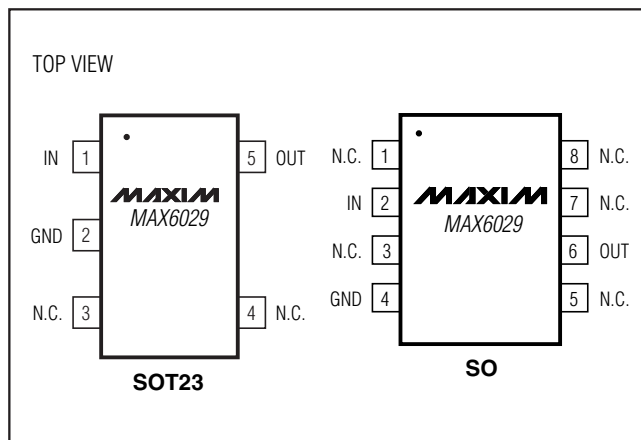

## Features

- ◆ Ultra-Low 5.25μA (max) Supply Current
- ◆ ±0.15% (max) Initial Accuracy
- ◆ 30ppm/°C (max) Temperature Coefficient
- ◆ 4mA Output Source Current
- ◆ 1mA Output Sink Current
- ◆ 2.5V to 12.6V Supply Range
- ◆ Low 200mV Dropout
- ◆ Stable with Capacitive Loads Up to 10μF
- ◆ No External Capacitors Required
- ◆ Miniature 5-Pin SOT23 Package, 8-Pin SO Package

## Ordering Information

| PART           | PIN-PACKAGE | TOP MARK | PKG CODE |
|----------------|-------------|----------|----------|
| MAX6029EUK21-T | 5 SOT23-5   | AEHD     | U5-1     |
| MAX6029EUK25-T | 5 SOT23-5   | AEHF     | U5-1     |
| MAX6029ESA25   | 8 SO        | —        | S8-2     |
| MAX6029EUK30-T | 5 SOT23-5   | AEHH     | U5-1     |
| MAX6029EUK33-T | 5 SOT23-5   | AEHN     | U5-1     |
| MAX6029EUK41-T | 5 SOT23-5   | AEHJ     | U5-1     |
| MAX6029ESA41   | 8 SO        | —        | S8-2     |
| MAX6029EUK50-T | 5 SOT23-5   | AEHL     | U5-1     |

**Note:** All devices are specified over the -40°C to +85°C operating temperature range.

## Selector Guide

| PART           | PIN-PACKAGE | OUTPUT VOLTAGE (V) |
|----------------|-------------|--------------------|
| MAX6029EUK21-T | 5 SOT23-5   | 2.048              |
| MAX6029EUK25-T | 5 SOT23-5   | 2.500              |
| MAX6029ESA25   | 8 SO        | 2.500              |
| MAX6029EUK30-T | 5 SOT23-5   | 3.000              |
| MAX6029EUK33-T | 5 SOT23-5   | 3.300              |
| MAX6029EUK41-T | 5 SOT23-5   | 4.096              |
| MAX6029ESA41   | 8 SO        | 4.096              |
| MAX6029EUK50-T | 5 SOT23-5   | 5.000              |

# Ultra-Low-Power Precision Series Voltage Reference

## ABSOLUTE MAXIMUM RATINGS

IN to GND .....-0.3V to +13V  
 OUT to GND .....-0.3V to the lower of +6V and ( $V_{IN} + 0.3V$ )  
 Output to GND Short-Circuit Duration.....Continuous  
 Continuous Power Dissipation ( $T_A = +70^\circ\text{C}$ )  
 5-Pin SOT23 (derate 7.1mW/ $^\circ\text{C}$  above  $+70^\circ\text{C}$ ).....571mW  
 8-Pin SO (derate 5.9mW/ $^\circ\text{C}$  above  $+70^\circ\text{C}$ ).....470.6mW

Operating Temperature Range .....-40 $^\circ\text{C}$  to +85 $^\circ\text{C}$   
 Storage Temperature Range .....-65 $^\circ\text{C}$  to +150 $^\circ\text{C}$   
 Lead Temperature (soldering, 10s) .....+300 $^\circ\text{C}$

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS—MAX6029\_21 ( $V_{OUT} = 2.048V$ )

( $V_{IN} = 2.5V$ ,  $I_{OUT} = 0$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ\text{C}$ .) (Note 1)

| PARAMETER                              | SYMBOL                          | CONDITIONS  | MIN    | TYP    | MAX    | UNITS                     |
|--|---------------------------------|---|--------|--------|--------|---------------------------|
| <b>OUTPUT</b>                          |                                 |   |        |        |        |                           |
| Output Voltage                         | $V_{OUT}$                       | $T_A = +25^\circ\text{C}$                             | 2.0449 | 2.0480 | 2.0511 | V                         |
| Output Voltage Temperature Coefficient | $TCV_{OUT}$                     | (Notes 2, 3)  |        |        | 30     | ppm/ $^\circ\text{C}$     |
| Line Regulation                        | $\Delta V_{OUT}/\Delta V_{IN}$  | $V_{IN} = 2.5V$ to 12.6V                              |        | 27     | 200    | $\mu\text{V}/V$           |
| Load Regulation                        | $\Delta V_{OUT}/\Delta I_{OUT}$ | $I_{OUT} = 0$ to 4mA                                  |        | 0.22   | 0.7    | $\mu\text{V}/\mu\text{A}$ |
|  |                                 | $I_{OUT} = 0$ to -1mA                                 |        | 2.4    | 5.5    |                           |
| Output Short-Circuit Current           | $I_{SC}$                        |   |        | 60     |        | mA                        |
| Long-Term Stability                    | $\Delta V_{OUT}/\text{time}$    | 1000 hours at $+25^\circ\text{C}$                     |        | 150    |        | ppm                       |
| Thermal Hysteresis                     |                                 | (Note 4)  |        | 140    |        | ppm                       |
| <b>DYNAMIC CHARACTERISTICS</b>         |                                 |   |        |        |        |                           |
| Noise Voltage                          | $e_{OUT}$                       | $f = 0.1\text{Hz}$ to 10Hz                            |        | 30     |        | $\mu\text{V}_{P-P}$       |
|  |                                 | $f = 10\text{Hz}$ to 1kHz                             |        | 115    |        | $\mu\text{V}_{RMS}$       |
| Ripple Rejection                       | $\Delta V_{OUT}/\Delta V_{IN}$  | $V_{IN} = 2.5V \pm 200\text{mV}$ , $f = 120\text{Hz}$ |        | 43     |        | dB                        |
| Turn-On Settling Time                  | $t_R$                           | To $V_{OUT} = 0.1\%$ of final value                   |        | 450    |        | $\mu\text{s}$             |
| <b>INPUT</b>                           |                                 |   |        |        |        |                           |
| Supply Voltage Range                   | $V_{IN}$                        |   | 2.5    |        | 12.6   | V                         |
| Supply Current                         | $I_{IN}$                        |   |        |        | 5.25   | $\mu\text{A}$             |
| Change in Supply Current               | $I_{IN}/V_{IN}$                 | $V_{IN} = 2.5V$ to 12.6V                              |        |        | 1.5    | $\mu\text{A}/V$           |

# Ultra-Low-Power Precision Series Voltage Reference

**MAX6029**

## ELECTRICAL CHARACTERISTICS—MAX6029\_25 (V<sub>OUT</sub> = 2.500V)

(V<sub>IN</sub> = 2.7V, I<sub>OUT</sub> = 0, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                              | SYMBOL                               | CONDITIONS                                | MIN        | TYP    | MAX    | UNITS             |   |
|--|--------------------------------------|---|------------|--------|--------|-------------------|---|
| <b>OUTPUT</b>                          |                                      |   |            |        |        |                   |   |
| Output Voltage                         | V <sub>OUT</sub>                     | T <sub>A</sub> = +25°C                    | MAX6029EUK | 2.4963 | 2.5000 | 2.5038            | V |
|  |                                      |   | MAX6029ESA | 2.495  | 2.500  | 2.505             |   |
| Output Voltage Temperature Coefficient | TCV <sub>OUT</sub>                   | (Notes 2, 3)                              |            |        | 30     | ppm/°C            |   |
| Line Regulation                        | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 2.7V to 12.6V           |            | 30     | 230    | μV/V              |   |
| Load Regulation                        | ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | I <sub>OUT</sub> = 0 to 4mA               |            | 0.1    | 0.6    | μV/μA             |   |
|  |                                      | I <sub>OUT</sub> = 0 to -1mA              |            | 2.5    | 6.2    |                   |   |
| Dropout Voltage (Note 5)               | V <sub>IN</sub> - V <sub>OUT</sub>   | I <sub>OUT</sub> = 0                      |            |        | 100    | mV                |   |
|  |                                      | I <sub>OUT</sub> = 4mA                    |            |        | 200    |                   |   |
| Output Short-Circuit Current           | I <sub>SC</sub>                      |   |            | 60     |        | mA                |   |
| Long-Term Stability                    | ΔV <sub>OUT</sub> /time              | 1000 hours at +25°C                       |            | 150    |        | ppm               |   |
| Thermal Hysteresis                     |                                      | (Note 4)                                  |            | 140    |        | ppm               |   |
| <b>DYNAMIC CHARACTERISTICS</b>         |                                      |   |            |        |        |                   |   |
| Noise Voltage                          | e <sub>OUT</sub>                     | f = 0.1Hz to 10Hz                         |            | 39     |        | μV <sub>P-P</sub> |   |
|  |                                      | f = 10Hz to 1kHz                          |            | 137    |        | μV <sub>RMS</sub> |   |
| Ripple Rejection                       | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 2.7V ±200mV, f = 120Hz  |            | 34     |        | dB                |   |
| Turn-On Settling Time                  | t <sub>R</sub>                       | To V <sub>OUT</sub> = 0.1% of final value |            | 700    |        | ms                |   |
| <b>INPUT</b>                           |                                      |   |            |        |        |                   |   |
| Supply Voltage Range                   | V <sub>IN</sub>                      |   | 2.7        |        | 12.6   | V                 |   |
| Supply Current                         | I <sub>IN</sub>                      |   |            |        | 5.75   | μA                |   |
| Change in Supply Current               | I <sub>IN</sub> /V <sub>IN</sub>     | V <sub>IN</sub> = 2.7V to 12.6V           |            |        | 1.5    | μA/V              |   |

# Ultra-Low-Power Precision Series Voltage Reference

## ELECTRICAL CHARACTERISTICS—MAX6029\_30 (V<sub>OUT</sub> = 3.000V)

(V<sub>IN</sub> = 3.2V, I<sub>OUT</sub> = 0, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                              | SYMBOL                               | CONDITIONS                                | MIN    | TYP    | MAX    | UNITS             |
|--|--------------------------------------|---|--------|--------|--------|-------------------|
| <b>OUTPUT</b>                          |                                      |   |        |        |        |                   |
| Output Voltage                         | V <sub>OUT</sub>                     | T <sub>A</sub> = +25°C                    | 2.9955 | 3.0000 | 3.0045 | V                 |
| Output Voltage Temperature Coefficient | TCV <sub>OUT</sub>                   | (Notes 2, 3)                              |        |        | 30     | ppm/°C            |
| Line Regulation                        | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 3.2V to 12.6V           |        | 15     | 250    | μV/V              |
| Load Regulation                        | ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | I <sub>OUT</sub> = 0 to 4mA               |        | 0.1    | 0.6    | μV/μA             |
|  |                                      | I <sub>OUT</sub> = 0 to -1mA              |        | 2.4    | 6.5    |                   |
| Dropout Voltage (Note 5)               | V <sub>IN</sub> - V <sub>OUT</sub>   | I <sub>OUT</sub> = 0                      |        |        | 100    | mV                |
|  |                                      | I <sub>OUT</sub> = 4mA                    |        |        | 200    |                   |
| Output Short-Circuit Current           | I <sub>SC</sub>                      |   |        | 60     |        | mA                |
| Long-Term Stability                    | ΔV <sub>OUT</sub> /time              | 1000 hours at +25°C                       |        | 150    |        | ppm               |
| Thermal Hysteresis                     |                                      | (Note 4)                                  |        | 140    |        | ppm               |
| <b>DYNAMIC CHARACTERISTICS</b>         |                                      |   |        |        |        |                   |
| Noise Voltage                          | e <sub>OUT</sub>                     | f = 0.1Hz to 10Hz                         |        | 39     |        | μV <sub>P-P</sub> |
|  |                                      | f = 10Hz to 1kHz                          |        | 161    |        | μV <sub>RMS</sub> |
| Ripple Rejection                       | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 3.2V ±200mV, f = 120Hz  |        | 37     |        | dB                |
| Turn-On Settling Time                  | t <sub>R</sub>                       | To V <sub>OUT</sub> = 0.1% of final value |        | 775    |        | μs                |
| <b>INPUT</b>                           |                                      |   |        |        |        |                   |
| Supply Voltage Range                   | V <sub>IN</sub>                      |   | 3.2    |        | 12.6   | V                 |
| Supply Current                         | I <sub>IN</sub>                      |   |        |        | 6.75   | μA                |
| Change in Supply Current               | I <sub>IN</sub> /V <sub>IN</sub>     | V <sub>IN</sub> = 3.2V to 12.6V           |        |        | 1.5    | μA/V              |

# Ultra-Low-Power Precision Series Voltage Reference

**MAX6029**

## ELECTRICAL CHARACTERISTICS—MAX6029\_33 (V<sub>OUT</sub> = 3.300V)

(V<sub>IN</sub> = 3.5V, I<sub>OUT</sub> = 0, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                              | SYMBOL                               | CONDITIONS  | MIN    | TYP    | MAX    | UNITS             |
|--|--------------------------------------|---|--------|--------|--------|-------------------|
| <b>OUTPUT</b>                          |                                      |   |        |        |        |                   |
| Output Voltage                         | V <sub>OUT</sub>                     | T <sub>A</sub> = +25°C                                | 3.2951 | 3.3000 | 3.3050 | V                 |
| Output Voltage Temperature Coefficient | TCV <sub>OUT</sub>                   | (Notes 2, 3)  |        |        | 30     | ppm/°C            |
| Line Regulation                        | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 3.5V to 12.6V                       |        | 30     | 270    | μV/V              |
| Load Regulation                        | ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | I <sub>OUT</sub> = 0 to 4mA                           |        | 0.1    | 0.6    | μV/μA             |
|  |                                      | I <sub>OUT</sub> = 0 to -1mA                          |        | 2.4    | 7      |                   |
| Dropout Voltage (Note 5)               | V <sub>IN</sub> - V <sub>OUT</sub>   | I <sub>OUT</sub> = 0                                  |        |        | 100    | mV                |
|  |                                      | I <sub>OUT</sub> = 4mA                                |        |        | 200    |                   |
| Output Short-Circuit Current           | I <sub>SC</sub>                      |   |        | 60     |        | mA                |
| Long-Term Stability                    | ΔV <sub>OUT</sub> /time              | 1000 hours at +25°C                                   |        | 150    |        | ppm               |
| Thermal Hysteresis                     |                                      | (Note 4)  |        | 140    |        | ppm               |
| <b>DYNAMIC CHARACTERISTICS</b>         |                                      |   |        |        |        |                   |
| Noise Voltage                          | e <sub>OUT</sub>                     | f = 0.1Hz to 10Hz                                     |        | 56     |        | μV <sub>P-P</sub> |
|  |                                      | f = 10Hz to 1kHz                                      |        | 174    |        | μV <sub>RMS</sub> |
| Ripple Rejection                       | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 3.5V ±200mV, f = 120Hz              |        | 38     |        | dB                |
| Turn-On Settling Time                  | t <sub>R</sub>                       | T <sub>o</sub> V <sub>OUT</sub> = 0.1% of final value |        | 1      |        | ms                |
| <b>INPUT</b>                           |                                      |   |        |        |        |                   |
| Supply Voltage Range                   | V <sub>IN</sub>                      |   | 3.5    |        | 12.6   | V                 |
| Supply Current                         | I <sub>IN</sub>                      |   |        |        | 7.25   | μA                |
| Change in Supply Current               | I <sub>IN</sub> /V <sub>IN</sub>     | V <sub>IN</sub> = 3.5V to 12.6V                       |        |        | 1.5    | μA/V              |

# Ultra-Low-Power Precision Series Voltage Reference

**MAX6029**

## ELECTRICAL CHARACTERISTICS—MAX6029\_41 (V<sub>OUT</sub> = 4.096V)

(V<sub>IN</sub> = 4.3V, I<sub>OUT</sub> = 0, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                              | SYMBOL                               | CONDITIONS                                | MIN        | TYP    | MAX    | UNITS             |   |
|--|--------------------------------------|---|------------|--------|--------|-------------------|---|
| <b>OUTPUT</b>                          |                                      |   |            |        |        |                   |   |
| Output Voltage                         | V <sub>OUT</sub>                     | T <sub>A</sub> = +25°C                    | MAX6029EUK | 4.0899 | 4.0960 | 4.1021            | V |
|  |                                      |   | MAX6029ESA | 4.088  | 4.096  | 4.104             |   |
| Output Voltage Temperature Coefficient | TCV <sub>OUT</sub>                   | (Notes 2, 3)                              |            |        | 30     | ppm/°C            |   |
| Line Regulation                        | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 4.3V to 12.6V           |            | 30     | 310    | μV/V              |   |
| Load Regulation                        | ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | I <sub>OUT</sub> = 0 to 4mA               |            | 0.1    | 0.6    | μV/μA             |   |
|  |                                      | I <sub>OUT</sub> = 0 to -1mA              |            | 2.5    | 8.5    |                   |   |
| Dropout Voltage (Note 5)               | V <sub>IN</sub> - V <sub>OUT</sub>   | I <sub>OUT</sub> = 0                      |            |        | 100    | mV                |   |
|  |                                      | I <sub>OUT</sub> = 4mA                    |            |        | 200    |                   |   |
| Output Short-Circuit Current           | I <sub>SC</sub>                      |   |            | 60     |        | mA                |   |
| Long-Term Stability                    | ΔV <sub>OUT</sub> /time              | 1000 hours at +25°C                       |            | 150    |        | ppm               |   |
| Thermal Hysteresis                     |                                      | (Note 4)                                  |            | 140    |        | ppm               |   |
| <b>DYNAMIC CHARACTERISTICS</b>         |                                      |   |            |        |        |                   |   |
| Noise Voltage                          | e <sub>OUT</sub>                     | f = 0.1Hz to 10Hz                         |            | 72     |        | μV <sub>P-P</sub> |   |
|  |                                      | f = 10Hz to 1kHz                          |            | 210    |        | μV <sub>RMS</sub> |   |
| Ripple Rejection                       | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 4.3V ±200mV, f = 120Hz  |            | 36     |        | dB                |   |
| Turn-On Settling Time                  | t <sub>R</sub>                       | To V <sub>OUT</sub> = 0.1% of final value |            | 1.2    |        | ms                |   |
| <b>INPUT</b>                           |                                      |   |            |        |        |                   |   |
| Supply Voltage Range                   | V <sub>IN</sub>                      |   | 4.3        |        | 12.6   | V                 |   |
| Supply Current                         | I <sub>IN</sub>                      |   |            |        | 8.75   | μA                |   |
| Change in Supply Current               | I <sub>IN</sub> /V <sub>IN</sub>     | V <sub>IN</sub> = 4.3V to 12.6V           |            |        | 1.5    | μA/V              |   |

# Ultra-Low-Power Precision Series Voltage Reference

**MAX6029**

## ELECTRICAL CHARACTERISTICS—MAX6029\_50 (V<sub>OUT</sub> = 5.000V)

(V<sub>IN</sub> = 5.2V, I<sub>OUT</sub> = 0, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                              | SYMBOL                               | CONDITIONS                                | MIN    | TYP    | MAX    | UNITS             |
|--|--------------------------------------|---|--------|--------|--------|-------------------|
| <b>OUTPUT</b>                          |                                      |   |        |        |        |                   |
| Output Voltage                         | V <sub>OUT</sub>                     | T <sub>A</sub> = +25°C                    | 4.9925 | 5.0000 | 5.0075 | V                 |
| Output Voltage Temperature Coefficient | TCV <sub>OUT</sub>                   | (Notes 2, 3)                              |        |        | 30     | ppm/°C            |
| Line Regulation                        | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 5.2V to 12.6V           |        | 34     | 375    | μV/V              |
| Load Regulation                        | ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | I <sub>OUT</sub> = 0 to 4mA               |        | 0.3    | 0.8    | μV/μA             |
|  |                                      | I <sub>OUT</sub> = 0 to -1mA              |        | 3.3    | 9      |                   |
| Dropout Voltage (Note 5)               | V <sub>IN</sub> - V <sub>OUT</sub>   | I <sub>OUT</sub> = 0                      |        |        | 100    | mV                |
|  |                                      | I <sub>OUT</sub> = 4mA                    |        |        | 200    |                   |
| Output Short-Circuit Current           | I <sub>SC</sub>                      |   |        | 60     |        | mA                |
| Long-Term Stability                    | ΔV <sub>OUT</sub> /time              | 1000 hours at +25°C                       |        | 150    |        | ppm               |
| Thermal Hysteresis                     |                                      | (Note 4)                                  |        | 140    |        | ppm               |
| <b>DYNAMIC CHARACTERISTICS</b>         |                                      |   |        |        |        |                   |
| Noise Voltage                          | e <sub>OUT</sub>                     | f = 0.1Hz to 10Hz                         |        | 90     |        | μV <sub>P-P</sub> |
|  |                                      | f = 10Hz to 1kHz                          |        | 245    |        | μV <sub>RMS</sub> |
| Ripple Rejection                       | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 5.2V ±200mV, f = 120Hz  |        | 38     |        | dB                |
| Turn-On Settling Time                  | t <sub>R</sub>                       | To V <sub>OUT</sub> = 0.1% of final value |        | 1.4    |        | ms                |
| <b>INPUT</b>                           |                                      |   |        |        |        |                   |
| Supply Voltage Range                   | V <sub>IN</sub>                      |   | 5.2    |        | 12.6   | V                 |
| Supply Current                         | I <sub>IN</sub>                      |   |        |        | 10.5   | μA                |
| Change in Supply Current               | I <sub>IN</sub> /V <sub>IN</sub>     | V <sub>IN</sub> = 5.2V to 12.6V           |        |        | 1.5    | μA/V              |

**Note 1:** MAX6029 is 100% production tested at T<sub>A</sub> = +25°C and is guaranteed by design for T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub> as specified.

**Note 2:** Temperature coefficient is defined by box method: (V<sub>MAX</sub> - V<sub>MIN</sub>)/(ΔT × V<sub>+25°C</sub>).

**Note 3:** Not production tested. Guaranteed by design.










**Note 4:** Thermal hysteresis is defined as the change in T<sub>A</sub> = +25°C output voltage before and after temperature cycling of the device (from T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>). Initial measurement at T<sub>A</sub> = +25°C is followed by temperature cycling the device to T<sub>A</sub> = +85°C then to T<sub>A</sub> = -40°C and another measurement at T<sub>A</sub> = +25°C is compared to the original measurement at T<sub>A</sub> = +25°C.

**Note 5:** Dropout voltage is the minimum input voltage at which V<sub>OUT</sub> changes by 0.1% from V<sub>OUT</sub> at rated V<sub>IN</sub> and is guaranteed by Load Regulation Test.

# Ultra-Low-Power Precision Series Voltage Reference

## Typical Operating Characteristics

( $V_{IN} = 2.5V$  for MAX6029EUK21,  $V_{IN} = 3.2V$  for MAX6029EUK30, and  $V_{IN} = 5.2V$  for MAX6029EUK50,  $I_{OUT} = 0$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

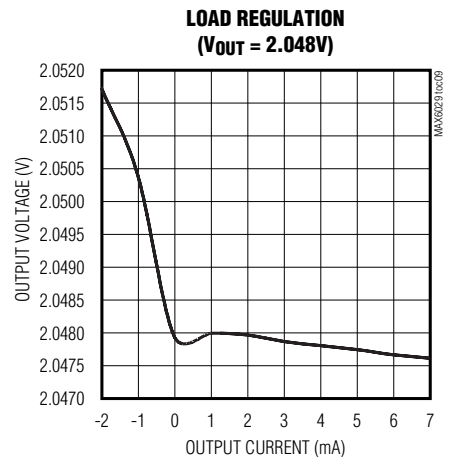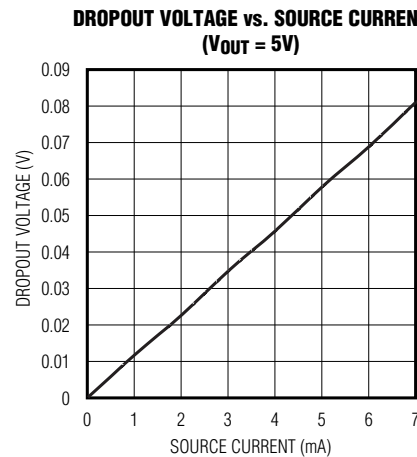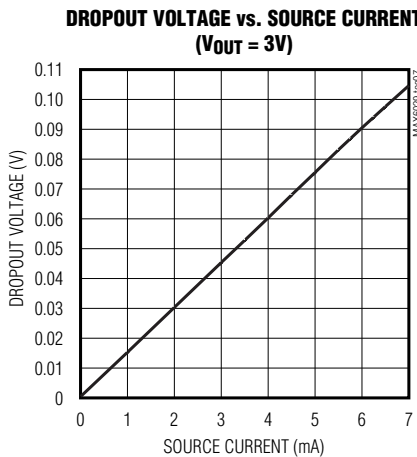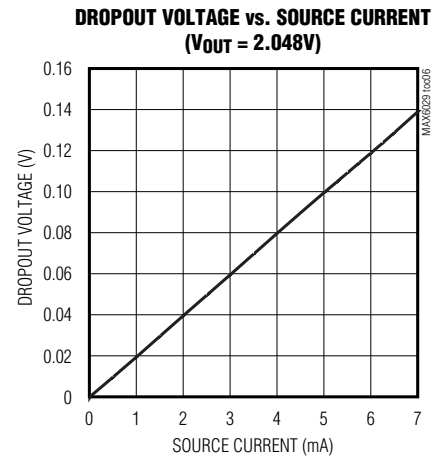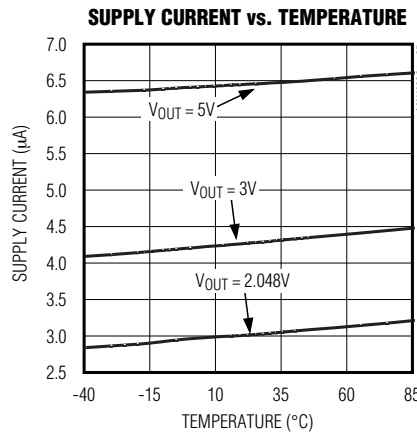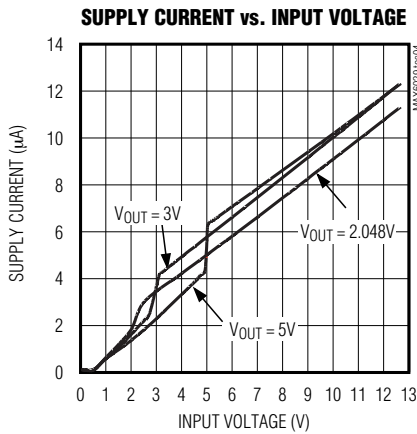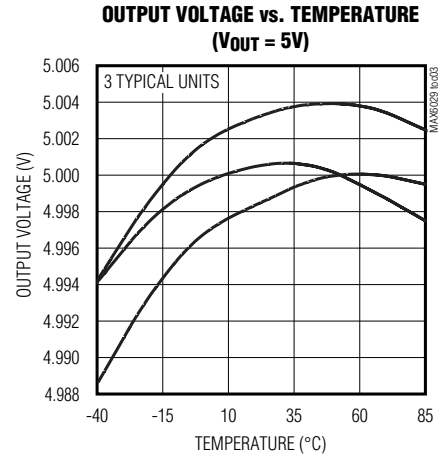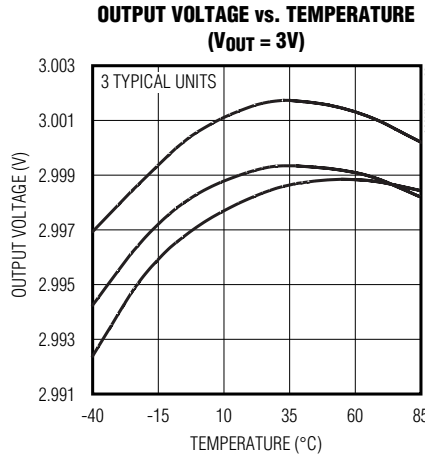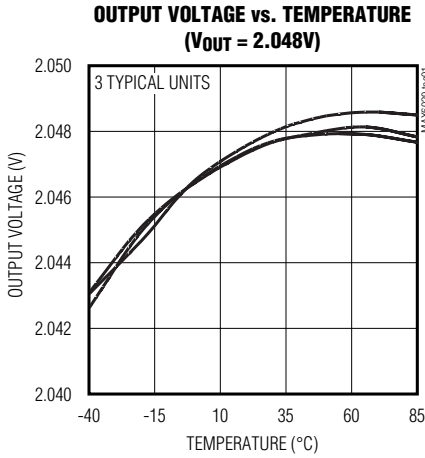












# Ultra-Low-Power Precision Series Voltage Reference

MAX6029

## Typical Operating Characteristics (continued)







( $V_{IN} = 2.5V$  for MAX6029EUK21,  $V_{IN} = 3.2V$  for MAX6029EUK30, and  $V_{IN} = 5.2V$  for MAX6029EUK50,  $I_{OUT} = 0$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

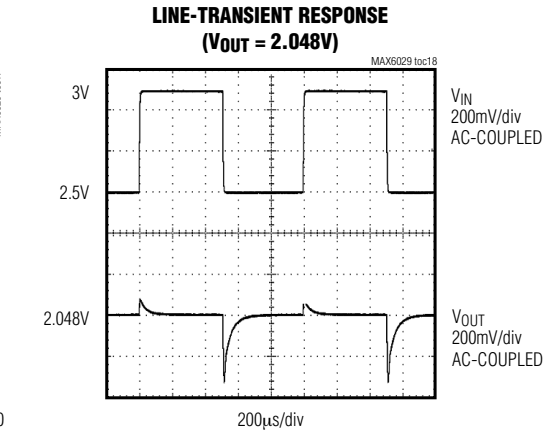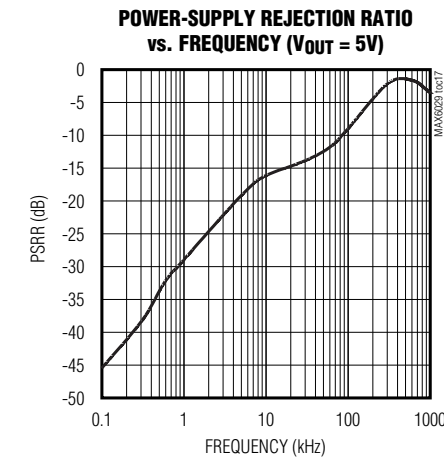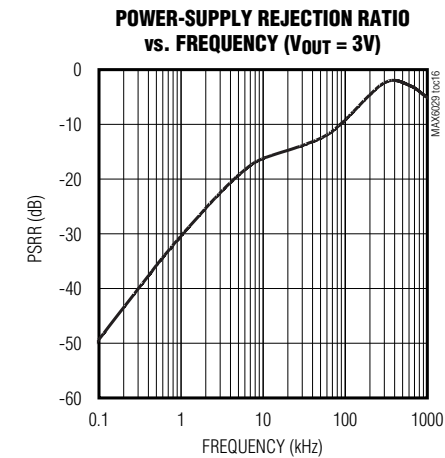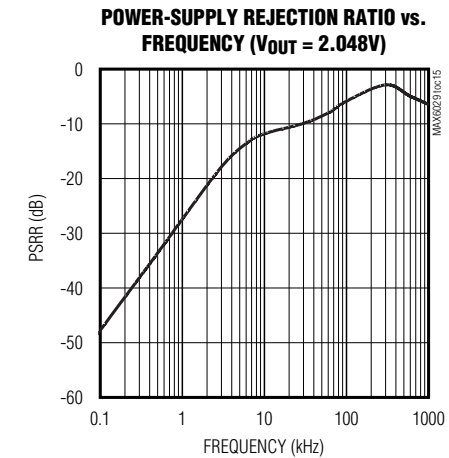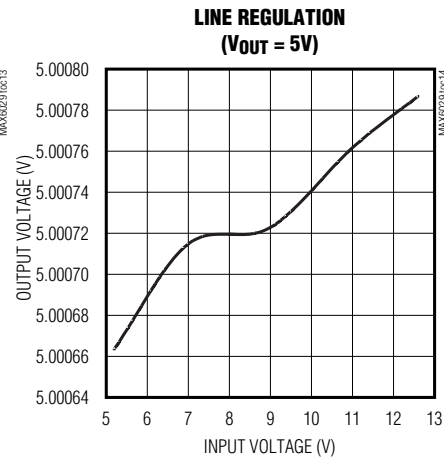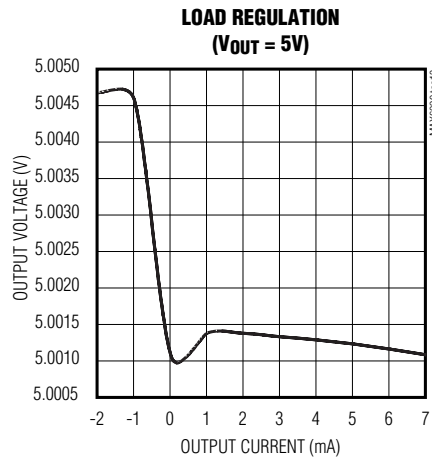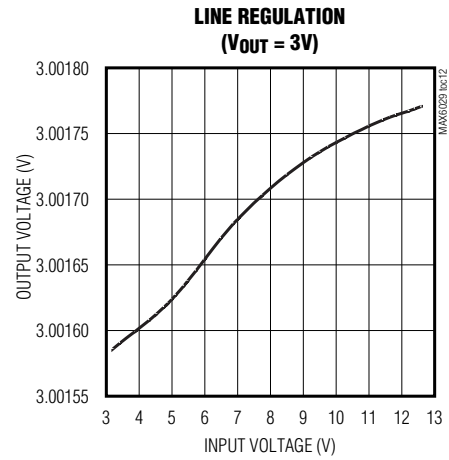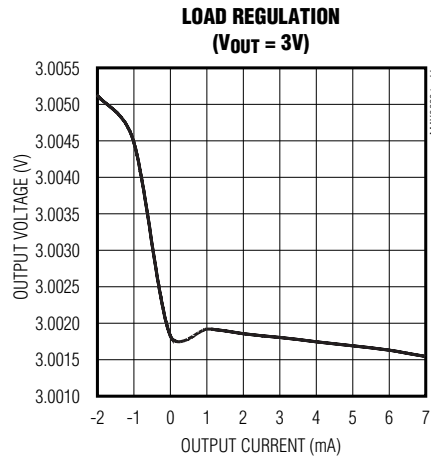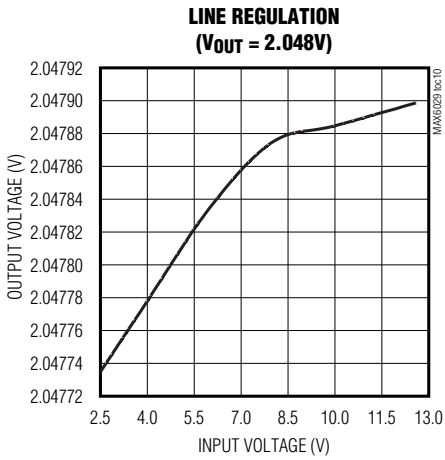

# Ultra-Low-Power Precision Series Voltage Reference

## Typical Operating Characteristics (continued)

( $V_{IN} = 2.5V$  for MAX6029EUK21,  $V_{IN} = 3.2V$  for MAX6029EUK30, and  $V_{IN} = 5.2V$  for MAX6029EUK50,  $I_{OUT} = 0$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

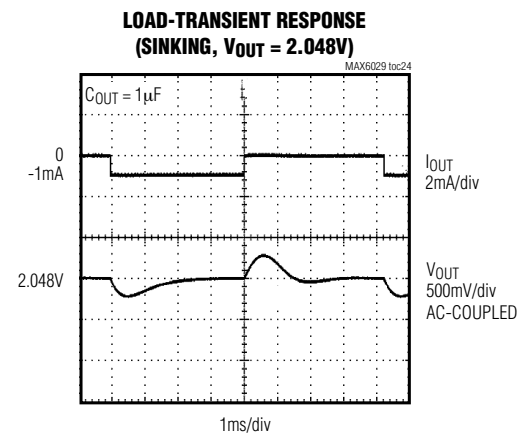
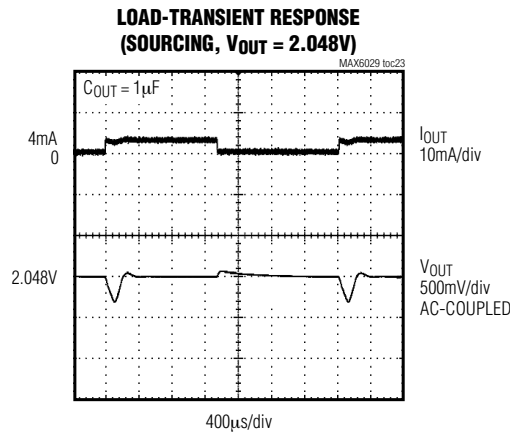
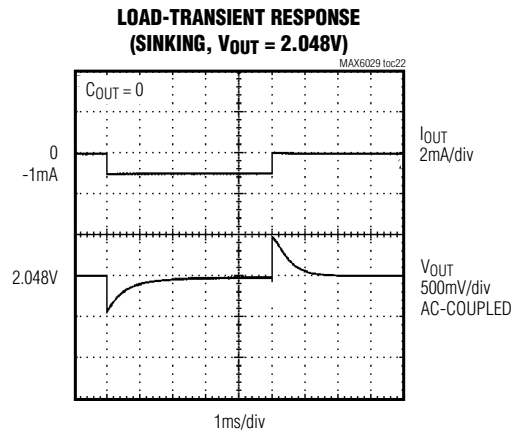
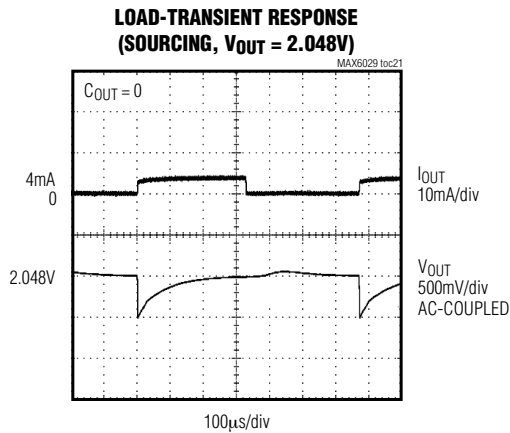
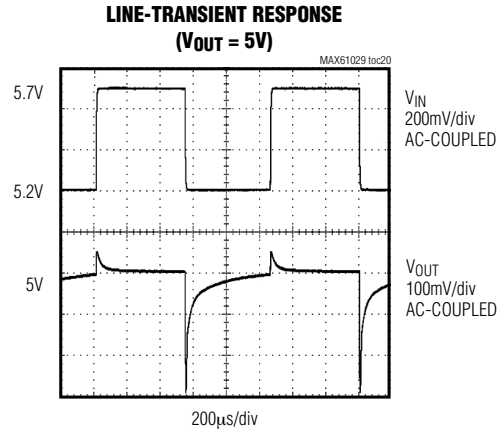
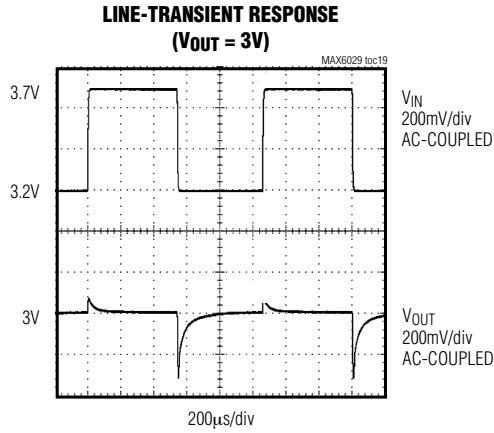


# Ultra-Low-Power Precision Series Voltage Reference

MAX6029

## Typical Operating Characteristics (continued)

( $V_{IN} = 2.5V$  for MAX6029EUK21,  $V_{IN} = 3.2V$  for MAX6029EUK30, and  $V_{IN} = 5.2V$  for MAX6029EUK50,  $I_{OUT} = 0$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

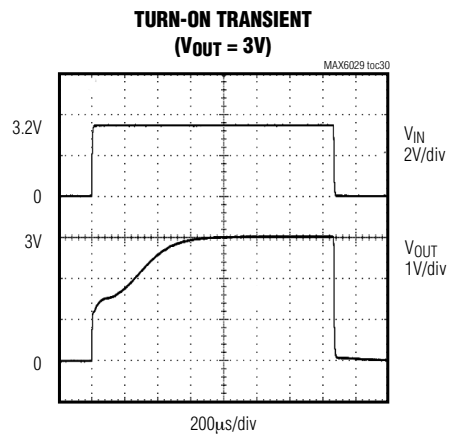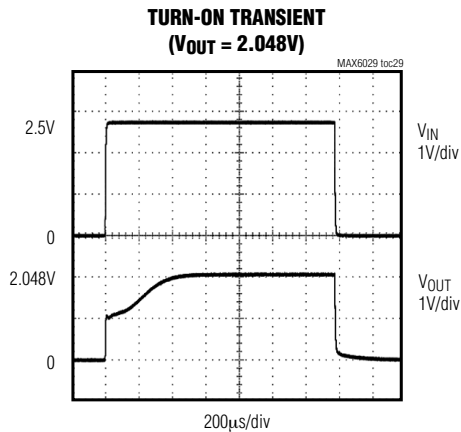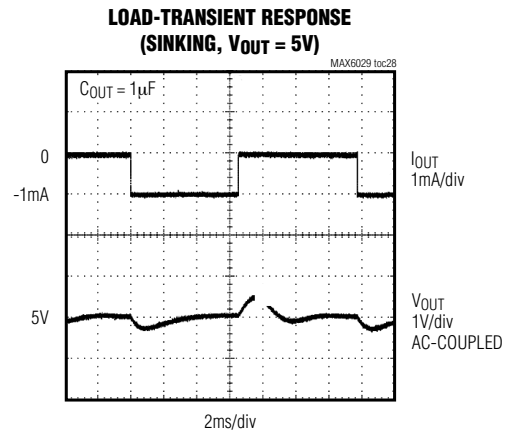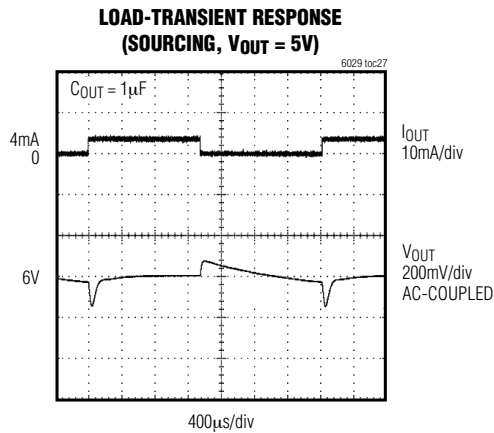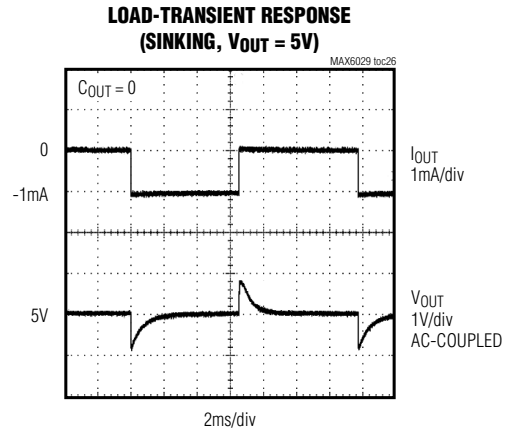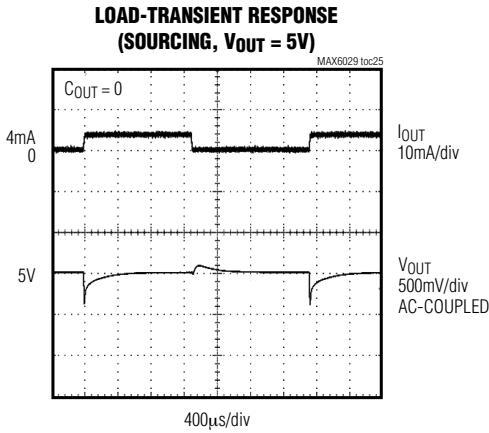


# Ultra-Low-Power Precision Series Voltage Reference


## Typical Operating Characteristics (continued)

( $V_{IN} = 2.5V$  for MAX6029EUK21,  $V_{IN} = 3.2V$  for MAX6029EUK30, and  $V_{IN} = 5.2V$  for MAX6029EUK50,  $I_{OUT} = 0$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)


**TURN-ON TRANSIENT**  
( $V_{OUT} = 5V$ )

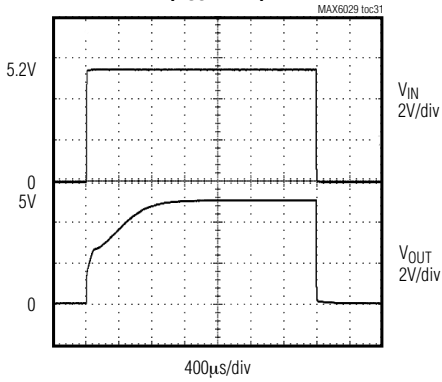


**0.1Hz TO 10Hz OUTPUT NOISE**  
( $V_{OUT} = 2.048V$ )

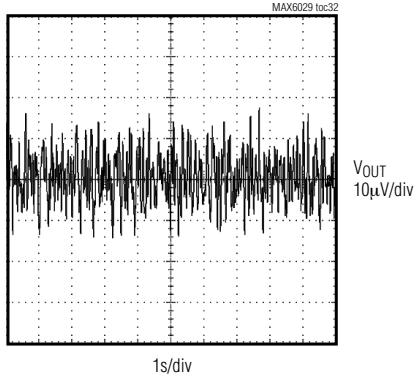


**0.1Hz TO 10Hz OUTPUT NOISE**  
( $V_{OUT} = 3V$ )

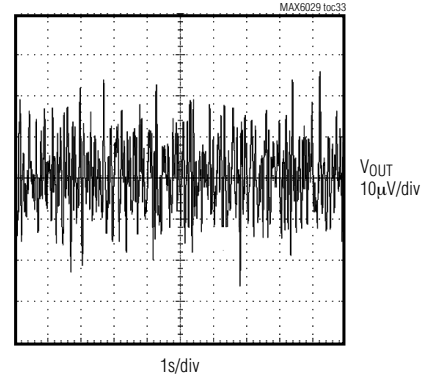


**0.1Hz TO 10Hz OUTPUT NOISE**  
( $V_{OUT} = 5V$ )

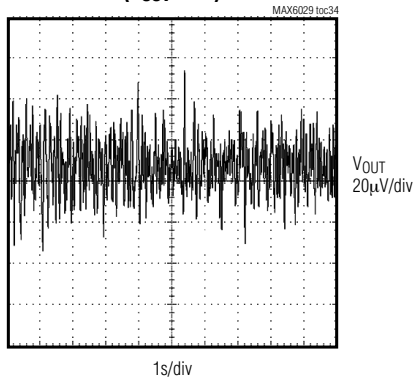


**NOISE vs. FREQUENCY**  
( $V_{OUT} = 2.048V$ )

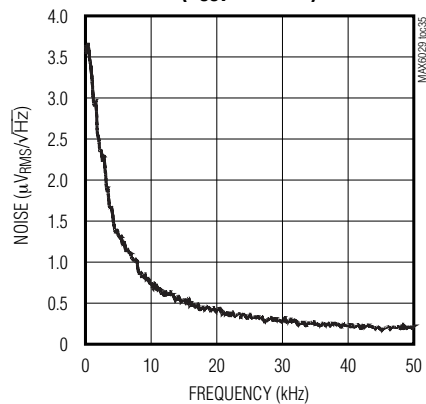

**NOISE vs. FREQUENCY**  
( $V_{OUT} = 3V$ )

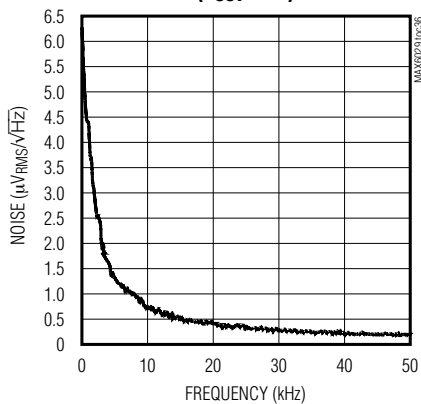

**NOISE vs. FREQUENCY**  
( $V_{OUT} = 5V$ )

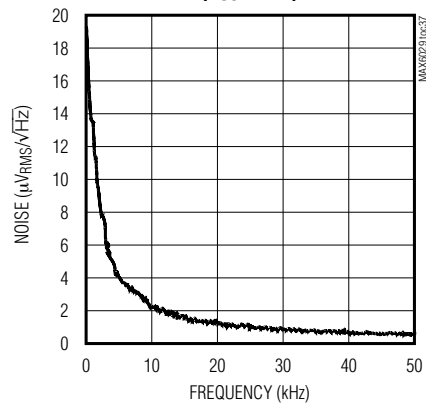

# Ultra-Low-Power Precision Series Voltage Reference

MAX6029

## Pin Description

| PIN   |               | NAME | FUNCTION   |
|-------|---------------|------|--|
| SOT23 | SO            |      |  |
| 1     | 2             | IN   | Positive Voltage Supply                                |
| 2     | 4             | GND  | Ground   |
| 3, 4  | 1, 3, 5, 7, 8 | N.C. | No Connection. Leave unconnected or connect to ground. |
| 5     | 6             | OUT  | Reference Output                                       |

## Applications Information

### Input Bypassing

The MAX6029 does not require an input bypass capacitor. For improved transient performance, bypass the input to ground with a 0.1 $\mu$ F ceramic capacitor. Place the capacitor as close to IN as possible.

### Load Capacitance

The MAX6029 does not require an output capacitor for stability. The MAX6029 is stable driving capacitive loads from 0 to 100pF and 0.1 $\mu$ F to 10 $\mu$ F when sourcing current and from 0 to 0.4 $\mu$ F when sinking current. In applications where the load or the supply can experience step changes, an output capacitor reduces the amount of overshoot (undershoot) and improves the circuit's transient response. Many applications do not require an external capacitor, and the MAX6029 offers a significant advantage in applications where board space is critical.

### Supply Current

The quiescent supply current of the series-mode MAX6029 is very small, 5.25 $\mu$ A (max), and is very stable against changes in the supply voltage with only

1.5 $\mu$ A/V (max) variation with supply voltage. The MAX6029 family draws load current from the input voltage source only when required, so supply current is not wasted and efficiency is maximized at all input voltages. This improved efficiency reduces power dissipation and extends battery life.

### Output Thermal Hysteresis

Output thermal hysteresis is the change of the output voltage at  $T_A = +25^\circ\text{C}$  before and after the device is cycled over its entire operating temperature range. Hysteresis is caused by differential package stress appearing across the device.

### Temperature Coefficient vs. Operating Temperature Range for a 1LSB Maximum Error

In a data converter application, the reference voltage of the converter must stay within a certain limit to keep the error in the data converter smaller than the resolution limit through the operating temperature range. Figure 1 shows the maximum allowable reference voltage temperature coefficient to keep the conversion error to less than 1 LSB, as a function of the operating temperature range ( $T_{MAX} - T_{MIN}$ ) with the converter resolution as a parameter. The graph assumes the reference-voltage temperature coefficient as the only parameter affecting accuracy.

In reality, the absolute static accuracy of a data converter is dependent on the combination of many parameters such as integral nonlinearity, differential nonlinearity, offset error, gain error, as well as voltage reference changes.

### Turn-On Time

These devices turn on and settle to within 0.1% of their final value in less than 1ms. The turn-on time increases when heavily loaded and operating close to dropout.


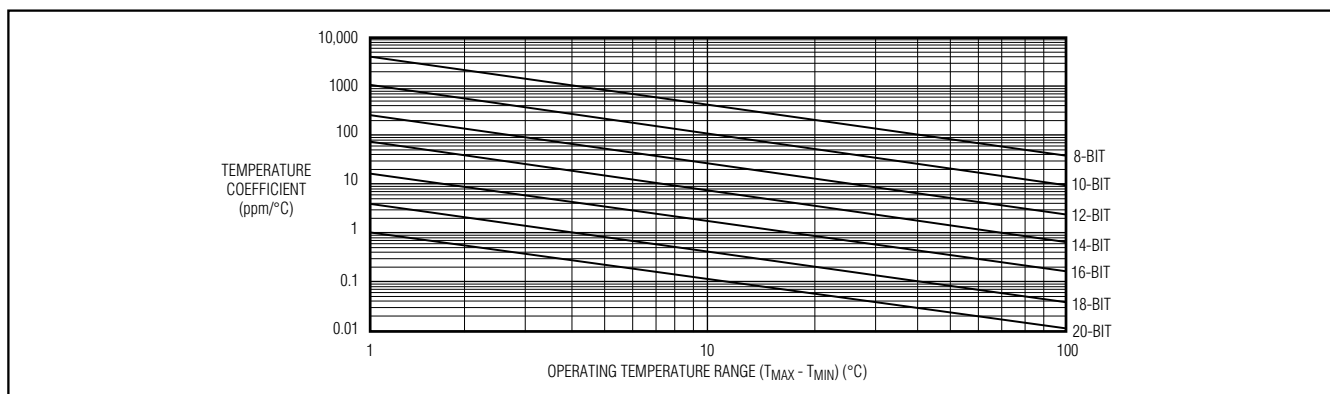


Figure 1. Temperature Coefficient vs. Operating Temperature Range for a 1 LSB Maximum Error

# Ultra-Low-Power Precision Series Voltage Reference

## Typical Operating Circuit

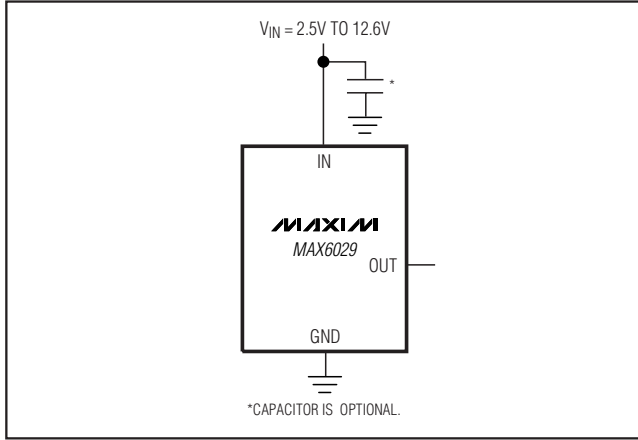

## Chip Information

TRANSISTOR COUNT: 30  
PROCESS: BICMOS



# Ultra-Low-Power Precision Series Voltage Reference

## Package Information


(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

**MAX6029**

SOT-23 5L, EPS

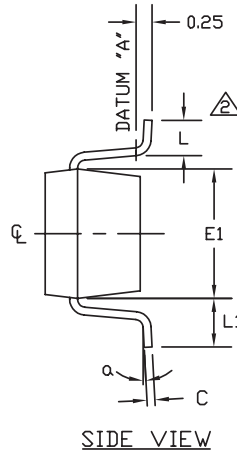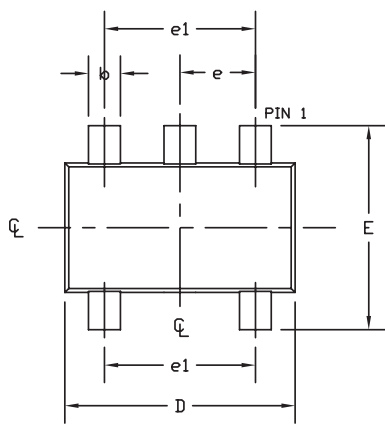

| SYMBOL                | MIN       | NOM   | MAX  |
|-----------------------|-----------|-------|------|
| A                     | 0.90      | 1.25  | 1.45 |
| A1                    | 0.00      | 0.05  | 0.15 |
| A2                    | 0.90      | 1.10  | 1.30 |
| b                     | 0.35      | 0.40  | 0.50 |
| C                     | 0.08      | 0.15  | 0.20 |
| D                     | 2.80      | 2.90  | 3.00 |
| E                     | 2.60      | 2.80  | 3.00 |
| E1                    | 1.50      | 1.625 | 1.75 |
| L                     | 0.35      | 0.45  | 0.60 |
| L1                    | 0.60 REF  |       |      |
| e                     | 0.95 BSC. |       |      |
| e1                    | 1.90 BSC. |       |      |
| a                     | 0°        | 2.5°  | 8°   |
| PKG CODES: U5-1, U5-2 |           |       |      |

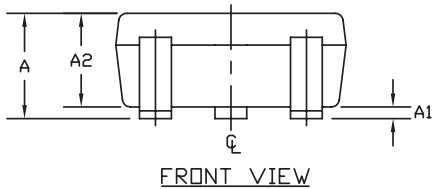

**NOTES:**

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. FOOT LENGTH MEASURED AT INTERCEPT POINT BETWEEN DATUM A & LEAD SURFACE.
3. PACKAGE OUTLINE EXCLUSIVE OF MOLD FLASH & METAL BURR. MOLD FLASH, PROTRUSION OR METAL BURR SHOULD NOT EXCEED 0.25 MM.
4. PACKAGE OUTLINE INCLUSIVE OF SOLDER PLATING.
5. MEETS JEDEC MO17B, VARIATION AA.
6. LEADS TO BE COPLANAR WITHIN 0.10 mm.
7. SOLDER THICKNESS MEASURED AT FLAT SECTION OF LEAD BETWEEN 0.08mm AND 0.15mm FROM LEAD TIP.




|  |                                 |
|--|---------------------------------|
|  |                                 |
| <small>PROPRIETARY INFORMATION</small> |                                 |
| TITLE:<br>PACKAGE OUTLINE, SOT-23, 5L  |                                 |
| APPROVAL                               | DOCUMENT CONTROL NO.<br>21-0057 |
| REV.<br>F                              | 1/1                             |

# Ultra-Low-Power Precision Series Voltage Reference

## Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

SOICN .EPS

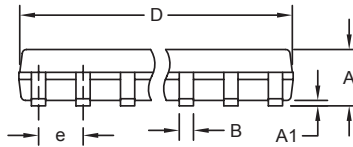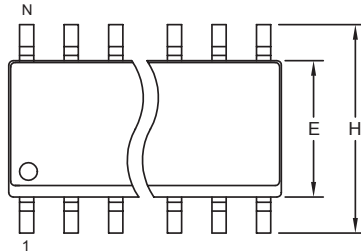

| DIM | INCHES    |       | MILLIMETERS |      |
|-----|-----------|-------|-------------|------|
|     | MIN       | MAX   | MIN         | MAX  |
| A   | 0.053     | 0.069 | 1.35        | 1.75 |
| A1  | 0.004     | 0.010 | 0.10        | 0.25 |
| B   | 0.014     | 0.019 | 0.35        | 0.49 |
| C   | 0.007     | 0.010 | 0.19        | 0.25 |
| e   | 0.050 BSC |       | 1.27 BSC    |      |
| E   | 0.150     | 0.157 | 3.80        | 4.00 |
| H   | 0.228     | 0.244 | 5.80        | 6.20 |
| L   | 0.016     | 0.050 | 0.40        | 1.27 |

VARIATIONS:

| DIM | INCHES |       | MILLIMETERS |       | N  | MS012 |
|-----|--------|-------|-------------|-------|----|-------|
|     | MIN    | MAX   | MIN         | MAX   |    |       |
| D   | 0.189  | 0.197 | 4.80        | 5.00  | 8  | AA    |
| D   | 0.337  | 0.344 | 8.55        | 8.75  | 14 | AB    |
| D   | 0.386  | 0.394 | 9.80        | 10.00 | 16 | AC    |

NOTES:

1. D&E DO NOT INCLUDE MOLD FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED 0.15mm (.006").
3. LEADS TO BE COPLANAR WITHIN 0.10mm (.004").
4. CONTROLLING DIMENSION: MILLIMETERS.
5. MEETS JEDEC MS012.
6. N = NUMBER OF PINS.

|  |  |
|--|--|
|  |  |
| <small>PROPRIETARY INFORMATION</small><br>TITLE:<br><b>PACKAGE OUTLINE, .150" SOIC</b> |  |
| APPROVAL   | DOCUMENT CONTROL NO.<br><b>21-0041</b> |
|  | REV. <b>B</b> 1/1                      |

## Revision History

Pages changed at Rev 1: 1, 2, 13, 15, 16  
 Pages changed at Rev 2: 1, 3, 6, 16

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

16 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**