


Metal Film, Cylindrical Resistors

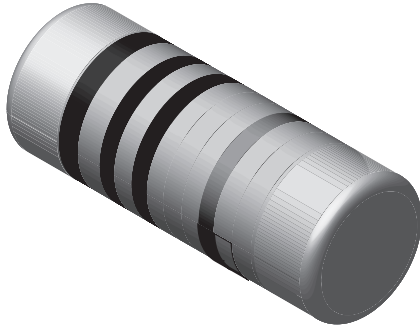

FEATURES

- Stable metal film on high quality ceramic
- Low TC and tight tolerances
- Excellent stability in different environmental conditions
- Force fitted steel caps, tin plated on nickel barrier
- Reliable solderable terminations to facilitate surface mounting

STANDARD ELECTRICAL SPECIFICATIONS						
MODEL	POWER RATING $P_{70^{\circ}\text{C}}^{1)}$ W	LIMITING ELEMENT VOLTAGE MAX ²⁾ V_{\equiv}	TEMPERATURE COEFFICIENT ppm/K	TOLERANCE %	RESISTANCE RANGE Ω	E-SERIES
SMM0204-MS1	0.25	200	15	0.1 0.25 0.5	43R – 221K 22R – 221K 10R – 221K	24 – 192 24 – 192 24 – 192
SMM0204-MS1	0.25	200	25	0.1 0.25 0.5	43R – 511K 22R – 511K 10R – 1M0	24 – 192 24 – 192 24 – 192
SMM0204-MS1	0.25	200	50	0.5 1	10R – 1M0 R82 – 10M	24 – 192 24 – 96
SMM0204-MS1	0.25	200	100	5	R22 – 10M	24
SMM0204HF MS1 ⁴⁾	0.25	200	50	1	10R – 1K0 ³⁾	96
Zero-Ohm-Resistor: OMM0204-MS1 $R_{\text{max}} = 10\text{m}\Omega$ $I_{\text{max}} = 2\text{A}$						

1) Power rating depends on the maximum temperature at the solder point, the component placement density and the substrate material

2) Rated voltage: $\sqrt{P \times R}$

3) Values below 10 % on request

4) Low inductive trim for high frequency application

• Further values and tolerances on request


• Coating:
 Light green for TC= 100ppm/K, 50ppm/K and zero ohm resistor
 Pink TC = 25ppm/K
 Violet TC = 15ppm/K
 Beige HF version

• Marking : see appropriate catalog or web page

• Zero ohm resistor has a black band only

ORDERING INFORMATION				
SMM0204-MS1	50	562R	1%	B0
MODEL	TC ppm / K	RESISTANCE VALUE Ω	TOLERANCE \pm %	PACKAGING B0-Blistertape 10000 pcs

DIMENSIONS

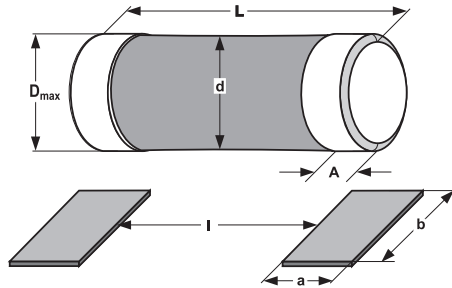

MODEL	DIMENSIONS [in millimeters]				
	D _{max}	d *	L	A _{max}	A _{min}
SMM0204-MS1	1.4	D -0.15	3.6 - 0.15	0.85	0.5



*d measured in the middle of the resistor









MODEL	SOLDER PAD DIMENSIONS [in millimeters]					
	REFLOW SOLDERING			WAVE SOLDERING		
	a	b	l	a	b	l
SMM0204-MS1	1.0	1.6	2.2	1.2	1.6	2.2






TECHNICAL SPECIFICATIONS		
PARAMETER	UNIT	SMM0204 – MS1
Rated Dissipation at 70°C	W	0.25
Limiting Element Voltage ²⁾	V _≅	200
Insulation Voltage (1 min)	V _{dc/ac peak}	> 300
Thermal Resistance ¹⁾	K/W	≤ 220
Insulation Resistance	Ω	≥ 10 ¹⁰
Category Temperature Range	°C	- 55 / + 125 (+ 155)
Failure Rate	10 ⁻⁹ /h	< 1
Weight / 1000pcs	g	18


¹⁾ Based on measurements on test board acc. to EN 140000

²⁾ Rated voltage: $\sqrt{P \times R}$

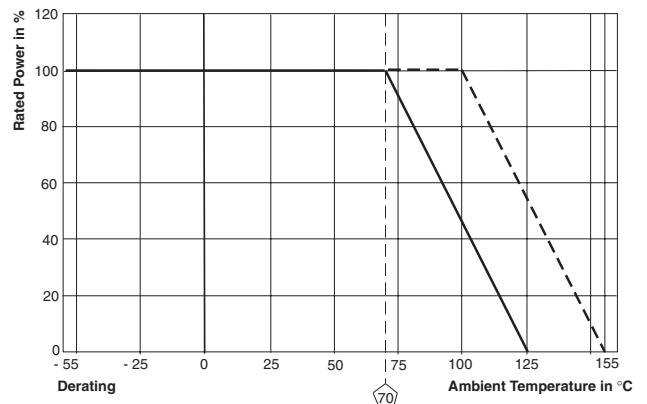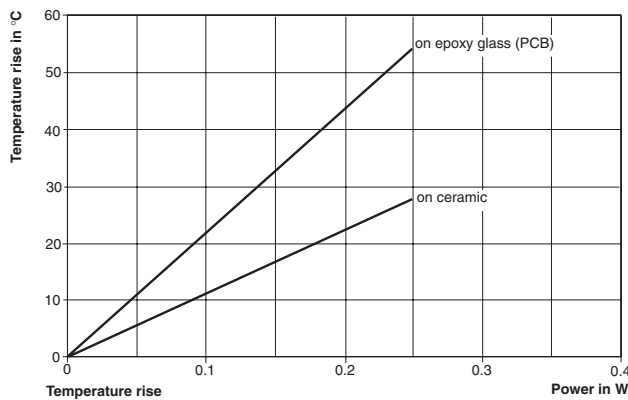

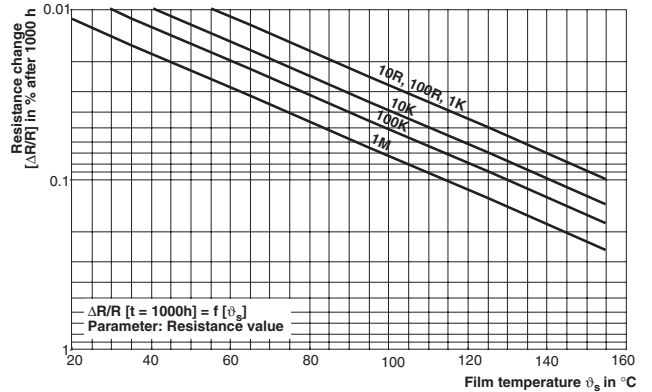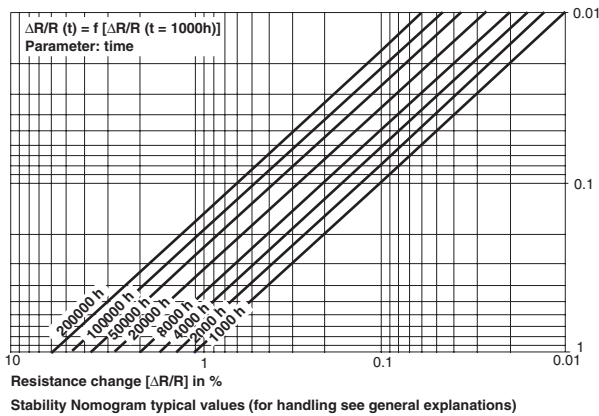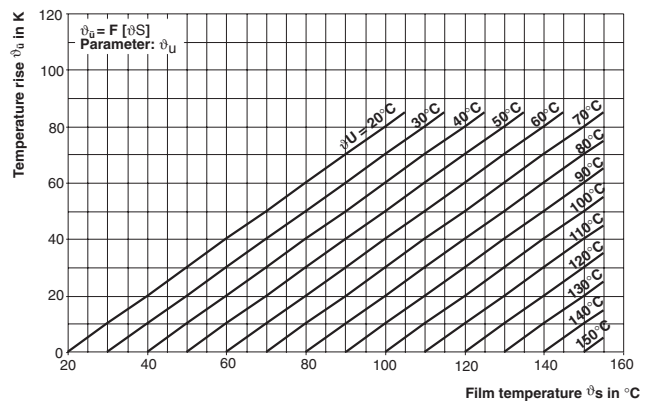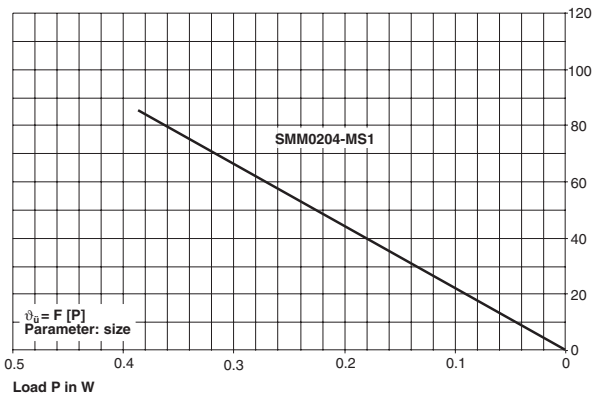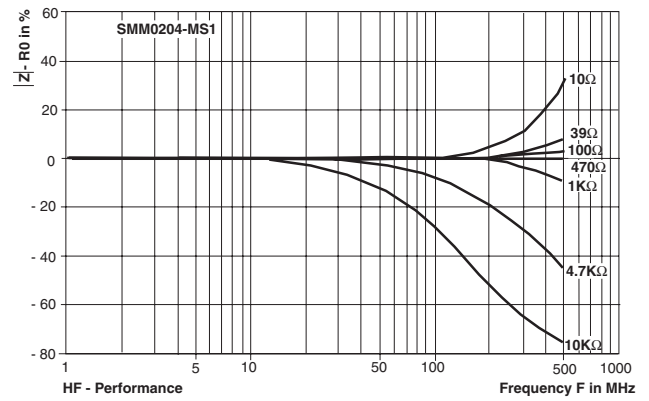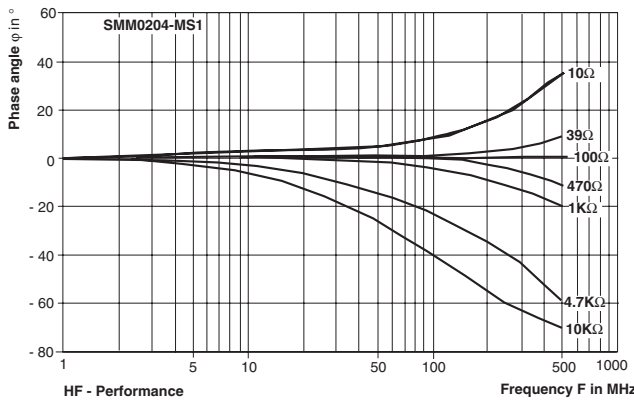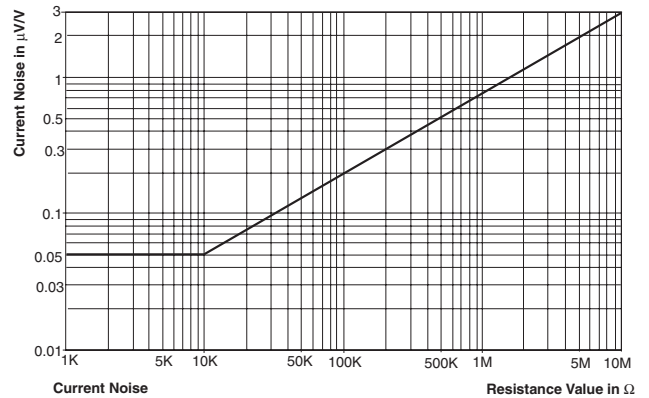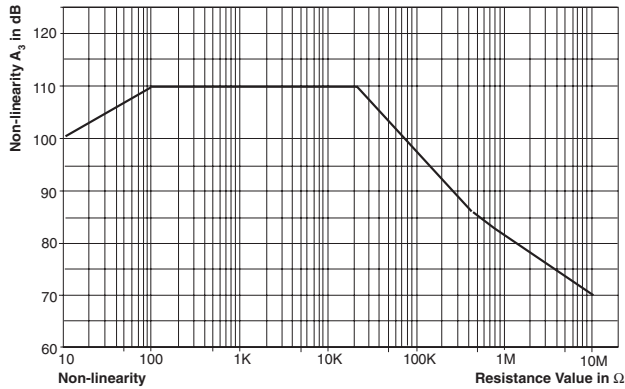

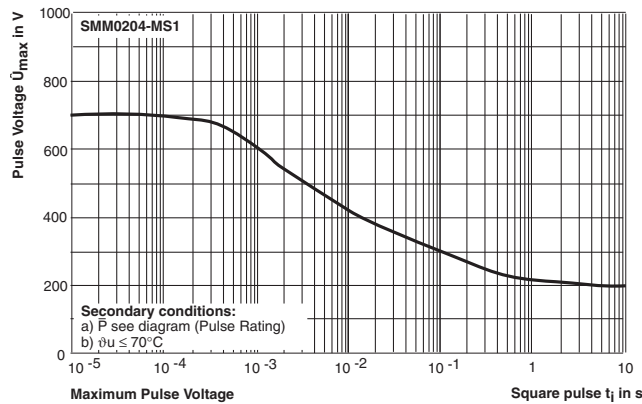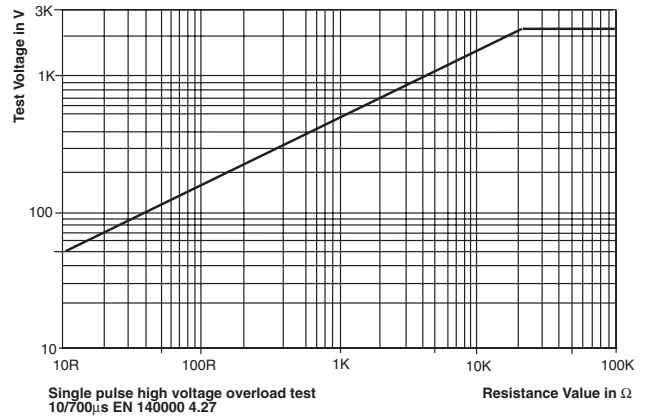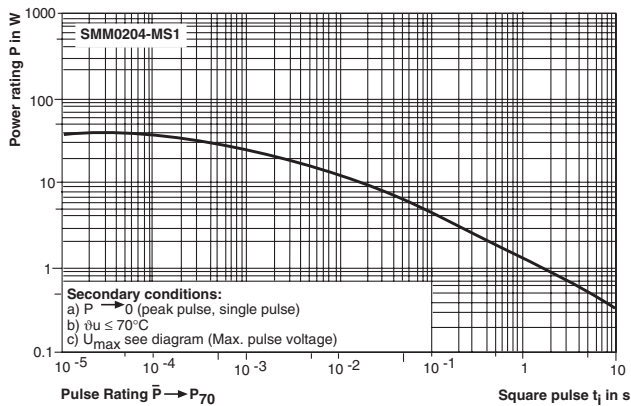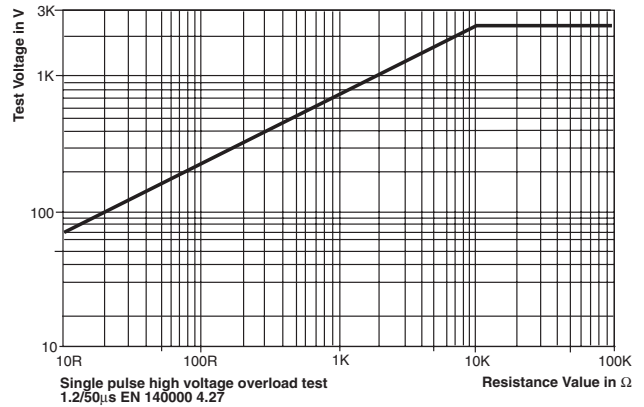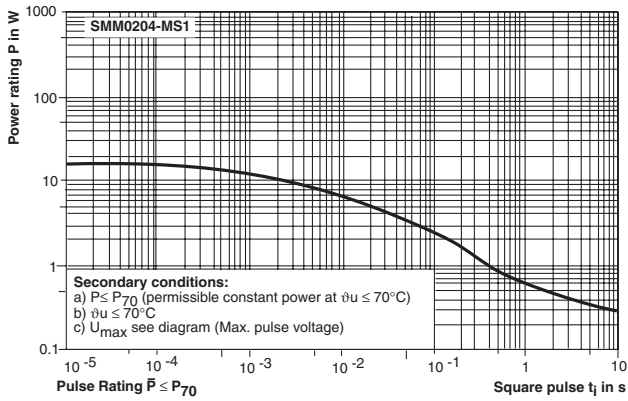

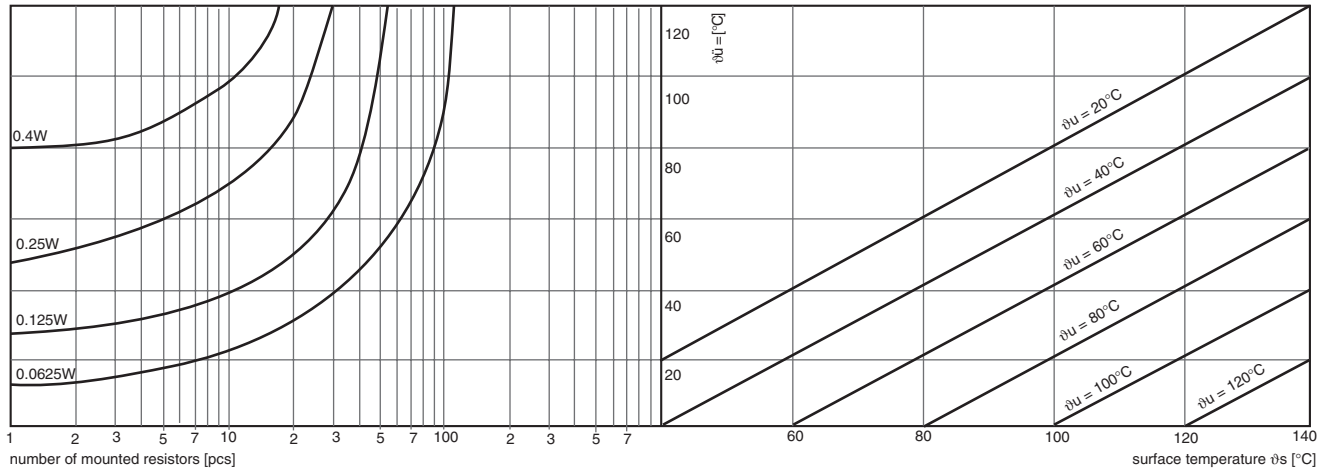

Testboard FR4 (50 x 50 x 1.6)mm

PACKAGING								
MODEL	REEL				BULK			
	TAPE WIDTH	DIAMETER	PIECES / REEL	CODE	BULK FEEDING MAGAZINE PIECES / MAGAZINE		LOOSE IN PLASTIC CONTAINER PIECES / CONTAINER	
					PIECES	CODE	PIECES	CODE
SMM0204-MS1	8mm Blisertape	180mm	1000	B1*	3000	M3	1000	L1
SMM0204HF-MS1		180mm	2500	BE				
		180mm	3000	B3				
OMM0204-MS1		330mm	10000	B0				
							5000	L5

*For \leq TC25 and Tol. \leq 0.5% only



PERFORMANCE		
TEST	CONDITIONS OF TEST	REQUIREMENTS ¹⁾
Endurance Test at 70°C IEC 60115-1 4.25.1	1000 hours at 70°C 1.5 hours "ON" 0.5 hours "OFF"	$\leq \pm 0.25\%$
Endurance at UCT IEC 60115-1 4.25.3	1000 hours at 125°C without load	$\leq \pm 0.25\%$
Overload Test IEC 60115-1 4.13	Short time overload for 2 seconds 2.5 x rated voltage or ≤ 2 x limiting element voltage	$\leq \pm 0.05\%$
Thermal Shock IEC 60115-1 4.19 IEC 60068-2-14	Rapid change between upper and lower category temperature	$\leq \pm 0.05\%$
Damp Heat Steady State IEC 60115-1 4.24 IEC 60068-2-3	56 days at 40°C and 93% relative humidity	$\leq \pm 0.25\%$
Resistance to Soldering Heat IEC 60115-1 4.18 IEC 60068-2-20	10 seconds at 260°C solder bath temperature	$\leq \pm 0.05\%$

¹⁾ for a resistance range from 10Ω to 332KΩ, Limits for change of resistance at test acc. to CECC 40401-803

APPLICABLE SPECIFICATIONS

- CECC40000 / 40400 / 40401-803
- EN140400 / IEC 60115 – 1



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.