

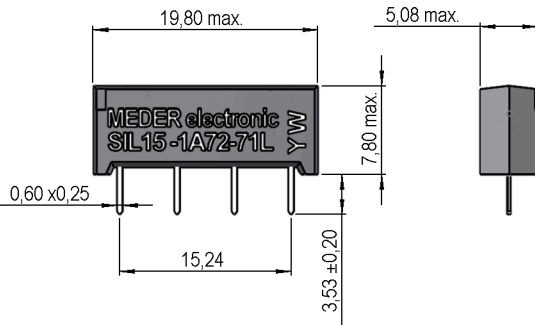


Dimensions




Layout 71D Pitch 2.54 / Top View



MARKING

MEDER-label, type
 Production code EN60062/factory code
 MEDER-Logo, Typ
 Produktionscode EN60062/Fertigungsstätte



tolerances according to DIN ISO 2768 m

Coil Data at 20 °C	Conditions	Min	Typ	Max	Unit
Coil resistance		1.800	2.000	2.200	Ohm
Coil voltage			15		VDC
Rated power			113		mW
Coil current			7,5		mA
Thermal resistance	max. Relay temperature = operating temperature + self heating		110		K/W
Inductance			250		mH
Pull-In voltage				10,5	VDC
Drop-Out voltage		2,2			VDC

Contact data 66/3	Conditions	Min	Typ	Max	Unit
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			10	W
Switching voltage	DC or Peak AC			200	V
Switching current	DC or Peak AC			0,5	A
Carry current	DC or Peak AC			1	A
Contact resistance static	Measured with 40% overdrive Start Value			150	mOhm
Insulation resistance	RH <45 %, 100 V test voltage	10			TOhm
Breakdown voltage (< 20 AT)	according to IEC 255-5	250			VDC
Operate time incl. bounce	measured with 40% overdrive			0,5	ms
Release time	measured with no coil excitation			0,1	ms
Capacity	@ 10 kHz across open switch		0,2		pF

Special Product Data	Conditions	Min	Typ	Max	Unit
Number of contacts		1			
Contact - form		A - NO			
Dielectric Strength Coil/Contact	according to IEC 255-5	1,5			kV DC
Insulation resistance Coil/Contact	RH <45%, 100 VDC test voltage	10			TOhm
Capacity Coil/Contact	@ 10 kHz		0,7		pF
Case colour		black			
Housing material		epoxy resin			
Connection pins		CuFe2P, tin plated			
Magnetic Shield		no			
Approval		UL-File No. NRNT2.E156887			
Approval		UL-File No. NRNT8.E156887			
Reach / RoHS conformity		yes			

Modifications in the sense of technical progress are reserved

Designed at: 04.03.04 Designed by: SCHELLHORN
 Last Change at: 23.03.10 Last Change by: KSTOPPEL

Approval at: 30.10.09 Approval by: KOLBRICH
 Approval at: 01.04.10 Approval by: KOLBRICH

Version: 02



Products for tomorrow...

Europe: +49 / 7731 8399 0 | Email: info@meder.com
USA: +1 / 508 295 0771 | Email: salesusa@meder.com
Asia: +852 / 2955 1682 | Email: salesasia@meder.com

Item No.:
3315172071
Item:
SIL15-1A72-71L

Environmental data	Conditions	Min	Typ	Max	Unit
Shock	1/2 sine wave duration 11ms			50	g
Vibration	from 10 - 2000 Hz			20	g
Operating temperature		-20		70	°C
Storage temperature		-35		95	°C
Soldering temperature	wave soldering max. 5 sec.			260	°C
Washability					fully sealed

General data	Conditions	Min	Typ	Max	Unit
Total weight			1,5		g
Packaging					Stange 25 pcs.

Modifications in the sense of technical progress are reserved

Designed at: 04.03.04 Designed by: SCHELLHORN
Last Change at: 23.03.10 Last Change by: KSTOPPEL

Approval at: 30.10.09 Approval by: KOLBRICH
Approval at: 01.04.10 Approval by: KOLBRICH

Version: 02