

# PRODUCT SPECIFICATION

DATE:01/10/2013

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler: <b>KPS28010T</b>	No.61P05025	REV
		SHEET 1 OF 6	2

## 4 Pin SSOP Low Input Current Photocoupler

### ●Features

- 1.Halogen Free.
- 2.Pb free and RoHS compliant.
- 3.High isolation voltage(BV=3750Vrms).
- 4.Small and thin package(4pin SOP,Pin pitch 1.27mm).
5. Low input current type (IF=1.0mA).
- 6.Current transfer ratio  
(CTR : 100~600% at IF=1.0mA Vce=5V)
- 7.High collector to emitter voltage(VCEO=80V).
- 8.High-speed switching tr=4 $\mu$ s(typ.),tf=3 $\mu$ s(typ.).
- 9.Agency Approvals
  - UL UL1577 / CUL C22.2 No.1 & NTC No.5  
File No. E169586
  - VDE EN 60747  
File No.40010469
  - FIMKO EN 60065 , EN 60950  
File No.NCS/FI24585 A1
  - CQC GB4943 / GB8898-2011  
File No.CQC10001049555 / CQC08001023986

### ●Applications


1. Programmable logic controllers.
2. Measuring instruments.
3. Power supply.
4. Hybrid IC.

# PRODUCT SPECIFICATION

DATE:01/10/2013


<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler: <b>KPS28010T</b>	No.61P05025	REV
		SHEET 2 OF 6	2

## 1. OUTSIDE DIMENSION : UNIT (mm)

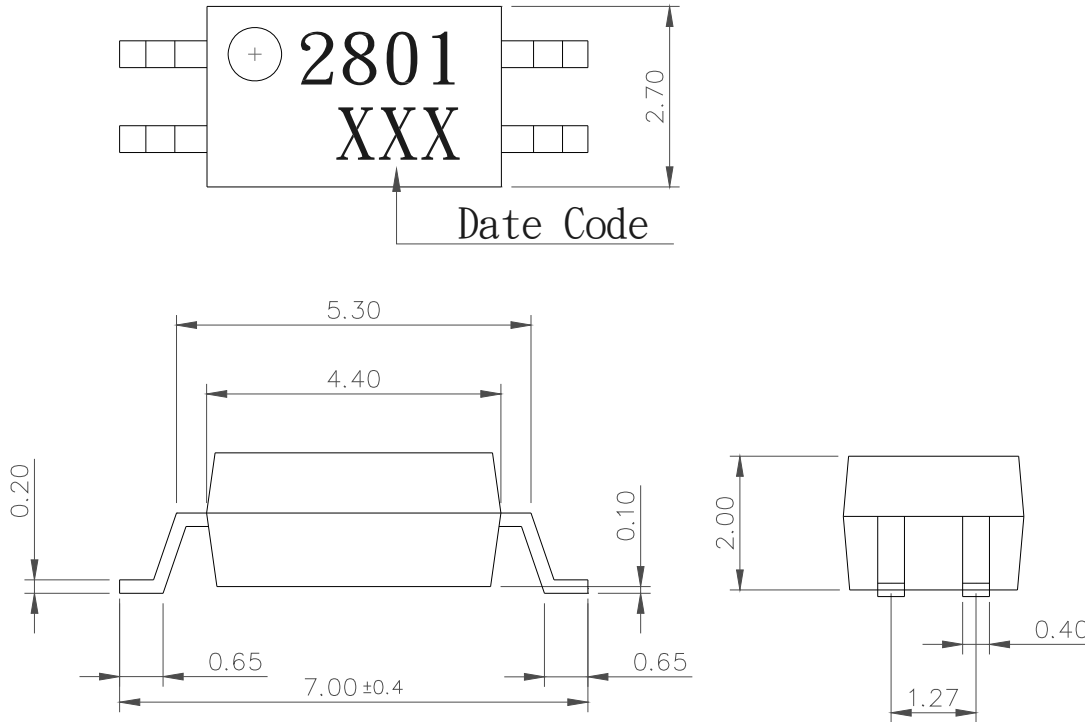

TOLERANCE : ±0.2mm


## 2. SCHEMATIC : TOP VIEW

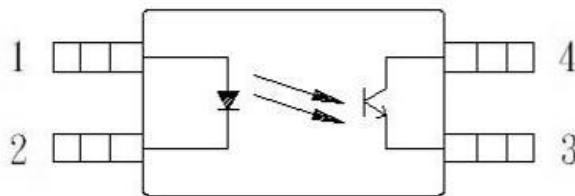

- 1. Anode
- 2. Cathode
- 3. Emitter
- 4. Collector

# PRODUCT SPECIFICATION

DATE:01/10/2013

	Photocoupler: <h2>KPS28010T</h2>	No.61P05025	REV
		SHEET 3 OF 6	2

## ●Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit	
Input	Forward current	$I_F$	50	mA
	Peak forward current(*1)	$I_{FP}$	1	A
	Reverse voltage	$V_R$	6	V
	Power dissipation	$P_D$	60	mW
	Power dissipation derating	$P_D/^\circ C$	0.6	mW/ $^\circ C$
Output	Collector-emitter voltage	$V_{CEO}$	80	V
	Emitter-collector voltage	$V_{ECO}$	6	V
	Collector current	$I_C$	50	mA
	Collector power dissipation	$P_C$	160	mW
	Collector power dissipation derating	$P_C/^\circ C$	1.2	mW/ $^\circ C$
Isolation voltage 1 minute(*2)	$V_{iso}$	3750	V <sub>rms</sub>	
Operating temperature	$T_{opr}$	-55 to +115	$^\circ C$	
Storage temperature	$T_{stg}$	-55 to +125	$^\circ C$	

\*1 PW=100 $\mu$ s,Duty Cycle=1%.


\*2 AC voltage for 1minute at T =25 $^\circ C$  ,RH=60% between input and output.

## ●Electro-optical Characteristics

Ta=25 $^\circ C$

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	$V_F$ IF=5mA	-	1.1	1.4	V
	Reverse current	$I_R$ VR=5V	-	-	5	$\mu A$
	Terminal capacitance	$C_t$ V=0, f=1MHz	-	60	-	pF
Output	Collector dark current	$I_{CEO}$ VCE=50V,IF=0mA	-	-	100	nA
Transfer characteristics	Current transfer ratio(IC/IF)	CTR IF=1mA, VCE=5V	100	-	600	%
	Collector-emitter saturation	$V_{CE(sat)}$ IF=10mA, IC=2mA	-	0.1	0.2	V
	Isolation resistance	Riso DC500V	$5 \times 10^{10}$	$10^{11}$	-	ohm
	Floating capacitance	$C_f$ V=0, f=1MHz	-	0.4	-	pF
	Response time (Rise)(*3)	$t_r$ Vce=5V, Ic=2mA, RL=100ohm	-	4	18	$\mu s$
Response time (Fall) (*3)	$t_f$	-	3	18	$\mu s$	

\*3 Test circuit for switching time

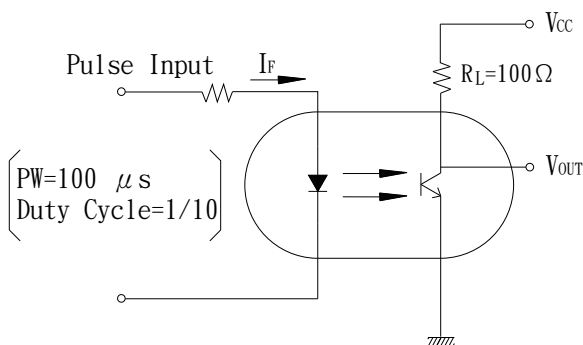

Classification table of current transfer ratio is shown below.

Model NO.	CTR(%)
KPS28010TA	100 TO 600
KPS28010TB	200 TO 500
KPS28010TC	160 TO 400
KPS28010TD	120 TO 300
KPS28010TE	100 TO 200

# PRODUCT SPECIFICATION

DATE:01/10/2013

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler: <b>KPS28010T</b>	No.61P05025	REV 2
		SHEET 4 OF 6	

Fig.1 Current Transfer Ratio vs. Forward Current

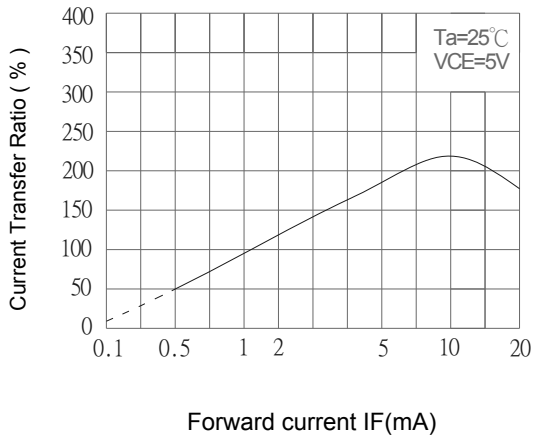


Fig.2 Collector Power Dissipation vs. Ambient Temperature

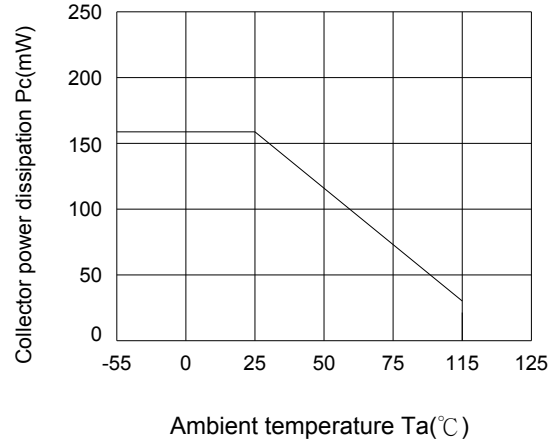


Fig.3 Collector Dark Current vs. Ambient Temperature

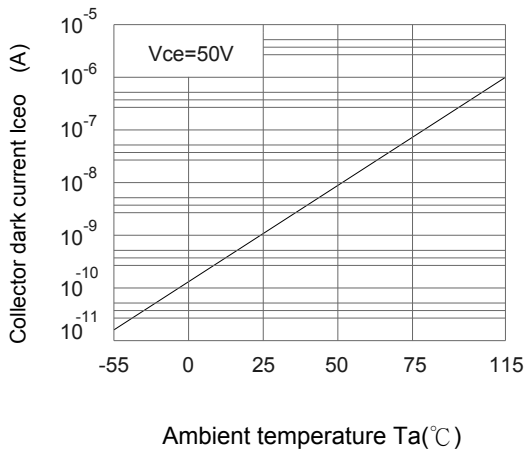


Fig.4 Forward Current vs. Ambient Temperature

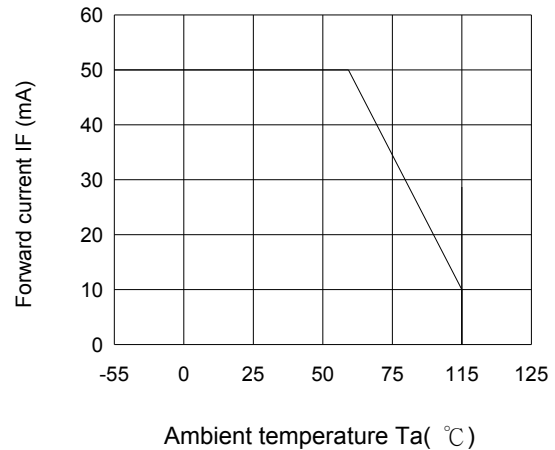


Fig.5 Forward Current vs. Forward Voltage


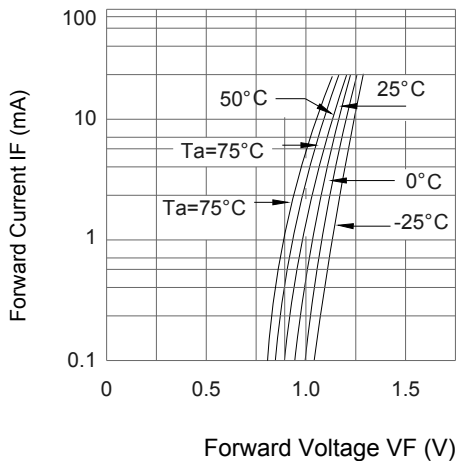


Fig.6 Collector Current vs. Collector-Emitter Voltage

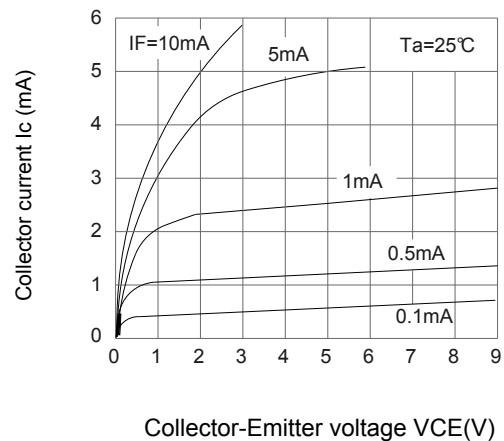


# PRODUCT SPECIFICATION


DATE:01/10/2013

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler: <h2 style="margin: 0;">KPS28010T</h2>	No.61P05025	REV 2
			SHEET 5 OF 6


**Fig.7 Collector-Emitter Saturation Voltage vs. Ambient Temperature**

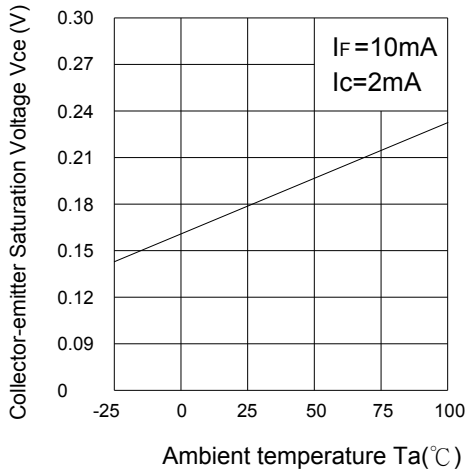


**Fig.8 Collector-emitter Saturation Voltage vs. Forward Current**

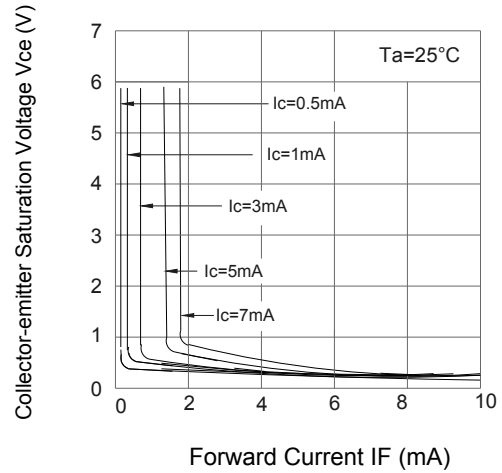


**Fig.9 Response Time vs. Load Resistance**

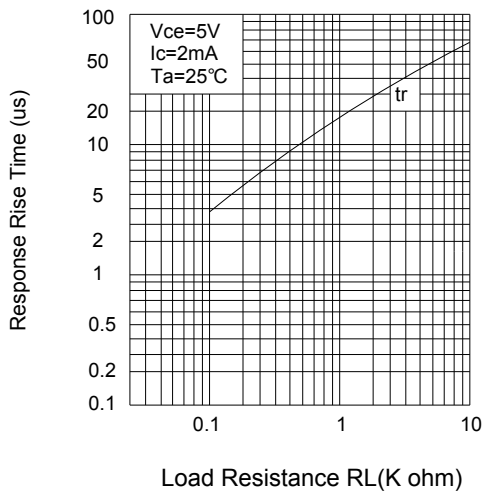

**Fig.10 Response Time vs. Load Resistance**

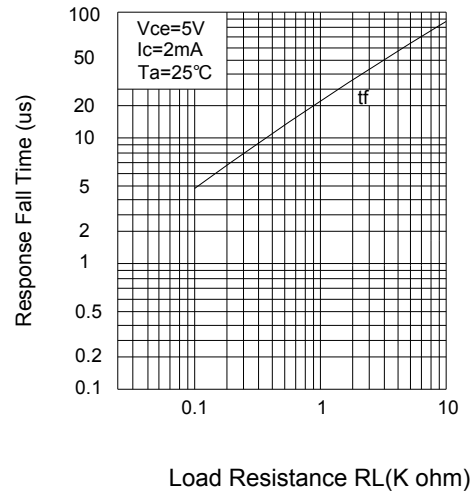

**Fig.11 Relative Current Transfer Ratio vs. Ambient Temperature**

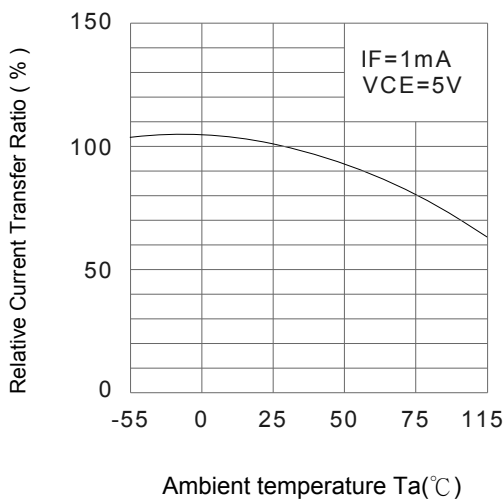

# PRODUCT SPECIFICATION

DATE:01/10/2013

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler: <b>KPS28010T</b>	No.61P05025	REV
		SHEET 6 OF 6	2

## NOTICE

The information contained in this document is a general product description and is subject to change without notice. Please contact cosmo in order to obtain the latest device data sheets before using any cosmo device. cosmo does not assume any responsibility for use of any circuitry described. No circuit patent licenses are implied. This publication is the property of cosmo. No part of this publication may be reproduced or copied in any form or by any means, or transferred to any third party without the prior written consent of cosmo Electronics Corporation.

The devices listed in this document are designed for general applications only in electronic equipment. No devices shall be deployed which require higher level of reliability such as:

- Medical and other life support equipments.
- Space application.
- Telecommunication equipment (trunk lines).
- Nuclear power control equipment.

Unless it received prior written approval from cosmo. cosmo takes no responsibility for damages arise form the improper usage of our device. Please contact cosmo for further information regarding the above notices.