




- Cw/w: 10PF Max 100KHz, 0.2V
- LL: 0.2μH Max @ 100KHz, 0.2V
- Polarity: 1-16, 4-13, 7-10 In-Phase
- Operating Temp: 0°C to 70°C

Electrical Specifications @ 25°C				
Part Number	OCL(μH Min) @ 100kHz, 200mV	Turns Ratio chip: cable (±5%)	DCR (Max)	Isolation HI-POT (Vrms)
	With 8mA DC Bias			
AHTA-1613S	80-130	1CT:1CT(TX)/1CT:1CT(RX)	0.3 Ω	500

All specifications subject to change without notice.

MECHANICAL

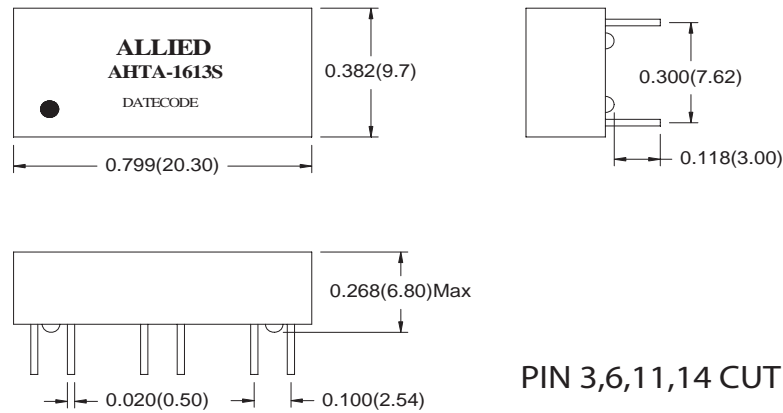

Dimensions: inch(mm)
Unless otherwise specified, all tolerances are ±0.010(0.25)

SCHEMATICS

