


**MATERIALS**

<b>BODY</b>	<b>BRASS NICKEL PLATED</b>
<b>CONTACT</b>	<b>GOLD PLATED</b>
<b>INSULATOR</b>	<b>PTFE/PPE</b>

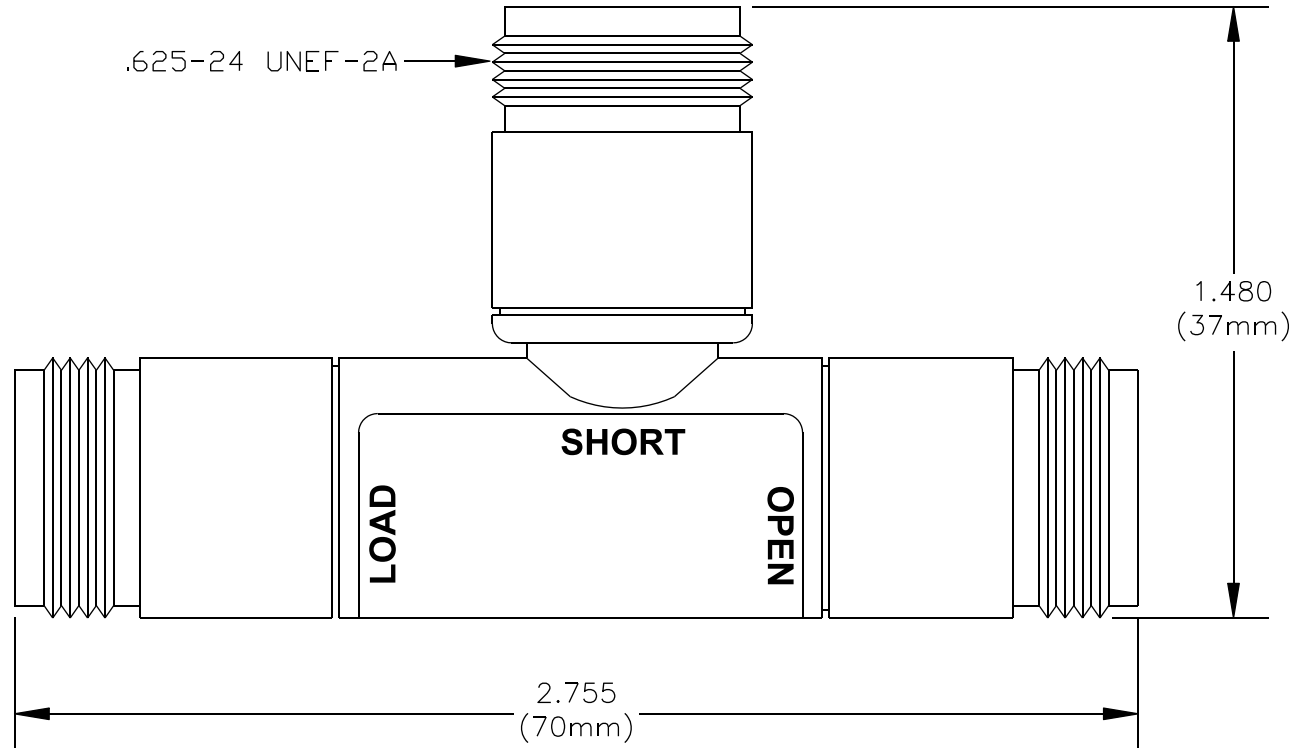

SPECIFICATIONS

Impedance	50Ω
Frequency	DC – 6 GHz
Open Return Loss	≤ 0.1 dB, DC – 6 GHz
Short Return Loss	≤ 0.1 dB, DC – 6 GHz
Load Return Loss	≤ 42 dB to 2.5 GHz ≤ 38 dB, 2.5 GHz – 6 GHz
Power Handling	1.0 W
Temp Range	-40°C to +85°C



**PASTERNACK ENTERPRISES, INC.**

P.O BOX 16759, IRVINE, CA 92623  
PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)

**COAXIAL & FIBER OPTICS**

DWG TITLE

**PE5512**

DES. N FEMALE 3-PORT FIELD CALIBRATION TOOL

REV. -	<b>FSCM NO. 53919</b>	CAD FILE 100208	SCALE N/A	SIZE A	127
--------	-----------------------	-----------------	-----------	--------	-----

**NOTES:**

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.