



1. Dimensions:

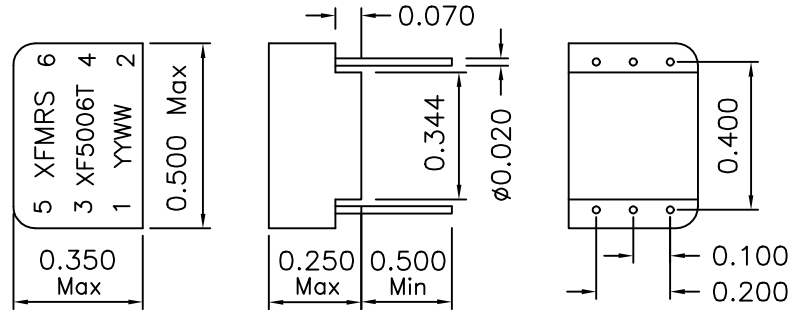

2. Schematic:

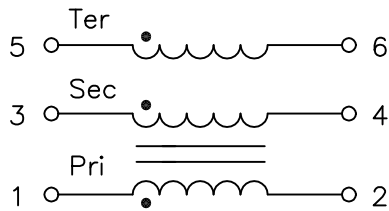

3 Windings

3. Electrical Specifications: @25°C

Isolation: 500 Vrms

Insulation Resistance: 10,000 MOhms

Turns Ratio: 1:1:1 ±5% (Pri/Sec/Ter)

Pri. OCL: 500μH Minimum @100KHz 50mV

Cw/w: 32.0pF Maximum @100KHz 50mV

Leakage Inductance: 0.40μH Maximum @100KHz 50mV

DC Resistance: 1.30 Ohms Maximum (Pri, Sec & Ter)

ET Constant: 8.5 V-us Minimum

Rise Time: 5.3ns Maximum

DOC REV: A/1

XFMRs Inc	Title: Data Coupling Transformer	
	P/N: XF5006T	REV. A
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	DWN.	李小锋 May-31-02
	CHK.	廖玉坤 May-31-02
	APP.	Joe Huff May-31-02