MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - TOGGLE

CATALOG LISTING
2TL204 SERIES CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN △5			CURRENT CAPSCITY (AMPS)								
	KEYWAY SIDE (1-2,4-5)	CENTER (1-2,4-5)	OPPOSITE KEYWAY (2-3,5-6)	RESISTIVE LOAD DC VOLTS			RESISTIVE LOAD AC VOLTS		LAMP LOAD		INCUSTIVE LOAD	
				28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC
2TL204-1	ON	OFF	ON	20	.75	.5	15	6	7	4	15	15
2TL204-2	OFF	NONE	ON	(REFER TO L191 FOR UL RATING)								
2TL204-3	ON	NONE	ON									
2TL204-21	NONE	OFF	ON									
2TL204-31	NONE	ON	ON									
2TL204-4	MOM OFF	NONE	ON	18	.75	.5	11	6	5	2	10	8
2TL204-5	MOM ON	OFF	ON	(REFER TO L192 FOR UL RATING)								
2TL204-6	MOM ON	NONE	OFF									
2TL204-7	MOM ON	OFF	MOM ON									
2TL204-8	MOM ON	NONE	ON									
2TL204-51	NONE	ON	MOM ON									
2TL204-61	MOM ON	OFF	NONE									

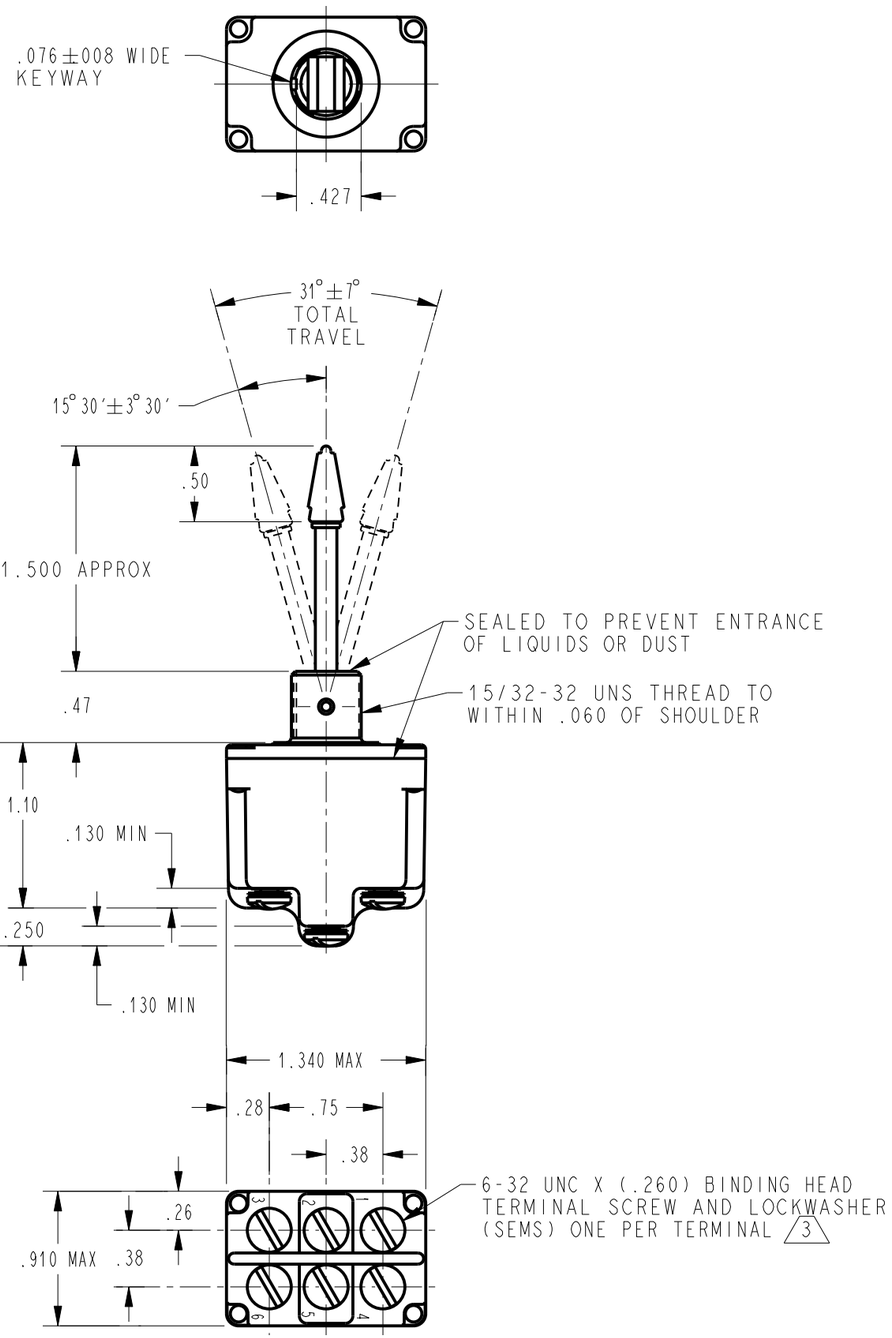



LOCKWASHER △3

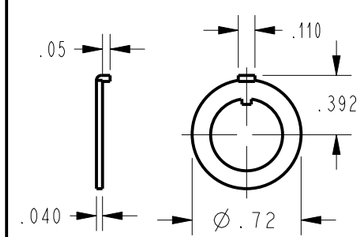

LOCKING RING △3



2X HEX NUT △3

L191 15A 125, 250, 277 VAC
1/2HP 125 VAC
1HP 250, 277 VAC
5A 125 VAC "L"

L192 10A 125, 250, 277 VAC
1/4HP 125 VAC,
1/2HP 250, 277 VAC
3A 125 VAC "L"

NOTES
1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
△3 FURNISHED UNASSEMBLED
△4 - FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA8
△5 APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .12 LB APPROX

ANSI Y14.5M-1982 APPLIES

CATALOG LISTING 2TL204 SERIES CHART 1
PAGE 1 OF 1
ISSUE 3

REVISIONS

A	CO-94437	GRT 29 NOV 99	09FEB04
B	0003048	CMH 09 FEB 04	MDM

PTC/CAD 2D
DRAWN GRT 29 NOV 99
CHECK JAF 29 NOV 99
CHECK
CHECK
CHECK
RELEASE NO. PR-21909
REPLACES