
Amphenol MFM Military Fibre Optic Miniature



- The MFM uses ceramic ferrule technology, with a ceramic alignment sleeve to reduce insertion loss
- Based on a Size 13 38999 Series III connector with keyway polarisation
- One piece monobloc termination construction for ease of cleaning
- Both shells and ferrules are keyed for optimum repeatability
- Environmentally sealed when mated
- Simple termination procedure
- Interchangeable cable sub assembly with other Amphenol product series

Amphenol

MFM Series – Military Fibre Optic Miniature

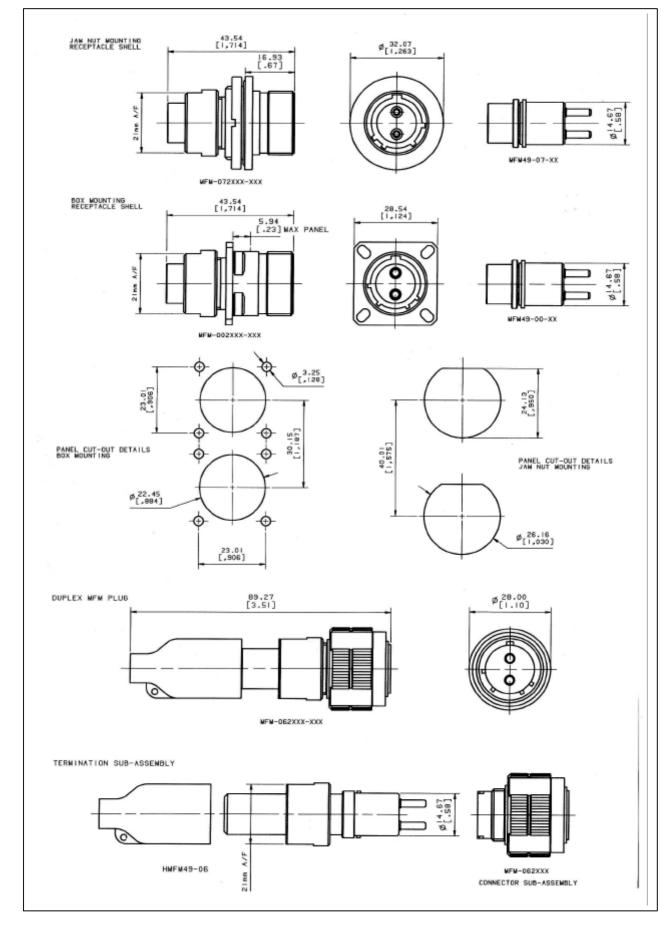

Amphenol

MFM Series – Military Fibre Optic Miniature

Performance

Temperature Range


Optical			
Attenuation	Typically 0.3dB with 62.5/125 cable		
Repeatability	>0.15dB		
Fibre Types	50/125 62.5/125		
	85/125 100/140		
	200/280		
Termination Method	Epoxy / Polish		


Environmental -55°C to +125°C Cable dependent


Mechanical				
Durability	>500 mating	S		
Materials	Shell	: Electroless Nickel or Olive Drab plated		
	Ferrule	: Zirconia Ceramic		
	Alignment Sleeve : Zirconia Ceramic			
	Seals	: Silicone		

Termination Tooling		
Basic Kit	927 – 100 – 3000	
Duplex MFM Add on Kit	927 – 100 – 3200	
Consumable Pack	927 – 100 – 6000	

Other items of tooling may be ordered separately – please consult factory.



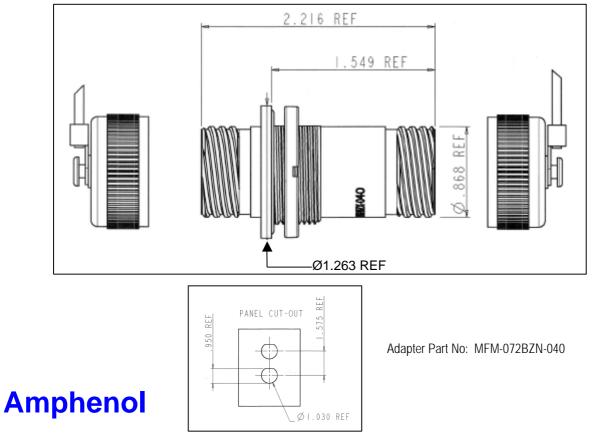

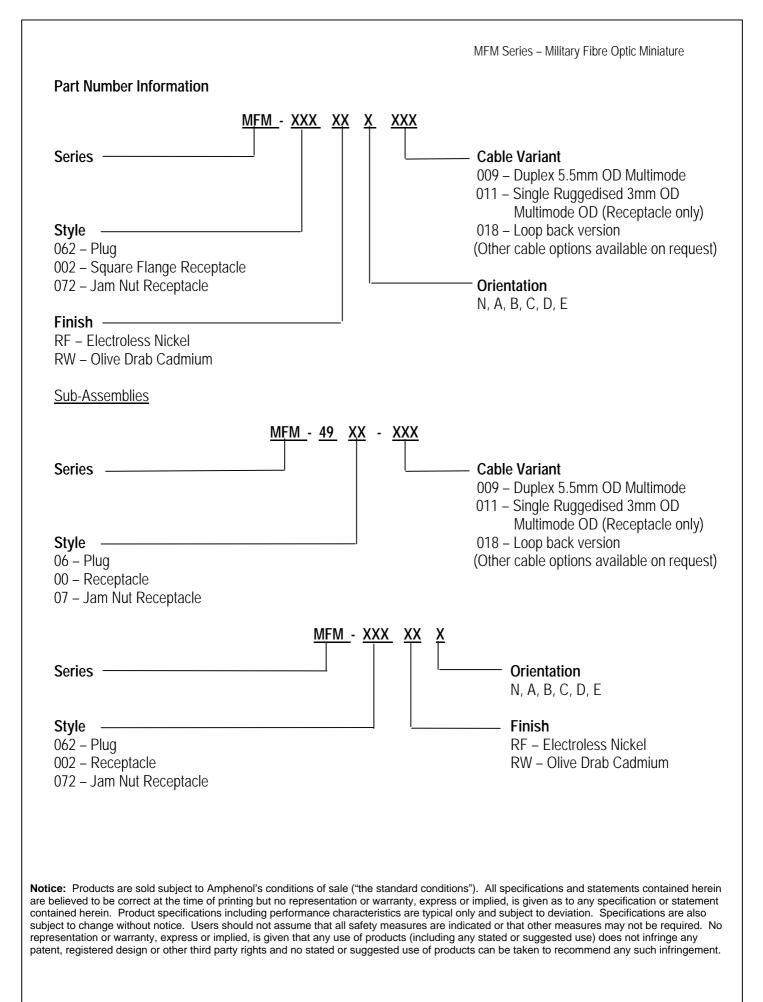

Amphenol

Thanet Way, Whitstable, Kent. CT5 3JF Tel: 01227 773200 Fax: 01227 276571